Guide du développeur

AWS SDK pour Go v2

Copyright © 2025 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

AWS SDK pour Go v2: Guide du développeur

Copyright © 2025 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Les marques commerciales et la présentation commerciale d'Amazon ne peuvent pas être utilisées en relation avec un produit ou un service extérieur à Amazon, d'une manière susceptible d'entraîner une confusion chez les clients, ou d'une manière qui dénigre ou discrédite Amazon. Toutes les autres marques commerciales qui ne sont pas la propriété d'Amazon appartiennent à leurs propriétaires respectifs, qui peuvent ou non être affiliés ou connectés à Amazon, ou sponsorisés par Amazon.

Table of Contents

Qu'est-ce que la AWS SDK pour Go v2 ? 1
Maintenance et prise en charge des versions majeures du SDK 1
Mise en route 2
Créez un compte Amazon 2
Installez la AWS SDK pour Go v2 2
Obtenez vos clés AWS d'accès 3
Pour obtenir votre identifiant de clé d'accès et votre clé d'accès secrète. 3
Rubriques en relation 4
Invoquer une opération 4
Configuration du kit SDK 6
Chargement de fichiers de configuration AWS partagés 6
Spécification de la AWS région 7
Configurer la région avec une variable d'environnement 7
Spécifier la région par programmation 7
Spécification des informations d'identification 7
Rôles IAM pour les tâches 9
Rôles IAM pour les instances Amazon EC2 9
Informations d'identification et configuration partagées 9
Variables d'environnement 13
Spécifier les informations d'identification par programmation 13
Authentification 16
Définitions 17
Flux de travail de résolution du schéma d'authentification 19
Supportés nativement `AuthScheme` 20
Points de terminaison du client 23
Personnalisation 23
V2 : `EndpointResolverV2` + `BaseEndpoint` 24
V1 : `EndpointResolver` 28
Migration 31
Client HTTP 35
Remplacement lors du chargement de la configuration 35
Expiration 35
composeur 36
Transport 37

Journalisation ... 40
Logger ... 40
ClientLogMode ... 40
Nouvelles tentatives et délais d'expiration ... 41
Rétrayeur standard ... 41
NopRetryer ... 42
Personnalisation du comportement ... 42
Délais ... 46
Utilisation de l'SDK ... 48
Création d'un client de service ... 48
NewFromConfig ... 48
New ... 49
Opérations du service d'appel ... 51
Transmission de paramètres à une opération de service ... 51
Remplacer les options du client pour Operation Call ... 53
Gestion des réponses aux opérations ... 53
Utilisation simultanée de clients de service ... 55
Utilisation des paginateurs d'opérations ... 57
Utilisation de programmes d'attente ... 59
Modification de la configuration du serveur ... 60
Annulation de la configuration avancée des serveurs ... 62
Gestion des erreurs dans le SDK ... 63
Erreurs de journalisation ... 63
Erreurs du client de service ... 64
Récupération des identifiants de demande ... 65
AWS Services d'utilisation ... 67
Sommes de contrôle Amazon S3 ... 67
Charger un objet ... 68
Télécharger un objet ... 71
Utilitaires du SDK ... 72
Utilitaires Amazon RDS ... 72
Authentification IAM ... 72
Amazon CloudFront Utilities ... 73
Signataire CloudFront d'URL Amazon ... 73
Service de métadonnées d' EC2 instance Amazon ... 74
Utilitaires Amazon S3 ... 75

Gestionnaires de transfert Amazon S3 75
Entrée de streaming invisible 85
Intergiciel 87
Rédaction d'un intergiciel personnalisé 88
Associer un intergiciel à tous les clients 90
Associer un intergiciel à une opération spécifique 90
Transmission des métadonnées vers le bas 91
Métadonnées fournies par le SDK 93
Transmission des métadonnées vers le haut 93
Questions fréquentes (FAQ) 96
Comment configurer le client HTTP de mon SDK ? Existe-t-il des directives ou des meilleures pratiques ? 96
Comment configurer les délais d'expiration des opérations ? 96
Les demandes effectuées par le SDK arrivent à expiration ou prennent trop de temps, comment puis-je résoudre ce problème ? 97
Comment corriger une `read: connection reset` erreur ? 97
Pourquoi est-ce que je reçois des erreurs de « signature non valide » lorsque j'utilise un proxy HTTP avec le SDK ? 98
Synchronisation des opérations du SDK 98
Tests unitaires 105
Se moquer des opérations des clients 105
Paginateurs moqueurs 107
Exemples de code 110
API Gateway 111
AWS contributions communautaires 111
Aurora 112
Principes de base 114
Actions 132
Amazon Bedrock 152
Actions 132
Amazon Bedrock Runtime 155
Scénarios 159
AI21 Laboratoires Jurassic-2 163
Amazon Titan Image Generator 165
Texte Amazon Titan 168
Anthropic Claude 170

AWS CloudFormation 178
Actions 132
CloudWatch Journaux 179
Actions 132
Fournisseur d'identité Amazon Cognito 182
Actions 132
Scénarios 159
Amazon DocumentDB 264
Exemples sans serveur 264
DynamoDB 266
Principes de base 114
Actions 132
Scénarios 159
Exemples sans serveur 264
AWS contributions communautaires 111
IAM 339
Principes de base 114
Actions 132
Kinesis 401
Exemples sans serveur 264
Lambda 404
Principes de base 114
Actions 132
Scénarios 159
Exemples sans serveur 264
AWS contributions communautaires 111
Amazon MSK 516
Exemples sans serveur 264
Partner Central 518
Actions 132
Amazon RDS 521
Principes de base 114
Actions 132
Exemples sans serveur 264
Amazon Redshift 557
Principes de base 114

Actions 132
Amazon S3 576
Principes de base 114
Actions 132
Scénarios 159
Exemples sans serveur 264
Amazon SNS 666
Actions 132
Scénarios 159
Exemples sans serveur 264
Amazon SQS 695
Actions 132
Scénarios 159
Exemples sans serveur 264
Migrer vers la version v2 728
Version minimale de Go 728
Modularisation 728
Chargement de la configuration 729
Exemples 26
Se moquer et `*iface` 732
Accréditations et fournisseurs d'accréditations 733
Informations d'identification statiques 14
Informations d'identification du rôle Amazon EC2 IAM 735
Informations d'identification du terminal 736
Informations d'identification du processus 736
AWS Security Token Service Informations d'identification 737
Clientèle du service 740
Construction pour les clients 740
Points de terminaison 742
Authentification 743
Invocation d'opérations d'API 743
Types de données de service 744
Paramètres du pointeur 745
Types d'erreurs 745
Paginateurs 747
Programmes d'attente 749

Demandes présignées 749
Demande de personnalisation 751
Entrée/sortie d'opération 751
Requête/réponse HTTP 755
Phases du gestionnaire 757
Fonctionnalités 759
Service de métadonnées d' EC2 instance Amazon 759
Gestionnaire de transferts Amazon S3 760
Utilitaires CloudFront de signature Amazon 761
Client de chiffrement Amazon S3 761
Modifications apportées aux personnalisations des services 762
Amazon S3 762
Sécurité 764
Protection des données 764
Validation de conformité 766
Résilience 767
Historique de la documentation 768
..... dcclxix

Qu'est-ce que la AWS SDK pour Go v2 ?

La AWS SDK pour Go version v2 fournit APIs des utilitaires que les développeurs peuvent utiliser pour créer des applications Go utilisant AWS des services tels qu'Amazon Elastic Compute Cloud (Amazon EC2) et Amazon Simple Storage Service (Amazon S3).

Le SDK élimine la complexité du codage directement par rapport à une interface de service Web. Il masque une grande partie de la plomberie de niveau inférieur, telle que l'authentification, les nouvelles tentatives de demande et la gestion des erreurs.

Le SDK inclut également des utilitaires utiles. Par exemple, le gestionnaire de téléchargement et de chargement d'Amazon S3 peut automatiquement diviser les objets volumineux en plusieurs parties et les transférer en parallèle.

Utilisez le guide du AWS SDK pour Go développeur pour vous aider à installer, configurer et utiliser le SDK. Ce guide fournit des informations de configuration, des exemples de code et une introduction aux utilitaires du SDK.

Maintenance et prise en charge des versions majeures du SDK

Pour plus d'informations sur la maintenance et le support des versions majeures du SDK et de leurs dépendances sous-jacentes, consultez les informations suivantes dans le guide de référence AWS SDKs and Tools :

- AWS SDKs et politique de maintenance des outils
- AWS SDKs et matrice de support des versions d'outils

Commencez avec AWS SDK pour Go

AWS SDK pour Go Nécessite Go 1.20 ou version ultérieure. Vous pouvez afficher votre version actuelle de Go en exécutant la commande suivante :

```
go version
```

Pour plus d'informations sur l'installation ou la mise à niveau de votre version de Go, consultez https://golang. org/doc/install.

Créez un compte Amazon

Avant de pouvoir utiliser la AWS SDK pour Go version 2, vous devez disposer d'un compte Amazon. Consultez Comment créer et activer un nouveau AWS compte ? pour plus de détails.

Installez la AWS SDK pour Go v2

La AWS SDK pour Go v2 utilise des modules Go, une fonctionnalité introduite dans Go 1.11. Initialisez votre projet local en exécutant la commande Go suivante.

```
go mod init example
```

Après avoir initialisé votre projet de module Go, vous pourrez récupérer le SDK et ses dépendances requises à l'aide de la `go get` commande. Ces dépendances seront enregistrées dans le `go.mod` fichier créé par la commande précédente.

Les commandes suivantes indiquent comment récupérer l'ensemble standard de modules SDK à utiliser dans votre application.

```
go get github.com/aws/aws-sdk-go-v2
go get github.com/aws/aws-sdk-go-v2/config
```

Cela permettra de récupérer le module SDK principal et le module de configuration utilisé pour charger la configuration AWS partagée.

Vous pouvez ensuite installer un ou plusieurs clients d'API de AWS service requis par votre application. Tous les clients d'API sont situés sous la hiérarchie `github.com/aws/aws-sdk-go-`

`v2/service` d'importation. Vous trouverez ici un ensemble complet de clients API actuellement pris en charge. Pour installer un client de service, exécutez la commande suivante pour récupérer le module et enregistrer la dépendance dans votre `go.mod` fichier. Dans cet exemple, nous récupérons le client d'API Amazon S3.

```
go get github.com/aws/aws-sdk-go-v2/service/s3
```

Obtenez vos clés AWS d'accès

Les clés d'accès se composent d'un ID de clé d'accès et d'une clé d'accès secrète, qui servent à signer des demandes par programme adressées à AWS. Si vous ne disposez pas de clés d'accès, vous pouvez les créer à l'aide de la console AWS de gestion. Nous vous recommandons d'utiliser des clés d'accès IAM plutôt que des clés d'accès au compte AWS root. IAM vous permet de contrôler en toute sécurité l'accès aux AWS services et aux ressources de votre AWS compte.

> **Note**
>
> Pour créer des clés d'accès, vous devez disposer des autorisations permettant d'effectuer les opérations IAM nécessaires. Pour plus d'informations, consultez la section Octroi à un utilisateur IAM de l'autorisation de gérer la politique de mot de passe et les informations d'identification dans le guide de l'utilisateur IAM.

Pour obtenir votre identifiant de clé d'accès et votre clé d'accès secrète.

1. Ouvrez la console IAM
2. Dans le menu de navigation, choisissez Utilisateurs.
3. Choisissez votre nom d'utilisateur IAM (pas la case à cocher).
4. Ouvrez l'onglet Informations d'identification de sécurité, puis choisissez Créer une clé d'accès.
5. Pour afficher la nouvelle clé d'accès, choisissez Afficher. Vos informations d'identification ressemblent à ce qui suit :
   - ID de clé d'accès : `AKIAIOSFODNN7EXAMPLE`
   - Clé d'accès secrète : `wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY`
6. Pour télécharger la paire de clés, choisissez Télécharger le fichier .csv. Stockez les clés dans un emplacement sûr.

> **Warning**
>
> Gardez les clés confidentielles pour protéger votre AWS compte et ne les partagez jamais avec des personnes extérieures à votre organisation.

Rubriques en relation

- Qu'est-ce que l'IAM ? dans le guide de l'utilisateur IAM.
- AWS Informations d'identification de sécurité dans le manuel de référence général d'Amazon Web Services.

Invoquer une opération

Après avoir installé le SDK, vous importez des AWS packages dans vos applications Go pour utiliser le SDK, comme indiqué dans l'exemple suivant, qui importe les bibliothèques, AWS Config et Amazon S3. Après avoir importé les packages du SDK, la configuration partagée du AWS SDK est chargée, un client est créé et une opération d'API est invoquée.

```
package main

import (
    "context"
    "log"
    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

func main() {
    // Load the Shared AWS Configuration (~/.aws/config)
    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatal(err)
    }

    // Create an Amazon S3 service client
    client := s3.NewFromConfig(cfg)

    // Get the first page of results for ListObjectsV2 for a bucket
```

```
    output, err := client.ListObjectsV2(context.TODO(), &s3.ListObjectsV2Input{
        Bucket: aws.String("amzn-s3-demo-bucket"),
    })
    if err != nil {
        log.Fatal(err)
    }

    log.Println("first page results")
    for _, object := range output.Contents {
        log.Printf("key=%s size=%d", aws.ToString(object.Key), *object.Size)
    }
}
```

Configuration du kit SDK

Dans la AWS SDK pour Go version V2, vous pouvez configurer des paramètres courants pour les clients de service, tels que l'enregistreur, le niveau de journalisation et la configuration des nouvelles tentatives. La plupart des paramètres sont facultatifs. Toutefois, pour chaque client de service, vous devez spécifier une AWS région et vos informations d'identification. Le SDK utilise ces valeurs pour envoyer des demandes à la région appropriée et signer les demandes avec les informations d'identification correctes. Vous pouvez spécifier ces valeurs par programmation dans le code ou via l'environnement d'exécution.

Chargement de fichiers de configuration AWS partagés

Il existe plusieurs méthodes pour initialiser un client d'API de service, mais voici le modèle le plus couramment recommandé aux utilisateurs.

Pour configurer le SDK afin d'utiliser les fichiers de configuration AWS partagés, utilisez le code suivant :

```
import (
  "context"
  "log"
  "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
  log.Fatalf("failed to load configuration, %v", err)
}
```

`config.LoadDefaultConfig(context.TODO())`construira un fichier AWS.config en utilisant les sources de configuration AWS partagées. Cela inclut la configuration d'un fournisseur d'informations d'identification, la configuration de la AWS région et le chargement de la configuration spécifique au service. Les clients de service peuvent être créés à l'aide du fichier chargé`aws.Config`, fournissant ainsi un modèle cohérent pour la construction de clients.

Pour plus d'informations sur les fichiers de configuration AWS partagés, consultez la section Configuration dans le guide de référence des outils AWS SDKs et des outils.

Spécification de la AWS région

Lorsque vous spécifiez la région, vous indiquez où envoyer les demandes, par exemple `us-west-2` ou`us-east-2`. Pour obtenir la liste des régions pour chaque service, consultez la section Points de terminaison et quotas du service dans le Référence générale d'Amazon Web Services.

Le SDK ne possède pas de région par défaut. Pour spécifier une région, procédez comme suit :

- Définissez la variable d'`AWS_REGIO`Nenvironnement sur la région par défaut.
- Définissez la région de manière explicite à l'aide de config. WithRegioncomme argument `config.LoadDefaultConfig` lors du chargement de la configuration.

RÉVISION : Si vous définissez une région à l'aide de toutes ces techniques, le SDK utilise la région que vous avez explicitement spécifiée.

Configurer la région avec une variable d'environnement

Linux, macOS ou Unix

```
export AWS_REGION=us-west-2
```

Windows

```
set AWS_REGION=us-west-2
```

Spécifier la région par programmation

```
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRegion("us-west-2"))
```

Spécification des informations d'identification

AWS SDK pour Go Nécessite des informations d'identification (une clé d'accès et une clé d'accès secrète) pour signer les demandes à AWS. Vous pouvez spécifier vos informations d'identification à plusieurs endroits, en fonction de votre cas d'utilisation particulier. Pour plus d'informations sur l'obtention d'informations d'identification, consultezCommencez avec AWS SDK pour Go.

Lorsque vous initialisez une `aws.Config` instance à l'aide de`config.LoadDefaultConfig`, le SDK utilise sa chaîne d'informations d'identification par défaut pour rechercher les informations

d'identification. AWS Cette chaîne d'informations d'identification par défaut recherche les informations d'identification dans l'ordre suivant :

1. Variables d'environnement.
   1. Informations d'identification statiques (`AWS_ACCESS_KEY_ID`,`AWS_SECRET_ACCESS_KEY`,`AWS_SESSION_TOKEN`)
   2. Jeton d'identité Web (`AWS_WEB_IDENTITY_TOKEN_FILE`)
2. Fichiers de configuration partagés.
   1. Le SDK utilise par défaut `credentials` le fichier sous `.aws` le dossier qui est placé dans le dossier d'accueil de votre ordinateur.
   2. Le SDK utilise par défaut `config` le fichier sous `.aws` le dossier qui est placé dans le dossier d'accueil de votre ordinateur.
3. Si votre application utilise une définition de tâche Amazon ECS ou une opération RunTask d'API, rôle IAM pour les tâches.
4. Si votre application s'exécute sur une EC2 instance Amazon, rôle IAM pour Amazon EC2.

Le SDK détecte et utilise automatiquement les fournisseurs intégrés, sans nécessiter de configurations manuelles. Par exemple, si vous utilisez des rôles IAM pour les EC2 instances Amazon, vos applications utilisent automatiquement les informations d'identification de l'instance. Il n'est pas nécessaire de configurer manuellement les informations d'identification dans votre application.

Il est AWS recommandé de spécifier les informations d'identification dans l'ordre suivant :

1. Utilisez des rôles IAM pour les tâches si votre application utilise une définition de tâche Amazon ECS ou une opération RunTask d'API.
2. Utilisez des rôles IAM pour Amazon EC2 (si votre application s'exécute sur une EC2 instance Amazon).

   Les rôles IAM fournissent aux applications présentes sur l'instance des informations d'identification de sécurité temporaires leur permettant de AWS passer des appels. Les rôles IAM permettent de distribuer et de gérer facilement les informations d'identification sur plusieurs EC2 instances Amazon.
3. Utilisez des informations d'identification ou des fichiers de configuration partagés.

   Les informations d'identification et les fichiers de configuration sont partagés entre d'autres AWS SDKs et AWS CLI. Pour des raisons de sécurité, nous vous recommandons d'utiliser un fichier

d'informations d'identification pour définir des valeurs sensibles telles que la clé d'accès IDs et les clés secrètes. Voici les exigences de mise en forme pour chacun de ces fichiers.

4. Utilisez des variables d'environnement.

   La définition de variables d'environnement est utile si vous effectuez des travaux de développement sur une machine autre qu'une EC2 instance Amazon.

Rôles IAM pour les tâches

Si votre application utilise une définition ou une `RunTask` opération de tâche Amazon ECS, utilisez les rôles IAM pour les tâches pour spécifier un rôle IAM qui peut être utilisé par les conteneurs d'une tâche.

Rôles IAM pour les instances Amazon EC2

Si vous exécutez votre application sur une EC2 instance Amazon, utilisez le rôle IAM de l'instance pour obtenir des informations d'identification de sécurité temporaires auxquelles passer AWS des appels.

Si vous avez configuré votre instance pour utiliser des rôles IAM, le SDK utilise automatiquement ces informations d'identification pour votre application. Il n'est pas nécessaire de spécifier manuellement ces informations d'identification.

Informations d'identification et configuration partagées

Les informations d'identification et les fichiers de configuration partagés peuvent être utilisés pour partager une configuration commune entre AWS SDKs d'autres outils. Si vous utilisez des informations d'identification différentes selon les outils ou les applications, vous pouvez utiliser des profils pour configurer plusieurs clés d'accès dans le même fichier de configuration.

Vous pouvez fournir plusieurs emplacements de fichiers d'identification ou de configuration en utilisant`config.Load0ptions`, par défaut, le SDK charge les fichiers stockés aux emplacements par défaut mentionnés dans le. Spécification des informations d'identification

```
import (
    "context"
    "github.com/aws/aws-sdk-go-v2/config"
)
```

```
// ...

cfg , err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedCredentialsFiles(
    []string{"test/credentials", "data/credentials"},
    ),
    config.WithSharedConfigFiles(
        []string{"test/config", "data/config"},
    )
)
```

Lorsque vous travaillez avec des informations d'identification et des fichiers de configuration partagés, si des profils dupliqués sont spécifiés, ils sont fusionnés pour résoudre un profil. En cas de conflit de fusion,

1. Si des profils dupliqués sont spécifiés dans un même fichier d'identifications/de configuration, les propriétés de profil spécifiées dans ce dernier profil sont prioritaires.
2. Si des profils dupliqués sont spécifiés dans plusieurs fichiers d'informations d'identification ou dans plusieurs fichiers de configuration, les propriétés des profils sont résolues selon l'ordre d'entrée des fichiers dans le`config.LoadOptions`. Les propriétés du profil dans ces derniers fichiers sont prioritaires.
3. Si un profil existe à la fois dans le fichier d'informations d'identification et dans le fichier de configuration, les propriétés du fichier d'informations d'identification sont prioritaires.

Si nécessaire, vous pouvez `LogConfigurationWarnings` activer `config.LoadOptions` et enregistrer les étapes de résolution du profil.

Création du fichier d'informations d'identification

Si vous n'avez pas de fichier d'informations d'identification partagé (`.aws/credentials`), vous pouvez utiliser n'importe quel éditeur de texte pour en créer un dans votre répertoire personnel. Ajoutez le contenu suivant à votre fichier d'informations d'identification, en *<YOUR_SECRET_ACCESS_KEY>* remplaçant *<YOUR_ACCESS_KEY_ID>* et par vos informations d'identification.

```
[default]
aws_access_key_id = <YOUR_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_SECRET_ACCESS_KEY>
```

L'`[default]`en-tête définit les informations d'identification du profil par défaut, que le SDK utilisera à moins que vous ne le configuriez pour utiliser un autre profil.

Vous pouvez également utiliser des informations d'identification de sécurité temporaires en ajoutant les jetons de session à votre profil, comme illustré dans l'exemple suivant :

```
[temp]
aws_access_key_id = <YOUR_TEMP_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_TEMP_SECRET_ACCESS_KEY>
aws_session_token = <YOUR_SESSION_TOKEN>
```

Le nom de section d'un profil autre que celui par défaut dans un fichier d'informations d'identification ne doit pas commencer par le mot`profile`. Pour en savoir plus, consultez le Guide AWS SDKs de référence des outils.

Création du fichier de configuration

Si vous n'avez pas de fichier d'informations d'identification partagé (`.aws/config`), vous pouvez utiliser n'importe quel éditeur de texte pour en créer un dans votre répertoire personnel. Ajoutez le contenu suivant à votre fichier de configuration, en le *<REGION>* remplaçant par la région souhaitée.

```
[default]
region = <REGION>
```

L'`[default]`en-tête définit la configuration du profil par défaut, que le SDK utilisera à moins que vous ne le configuriez pour utiliser un autre profil.

Vous pouvez utiliser des profils nommés comme indiqué dans l'exemple suivant :

```
[profile named-profile]
region = <REGION>
```

Le nom de section d'un profil autre que celui par défaut dans un fichier de configuration doit toujours commencer par le mot`profile`, suivi du nom de profil prévu. Pour en savoir plus, consultez le guide de référence AWS SDKs et les outils.

Spécification des profils

Vous pouvez inclure plusieurs clés d'accès dans le même fichier de configuration en associant chaque jeu de clés d'accès à un profil. Par exemple, dans votre fichier d'informations d'identification, vous pouvez déclarer plusieurs profils, comme suit.

```
[default]
aws_access_key_id = <YOUR_DEFAULT_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_DEFAULT_SECRET_ACCESS_KEY>

[test-account]
aws_access_key_id = <YOUR_TEST_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_TEST_SECRET_ACCESS_KEY>

[prod-account]
; work profile
aws_access_key_id = <YOUR_PROD_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_PROD_SECRET_ACCESS_KEY>
```

Par défaut, le kit SDK vérifie la variable d'environnement `AWS_PROFILE` afin de déterminer quel profil utiliser. Si aucune `AWS_PROFILE` variable n'est définie, le SDK utilise le `default` profil.

Parfois, vous souhaiterez peut-être utiliser un profil différent avec votre application. Par exemple, vous souhaitez utiliser les `test-account` informations d'identification avec votre `myapp` application. Vous pouvez utiliser ce profil à l'aide de la commande suivante :

```
$ AWS_PROFILE=test-account myapp
```

Vous pouvez également utiliser l'instruction du SDK pour sélectionner un profil soit en appelant `os.Setenv("AWS_PROFILE", "test-account")` avant d'appeler`config.LoadDefaultConfig`, soit en passant un profil explicite en argument, comme indiqué dans l'exemple suivant :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedConfigProfile("test-account"))
```

> **Note**
>
> Si vous spécifiez des informations d'identification dans des variables d'environnement, le SDK utilise toujours ces informations d'identification, quel que soit le profil que vous spécifiez.

Variables d'environnement

Par défaut, le SDK détecte les AWS informations d'identification définies dans votre environnement et les utilise pour signer les demandes. AWS Ainsi, vous n'avez pas besoin de gérer les informations d'identification dans vos applications.

Le SDK recherche les informations d'identification dans les variables d'environnement suivantes :

- `AWS_ACCESS_KEY_ID`
- `AWS_SECRET_ACCESS_KEY`
- `AWS_SESSION_TOKEN` (facultatif)

Les exemples suivants montrent comment configurer les variables d'environnement.

Linux, OS X ou Unix

```
$ export AWS_ACCESS_KEY_ID=YOUR_AKID
$ export AWS_SECRET_ACCESS_KEY=YOUR_SECRET_KEY
$ export AWS_SESSION_TOKEN=TOKEN
```

Windows

```
> set AWS_ACCESS_KEY_ID=YOUR_AKID
> set AWS_SECRET_ACCESS_KEY=YOUR_SECRET_KEY
> set AWS_SESSION_TOKEN=TOKEN
```

Spécifier les informations d'identification par programmation

`config.LoadDefaultConfig`vous permet de fournir une loi explicite. CredentialProviderlors du chargement des sources de configuration partagées. Pour transmettre un fournisseur d'informations d'identification explicite lors du chargement de la configuration partagée, utilisez config. WithCredentialsProvider. Par exemple, si elle `customProvider` fait référence à une instance d'`aws.CredentialProvider`implémentation, elle peut être transmise lors du chargement de la configuration comme suit :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithCredentialsProvider(customProvider))
```

Si vous fournissez explicitement des informations d'identification, comme dans cet exemple, le SDK utilise uniquement ces informations d'identification.

> **Note**
>
> Tous les fournisseurs d'informations d'identification transmis ou renvoyés par `LoadDefaultConfig` sont CredentialsCacheautomatiquement encapsulés dans un fichier. Cela permet une mise en cache et une rotation des informations d'identification qui sont sûres en matière de simultanéité. Si vous configurez explicitement un fournisseur `aws.Config` directement, vous devez également encapsuler explicitement le fournisseur avec ce type en utilisant NewCredentialsCache.

Informations d'identification statiques

Vous pouvez coder en dur les informations d'identification dans votre application à l'aide de celles-ci. NewStaticCredentialsProviderfournisseur d'informations d'identification pour définir explicitement les clés d'accès à utiliser. Par exemple :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider("AKID",
 "SECRET_KEY", "TOKEN")),
)
```

> **Warning**
>
> N'intégrez pas d'informations d'identification dans une application. Utilisez cette méthode uniquement à des fins de test.

Identifiants d'authentification unique

Le SDK fournit un fournisseur d'informations d'identification permettant de récupérer des informations d'identification temporaires AWS à l'aide de. AWS IAM Identity CenterÀ l'aide du AWS CLI, vous vous authentifiez auprès du portail AWS d'accès et autorisez l'accès aux AWS informations d'identification temporaires. Vous configurez ensuite votre application pour charger le profil d'authentification unique (SSO), et le SDK utilise vos informations d'identification SSO pour récupérer des informations d' AWS identification temporaires qui seront automatiquement renouvelées en cas d'expiration. Si

vos informations d'identification SSO expirent, vous devez les renouveler explicitement en vous reconnectant à votre compte IAM Identity Center à l'aide du. AWS CLI

Par exemple, vous pouvez créer un profil`dev-profile`, authentifier et autoriser ce profil à l'aide du AWS CLI, et configurer votre application comme indiqué ci-dessous.

1. Créez d'abord le `profile` et `sso-session`

```
[profile dev-profile]
sso_session = dev-session
sso_account_id = 012345678901
sso_role_name = Developer
region = us-east-1

[sso-session dev-session]
sso_region = us-west-2
sso_start_url = https://company-sso-portal.awsapps.com/start
sso_registration_scopes = sso:account:access
```

2. Connectez-vous AWS CLI à l'aide du pour authentifier et autoriser le profil SSO.

```
$ aws --profile dev-profile sso login
Attempting to automatically open the SSO authorization page in your default browser.
If the browser does not open or you wish to use a different device to authorize this
 request, open the following URL:

https://device.sso.us-west-2.amazonaws.com/

Then enter the code:

ABCD-EFGH
Successully logged into Start URL: https://company-sso-portal.awsapps.com/start
```

3. Configurez ensuite votre application pour utiliser le profil SSO.

```
import "github.com/aws/aws-sdk-go-v2/config"

// ...
```

```
cfg, err := config.LoadDefaultConfig(
    context.Background(),
    config.WithSharedConfigProfile("dev-profile"),
)
if err != nil {
    return err
}
```

Pour plus d'informations sur la configuration des profils SSO et l'authentification à l'aide de la AWS CLI section Configuration du AWS CLI à utiliser AWS IAM Identity Center dans le Guide de l' AWS CLI utilisateur. Pour plus d'informations sur la création programmatique du fournisseur d'informations d'identification SSO, consultez la documentation de référence de l'API ssocreds.

Autres fournisseurs d'informations d'identification

Le SDK fournit d'autres méthodes pour récupérer les informations d'identification dans le module des informations d'identification. Par exemple, vous pouvez récupérer des informations d'identification de sécurité temporaires AWS Security Token Service ou des informations d'identification provenant d'un stockage crypté.

Fournisseurs d'informations d'identification disponibles :

- ec2rolecreds — Récupérez les informations d'identification depuis Amazon Instances EC2 Roles via Amazon IMDS. EC2
- endpointcreds — Récupère les informations d'identification d'un point de terminaison HTTP arbitraire.
- processcreds — Récupère les informations d'identification d'un processus externe qui sera invoqué par le shell de l'environnement hôte.
- stscreds — Récupère les informations d'identification depuis AWS STS

Configuration de l'authentification

Permet AWS SDK pour Go de configurer le service de comportement d'authentification. Dans la plupart des cas, la configuration par défaut suffit, mais la configuration de l'authentification personnalisée permet d'adopter des comportements supplémentaires, tels que l'utilisation de fonctionnalités de service préliminaires.

Définitions

Cette section fournit une description détaillée des composants d'authentification du AWS SDK pour Go.

AuthScheme

An AuthSchemeest l'interface qui définit le flux de travail par lequel le SDK récupère l'identité de l'appelant et l'associe à une demande d'opération.

Un schéma d'authentification utilise les composants suivants, décrits en détail ci-dessous :

- Un identifiant unique qui identifie le schéma
- Un résolveur d'identité, qui renvoie l'identité de l'appelant utilisée lors du processus de signature (par exemple, vos AWS informations d'identification)
- Un signataire, qui effectue l'injection effective de l'identité de l'appelant dans la demande de transport de l'opération (par exemple, l'en-tête `Authorization` HTTP)

Les options de chaque client de service incluent un `AuthSchemes` champ qui est renseigné par défaut avec la liste des schémas d'authentification pris en charge par ce service.

AuthSchemeResolver

Les options de chaque service client incluent un `AuthSchemeResolver` champ. Cette interface, définie par service, est l'API appelée par le SDK pour déterminer les options d'authentification possibles pour chaque opération.

> **Important**
>
> Le résolveur de schéma d'authentification ne dicte PAS quel schéma d'authentification est utilisé. Il renvoie une liste de schémas pouvant être utilisés (« options »), le schéma final est sélectionné via un algorithme fixe décrit ici.

Option

Retournée par un appel à`ResolverAuthSchemes`, une option représente une option d'authentification possible.

Une option comprend trois ensembles d'informations :

- Un identifiant représentant le schéma possible
- Un ensemble opaque de propriétés à fournir au résolveur d'identité du schéma
- Un ensemble opaque de propriétés à fournir au signataire du schéma

Remarque sur les propriétés

Dans 99 % des cas d'utilisation, les appelants n'ont pas à se soucier des propriétés opaques de résolution d'identité et de signature. Le SDK extraira les propriétés nécessaires pour chaque schéma et les transmettra aux interfaces fortement typées exposées dans le SDK. Par exemple, le résolveur d'authentification par défaut pour les services code l'option SigV4 afin d'avoir des propriétés de signature pour le nom et la région de signature, dont les valeurs sont transmises au v4 configuré par le client. HTTPSignermise en œuvre lorsque SigV4 est sélectionné.

Identity

Une identité est une représentation abstraite de l'identité de l'appelant du SDK.

Le type d'identité le plus couramment utilisé dans le SDK est un ensemble de`aws.Credentials`. Dans la plupart des cas d'utilisation, l'appelant n'a pas à se préoccuper `Identity` d'une abstraction et peut travailler directement avec les types concrets.

> **Note**
>
> Pour préserver la rétrocompatibilité et éviter toute confusion entre les API, le type d'identité AWS spécifique au SDK `aws.Credentials` ne correspond pas directement à l'interface. `Identity` Ce mappage est géré en interne.

IdentityResolver

IdentityResolverest l'interface par laquelle un `Identity` est récupéré.

Des versions concrètes de `IdentityResolver` existent dans le SDK sous une forme fortement typée (par exemple aws. CredentialsProvider), le SDK gère ce mappage en interne.

L'appelant n'aura qu'à implémenter directement l'`IdentityResolver`interface lors de la définition d'un schéma d'authentification externe.

Signer

Le signataire est l'interface par laquelle une demande est complétée par l'appelant `Identity` récupéré.

Des versions concrètes de `Signer` existent dans le SDK sous une forme fortement typée (par exemple v4. HTTPSigner), le SDK gère ce mappage en interne.

L'appelant n'aura qu'à implémenter directement l'`Signer`interface lors de la définition d'un schéma d'authentification externe.

AuthResolverParameters

Chaque service utilise un ensemble spécifique d'entrées qui sont transmises à sa fonction de résolution, définie dans chaque package de services comme`AuthResolverParameters`.

Les paramètres du résolveur de base sont les suivants :

name	type	description
`Operation`	`string`	Nom de l'opération invoquée.
`Region`	`string`	La AWS région du client. Présent uniquement pour les services utilisant SigV4 [A].

Si vous implémentez votre propre résolveur, vous ne devriez jamais avoir à créer votre propre instance à partir de ses paramètres. Le SDK fournira ces valeurs par demande et les transmettra à votre implémentation.

Flux de travail de résolution du schéma d'authentification

Lorsque vous appelez une opération de AWS service via le SDK, la séquence d'actions suivante se produit après la sérialisation de la demande :

1. Le SDK appelle l'`AuthSchemeResolver.ResolveAuthSchemes()`API du client, en fournissant les paramètres d'entrée nécessaires, afin d'obtenir une liste des options possibles pour l'opération.
2. Le SDK parcourt cette liste et sélectionne le premier schéma qui répond aux conditions suivantes.
   - Un schéma avec l'ID correspondant est présent dans la propre `AuthSchemes` liste du client

- Le résolveur d'identité du schéma existe (n'est pas-`nil`) dans les options du client (vérifié via la `GetIdentityResolver` méthode du schéma, le mappage vers les types de résolveurs d'identité concrets décrits ci-dessus est géré en interne) (1)

3. En supposant qu'un schéma viable ait été sélectionné, le SDK invoque son `GetIdentityResolver()` API pour récupérer l'identité de l'appelant. Par exemple, le schéma d'authentification SigV4 intégré sera mappé au fournisseur du `Credentials` client en interne.
4. Le SDK appelle le résolveur d'identité `GetIdentity()` (par exemple `aws.CredentialProvider.Retrieve()` pour SigV4).
5. Le SDK appelle le résolveur du point de terminaison `ResolveEndpoint()` pour trouver le point de terminaison correspondant à la demande. Le point de terminaison peut inclure des métadonnées supplémentaires qui influencent le processus de signature (par exemple, un nom de signature unique pour S3 Object Lambda).
6. Le SDK appelle l'`Signer()`API du schéma d'authentification pour récupérer son signataire et utilise son `SignRequest()` API pour signer la demande avec l'identité de l'appelant précédemment récupérée.

(1) Si le SDK trouve l'option anonyme (ID`smithy.api#noAuth`) dans la liste, il est sélectionné automatiquement, car il n'existe aucun résolveur d'identité correspondant.

Supportés nativement **`AuthScheme`**

Les schémas d'authentification suivants sont pris en charge nativement par. AWS SDK pour Go

Nom	ID du schéma	Résolveur d'identité	Signer	Remarques
SigV4	`aws.auth#sigv4`	aws. CredentialsProvider	v4. HTTPSigner	Valeur par défaut actuelle pour la plupart des opérations AWS de service.
SigV4A	`aws.auth#sigv4a`	aws. CredentialsProvider	N/A	L'utilisation de SigV4a est limitée pour le moment, l'implémentation

Nom	ID du schéma	Résolveur d'identité	Signer	Remarques
				du signatair e est interne. Consultez cette annonce pour un nouveau module opt-in aws-http-authqui expose l'usage général de la signature APIs de requêtes HTTP.
SIGV4 Express	`com.amazonaws.s3#sigv4express`	s3. ExpressCredentials Provider	v4. HTTPSigner	Utilisé pour Express One Zone.
Support HTTP	`smithy.api#httpBearerAuth`	forgeron. TokenProvider	SmithyBearer.Signataire	Utilisé par Codecatalyst.
Anonyme	`smithy.api#noAuth`	N/A	s/o	Aucune authentification : aucune identité n'est requise et la demande n'est ni signée ni authentifiée.

Configuration de l'identité

Dans AWS SDK pour Go, les composants d'identité d'un schéma d'authentification sont configurés dans le client SDK. `Options` Le SDK récupère et utilise automatiquement les valeurs de ces composants pour le schéma qu'il sélectionne lorsqu'une opération est appelée.

> **Note**
>
> Pour des raisons de rétrocompatibilité, le SDK autorise implicitement l'utilisation du schéma d'authentification anonyme si aucun résolveur d'identité n'est configuré. Cela peut être réalisé manuellement en configurant tous les résolveurs d'identité sur le point d'un client `Options` `nil` (le résolveur d'identité sigv4 peut également être réglé sur). `aws.AnonymousCredentials{}`

Configuration du signataire

Dans AWS SDK pour Go, les composants signataires d'un schéma d'authentification sont configurés dans le client SDK. `Options` Le SDK récupère et utilise automatiquement les valeurs de ces composants pour le schéma qu'il sélectionne lorsqu'une opération est appelée. Aucune configuration supplémentaire n'est nécessaire.

Schéma d'authentification personnalisé

Afin de définir un schéma d'authentification personnalisé et de le configurer en vue de son utilisation, l'appelant doit effectuer les opérations suivantes :

1. Définition d'une AuthSchemeimplémentation
2. Enregistrez le schéma dans la liste des clients du `AuthSchemes` SDK
3. Instrumentez le client du SDK `AuthSchemeResolver` pour renvoyer une authentification `Option` avec l'ID du schéma, le cas échéant

> **Warning**
>
> Les services suivants ont un comportement d'authentification unique ou personnalisé. Nous vous recommandons de déléguer à l'implémentation par défaut et d'encapsuler en conséquence si vous avez besoin d'un comportement d'authentification personnalisé :

Service	Remarques
S3	Utilisation conditionnelle de SigV4A et SIGV4Express en fonction de l'entrée de l'opération.

Service	Remarques
EventBridge	Utilisation conditionnelle de SigV4A en fonction de l'entrée de l'opération.
Cognito	Certaines opérations sont uniquement anonymes.
SSO	Certaines opérations sont uniquement anonymes.
STS	Certaines opérations sont uniquement anonymes.

Configuration des points de terminaison clients

> **Warning**
>
> La résolution des points de terminaison est une rubrique avancée du SDK. En modifiant ces paramètres, vous risquez de casser votre code. Les paramètres par défaut doivent être applicables à la plupart des utilisateurs dans les environnements de production.

AWS SDK pour Go Permet de configurer un point de terminaison personnalisé à utiliser pour un service. Dans la plupart des cas, la configuration par défaut suffit. La configuration de points de terminaison personnalisés permet d'adopter des comportements supplémentaires, tels que l'utilisation de versions préliminaires d'un service.

Personnalisation

Il existe deux « versions » de la configuration de résolution des points de terminaison dans le SDK.

- v2, sortie au troisième trimestre 2023, configurée via :
  - `EndpointResolverV2`
  - `BaseEndpoint`
- v1, publié en même temps que le SDK, configuré via :
  - `EndpointResolver`

Nous recommandons aux utilisateurs de la version v1 de la solution des terminaux de migrer vers la version v2 pour avoir accès aux nouvelles fonctionnalités de service liées aux terminaux.

V2 : **`EndpointResolverV2`** + **`BaseEndpoint`**

Dans la résolution v2, `EndpointResolverV2` c'est le mécanisme définitif par lequel la résolution du point final se produit. La `ResolveEndpoint` méthode du résolveur est invoquée dans le cadre du flux de travail pour chaque demande que vous effectuez dans le SDK. Le nom d'hôte `Endpoint` renvoyé par le résolveur est utilisé tel quel lors de la demande (les sérialiseurs d'opérations peuvent toutefois toujours être ajoutés au chemin HTTP).

La résolution v2 inclut une configuration supplémentaire au niveau du client`BaseEndpoint`, qui est utilisée pour spécifier un nom d'hôte « de base » pour l'instance de votre service. La valeur définie ici n'est pas définitive : elle est finalement transmise en tant que paramètre au client `EndpointResolverV2` lors de la résolution finale (lisez la suite pour plus d'informations sur `EndpointResolverV2` les paramètres). L'implémentation du résolveur a alors la possibilité d'inspecter et éventuellement de modifier cette valeur pour déterminer le point final.

Par exemple, si vous effectuez une `GetObject` requête S3 sur un compartiment donné avec un client pour lequel vous avez spécifié un`BaseEndpoint`, le résolveur par défaut injectera le bucket dans le nom d'hôte s'il est compatible avec l'hôte virtuel (en supposant que vous n'avez pas désactivé l'hébergement virtuel dans la configuration du client).

En pratique, il `BaseEndpoint` sera très probablement utilisé pour diriger votre client vers une instance de développement ou de prévisualisation d'un service.

`EndpointResolverV2` paramètres

Chaque service utilise un ensemble spécifique d'entrées qui sont transmises à sa fonction de résolution, définie dans chaque package de services comme`EndpointParameters`.

Chaque service inclut les paramètres de base suivants, qui sont utilisés pour faciliter la résolution générale des terminaux au sein de AWS :

name	type	description
`Region`	`string`	La AWS région du client

name	type	description
`Endpoint`	`string`	La valeur définie pour `BaseEndpoint` dans la configuration du client
`UseFips`	`bool`	Si les points de terminaison FIPS sont activés dans la configuration du client
`UseDualStack`	`bool`	Si les points de terminaison à double pile sont activés dans la configuration du client

Les services peuvent spécifier des paramètres supplémentaires requis pour la résolution. Par exemple, les S3 `EndpointParameters` incluent le nom du compartiment, ainsi que plusieurs paramètres de fonctionnalités spécifiques à S3, tels que l'activation de l'adressage des hôtes virtuels.

Si vous implémentez la vôtre`EndpointResolverV2`, vous ne devriez jamais avoir à créer votre propre instance de`EndpointParameters`. Le SDK fournira les valeurs par demande et les transmettra à votre implémentation.

Remarque à propos d'Amazon S3

Amazon S3 est un service complexe dont bon nombre de fonctionnalités sont modélisées par le biais de personnalisations complexes des terminaux, telles que l'hébergement virtuel de compartiments, le MRAP S3, etc.

Pour cette raison, nous vous recommandons de ne pas remplacer l'`EndpointResolverV2`implémentation dans votre client S3. Si vous devez étendre son comportement de résolution, par exemple en envoyant des requêtes à une pile de développement locale en tenant compte des points de terminaison supplémentaires, nous vous recommandons d'encapsuler l'implémentation par défaut de manière à ce qu'elle revienne à la valeur par défaut en tant que solution de secours (voir les exemples ci-dessous).

Exemples

Avec **`BaseEndpoint`**

L'extrait de code suivant montre comment pointer votre client S3 vers une instance locale d'un service qui, dans cet exemple, est hébergée sur le périphérique de bouclage sur le port 8080.

```
client := s3.NewFromConfig(cfg, func (o *svc.Options) {
    o.BaseEndpoint = aws.String("https://localhost:8080/")
})
```

Avec **`EndpointResolverV2`**

L'extrait de code suivant montre comment injecter un comportement personnalisé dans la résolution du point de terminaison de S3 en utilisant. `EndpointResolverV2`

```
import (
    "context"
    "net/url"

    "github.com/aws/aws-sdk-go-v2/service/s3"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
)

type resolverV2 struct {
    // you could inject additional application context here as well
}

func (*resolverV2) ResolveEndpoint(ctx context.Context, params s3.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    if /* input params or caller context indicate we must route somewhere */ {
        u, err := url.Parse("https://custom.service.endpoint/")
        if err != nil {
            return smithyendpoints.Endpoint{}, err
        }
        return smithyendpoints.Endpoint{
            URI: *u,
        }, nil
    }

    // delegate back to the default v2 resolver otherwise
```

```
    return s3.NewDefaultEndpointResolverV2().ResolveEndpoint(ctx, params)
}

func main() {
    // load config...

    client := s3.NewFromConfig(cfg, func (o *s3.Options) {
        o.EndpointResolverV2 = &resolverV2{
            // ...
        }
    })
}
```

Avec les deux

L'exemple de programme suivant illustre l'interaction entre `BaseEndpoint` et`EndpointResolverV2`. Il s'agit d'un cas d'utilisation avancé :

```
import (
    "context"
    "fmt"
    "log"
    "net/url"

    "github.com/aws/aws-sdk-go-v2"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
)

type resolverV2 struct {}

func (*resolverV2) ResolveEndpoint(ctx context.Context, params s3.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    // s3.Options.BaseEndpoint is accessible here:
    fmt.Printf("The endpoint provided in config is %s\n", *params.Endpoint)

    // fallback to default
    return s3.NewDefaultEndpointResolverV2().ResolveEndpoint(ctx, params)
}

func main() {
```

```
    cfg, err := config.LoadDefaultConfig(context.Background())
    if (err != nil) {
        log.Fatal(err)
    }

    client := s3.NewFromConfig(cfg, func (o *s3.Options) {
        o.BaseEndpoint = aws.String("https://endpoint.dev/")
        o.EndpointResolverV2 = &resolverV2{}
    })

    // ignore the output, this is just for demonstration
    client.ListBuckets(context.Background(), nil)
}
```

Lorsqu'il est exécuté, le programme ci-dessus produit ce qui suit :

```
The endpoint provided in config is https://endpoint.dev/
```

V1 : `EndpointResolver`

> **Warning**
>
> La résolution du point de terminaison v1 est conservée pour des raisons de rétrocompatibilité et est isolée du comportement moderne de la résolution du point de terminaison v2. Il ne sera utilisé que si le `EndpointResolver` champ est défini par l'appelant.
> L'utilisation de la version 1 vous empêchera très probablement d'accéder aux fonctionnalités de service liées aux terminaux introduites avec ou après la publication de la résolution v2. Reportez-vous à la section « Migration » pour obtenir des instructions sur la procédure de mise à niveau.

A EndpointResolverpeut être configuré pour fournir une logique de résolution des points de terminaison personnalisée aux clients du service. Vous pouvez utiliser un résolveur de point de terminaison personnalisé pour remplacer la logique de résolution de point de terminaison d'un service pour tous les points de terminaison, ou uniquement pour un point de terminaison régional spécifique. Le résolveur de point de terminaison personnalisé peut déclencher la logique de résolution de point de terminaison du service pour revenir en arrière si un résolveur personnalisé ne souhaite pas résoudre un point de terminaison demandé. EndpointResolverWithOptionsFuncpeut être utilisé pour encapsuler facilement des fonctions afin de satisfaire l'`EndpointResolverWithOptions`interface.

A `EndpointResolver` peut être facilement configuré en transmettant le résolveur encapsulé WithEndpointResolverWithOptionsà LoadDefaultConfig, ce qui permet de remplacer les points de terminaison lors du chargement des informations d'identification, ainsi qu'en configurant le résultat `aws.Config` avec votre résolveur de point de terminaison personnalisé.

Le résolveur de point de terminaison reçoit le service et la région sous forme de chaîne, ce qui permet au résolveur de piloter dynamiquement son comportement. Chaque package de client de service possède une `ServiceID` constante exportée qui peut être utilisée pour déterminer quel client de service appelle votre résolveur de point de terminaison.

Un résolveur de point de terminaison peut utiliser la valeur d'erreur EndpointNotFoundErrorsentinelle pour déclencher une résolution de repli selon la logique de résolution par défaut du client du service. Cela vous permet de remplacer de manière sélective un ou plusieurs points de terminaison de manière fluide sans avoir à gérer une logique de repli.

Si l'implémentation de votre résolveur de point de terminaison renvoie une erreur autre que`EndpointNotFoundError`, la résolution de point de terminaison s'arrête et le fonctionnement du service renvoie une erreur à votre application.

Exemples

Avec solution de repli

L'extrait de code suivant montre comment un point de terminaison de service unique peut être remplacé pour DynamoDB par un comportement de remplacement pour les autres points de terminaison :

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
            SigningRegion: "us-west-2",
        }, nil
    }
    // returning EndpointNotFoundError will allow the service to fallback to it's
 default resolution
    return aws.Endpoint{}, &aws.EndpointNotFoundError{}
})
```

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

Sans solution de repli

L'extrait de code suivant montre comment un seul point de terminaison de service peut être remplacé pour DynamoDB sans adopter de comportement de remplacement pour les autres points de terminaison :

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
            SigningRegion: "us-west-2",
        }, nil
    }
    return aws.Endpoint{}, fmt.Errorf("unknown endpoint requested")
})

cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

Points de terminaison immuables

> **Warning**
>
> Le fait de définir un point de terminaison comme immuable peut empêcher certaines fonctionnalités du client de service de fonctionner correctement et entraîner un comportement indéfini. Il convient de faire preuve de prudence lorsque vous définissez un point de terminaison comme immuable.

Certains clients de service, tels qu'Amazon S3, peuvent modifier le point de terminaison renvoyé par le résolveur pour certaines opérations de service. Par exemple, Amazon S3 gérera automatiquement l'adressage du compartiment virtuel en mutant le point de terminaison résolu. Vous pouvez empêcher le SDK de modifier vos points de terminaison personnalisés en réglant sur. HostnameImmutable`true` Par exemple :

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
            SigningRegion: "us-west-2",
            HostnameImmutable: true,
        }, nil
    }
    return aws.Endpoint{}, fmt.Errorf("unknown endpoint requested")
})

cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

Migration

Lors de la migration de la version v1 vers la version v2 de la résolution des terminaux, les principes généraux suivants s'appliquent :

- Le renvoi d'un point de terminaison avec HostnameImmutabledéfini sur `false` équivaut à peu près `BaseEndpoint` à définir l'URL initialement renvoyée par la version v1 et à la laisser `EndpointResolverV2` comme URL par défaut.
- Le renvoi d'un point de terminaison HostnameImmutable défini sur `true` équivaut à peu près à l'implémentation d'un `EndpointResolverV2` qui renvoie l'URL initialement renvoyée par la v1.
  - La principale exception concerne les opérations utilisant des préfixes de point de terminaison modélisés. Une note à ce sujet figure plus bas.

Des exemples de ces cas sont fournis ci-dessous.

> **Warning**
>
> Les points de terminaison immuables V1 et la résolution V2 n'ont pas un comportement équivalent. Par exemple, les remplacements de signature pour des fonctionnalités personnalisées telles que S3 Object Lambda seraient toujours définis pour les points de terminaison immuables renvoyés via le code v1, mais il n'en serait pas de même pour la v2.

Remarque sur les préfixes d'hôte

Certaines opérations sont modélisées avec des préfixes d'hôte à ajouter au point de terminaison résolu. Ce comportement doit fonctionner en tandem avec la sortie de ResolveEndpoint V2 et, par conséquent, le préfixe hôte sera toujours appliqué à ce résultat.

Vous pouvez désactiver manuellement le préfixation de l'hôte du point de terminaison en appliquant un intergiciel, voir la section des exemples.

Exemples

Point de terminaison mutable

L'exemple de code suivant montre comment migrer un résolveur de point de terminaison v1 de base qui renvoie un point de terminaison modifiable :

```
// v1
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolver = svc.EndpointResolverFromURL("https://custom.endpoint.api/")
})

// v2
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    // the value of BaseEndpoint is passed to the default EndpointResolverV2
    // implementation, which will handle routing for features such as S3 accelerate,
    // MRAP, etc.
    o.BaseEndpoint = aws.String("https://custom.endpoint.api/")
})
```

Point de terminaison immuable

```
// v1
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolver = svc.EndpointResolverFromURL("https://custom.endpoint.api/",
 func (e *aws.Endpoint) {
        e.HostnameImmutable = true
    })
})

// v2
import (
    smithyendpoints "github.com/aws/smithy-go/endpoints"
```

```
)

type staticResolver struct {}

func (*staticResolver) ResolveEndpoint(ctx context.Context, params
 svc.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    // This value will be used as-is when making the request.
    u, err := url.Parse("https://custom.endpoint.api/")
    if err != nil {
        return smithyendpoints.Endpoint{}, err
    }
    return smithyendpoints.Endpoint{
        URI: *u,
    }, nil
}

client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolverV2 = &staticResolver{}
})
```

Désactiver le préfixe d'hôte

```
import (
    "context"
    "fmt"
    "net/url"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/<service>"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

// disableEndpointPrefix applies the flag that will prevent any
// operation-specific host prefix from being applied
type disableEndpointPrefix struct{}

func (disableEndpointPrefix) ID() string { return "disableEndpointPrefix" }
```

```
func (disableEndpointPrefix) HandleInitialize(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (middleware.InitializeOutput, middleware.Metadata, error) {
    ctx = smithyhttp.SetHostnameImmutable(ctx, true)
    return next.HandleInitialize(ctx, in)
}

func addDisableEndpointPrefix(o *<service>.Options) {
    o.APIOptions = append(o.APIOptions, (func(stack *middleware.Stack) error {
        return stack.Initialize.Add(disableEndpointPrefix{}, middleware.After)
    }))
}

type staticResolver struct{}

func (staticResolver) ResolveEndpoint(ctx context.Context, params
 <service>.EndpointParameters) (
    smithyendpoints.Endpoint, error,
) {
    u, err := url.Parse("https://custom.endpoint.api/")
    if err != nil {
        return smithyendpoints.Endpoint{}, err
    }

    return smithyendpoints.Endpoint{URI: *u}, nil
}


func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        panic(err)
    }

    svc := <service>.NewFromConfig(cfg, func(o *<service>.Options) {
        o.EndpointResolverV2 = staticResolver{}
    })

    _, err = svc.<Operation>(context.Background(), &<service>.<OperationInput>{ /* ...
 */ },
        addDisableEndpointPrefix)
    if err != nil {
        panic(err)
```

```
    }
}
```

Personnalisation du client HTTP

AWS SDK pour Go Utilise un client HTTP par défaut avec des valeurs de configuration par défaut. Bien que vous puissiez modifier certaines de ces valeurs de configuration, le client et le transport HTTP par défaut ne sont pas suffisamment configurés pour les clients utilisant le AWS SDK pour Go dans un environnement présentant des exigences de débit élevé et de faible latence. Pour plus d'informations, reportez-vous au Questions fréquentes (FAQ) car les recommandations de configuration varient en fonction des charges de travail spécifiques. Cette section décrit comment configurer un client HTTP personnalisé et comment utiliser ce client pour créer des AWS SDK pour Go appels.

Pour vous aider à créer un client HTTP personnalisé, cette section décrit comment NewBuildableClientconfigurer des paramètres personnalisés et comment utiliser ce client avec un client de AWS SDK pour Go service.

Définissons ce que nous voulons personnaliser.

Remplacement lors du chargement de la configuration

Des clients HTTP personnalisés peuvent être fournis lors d'un appel LoadDefaultConfigen encapsulant le client à l'aide de la HTTPClient touche With et en transmettant la valeur résultante à`LoadDefaultConfig`. Par exemple, pour nous faire passer `customClient` pour notre client :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithHTTPClient(customClient))
```

Expiration

Il `BuildableHTTPClient` peut être configuré avec une limite de délai d'expiration des demandes. Ce délai inclut le temps nécessaire pour se connecter, traiter les redirections et lire le corps de la réponse dans son intégralité. Par exemple, pour modifier le délai d'expiration du client :

```
import "github.com/aws/aws-sdk-go-v2/aws/transport/http"

// ...
```

```
httpClient := http.NewBuildableClient().WithTimeout(time.Second*5)
```

composeur

`BuildableHTTPClient`Il fournit un mécanisme de création pour créer des clients avec des options de numérotation modifiées. L'exemple suivant montre comment configurer les `Dialer` paramètres d'un client.

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
import "net"

// ...

httpClient := awshttp.NewBuildableClient().WithDialerOptions(func(d *net.Dialer) {
    d.KeepAlive = -1
    d.Timeout = time.Millisecond*500
})
```

Paramètres

composeur. KeepAlive

Ce paramètre représente la durée de conservation d'une connexion réseau active.

Réglez sur une valeur négative pour désactiver Keep-alives.

Définissez cette valeur sur 0 pour activer Keep-Alives si le protocole et le système d'exploitation le prennent en charge.

Les protocoles réseau ou les systèmes d'exploitation qui ne prennent pas en charge le mode Keep-Alives ignorent ce champ. Par défaut, le protocole TCP active Keep Alive.

Voir https://golang. org/pkg/net/#Dialer. KeepAlive

Définissez `KeepAlive` comme time.Duration.

Dialer.Timeout

Ce paramètre représente la durée maximale pendant laquelle un cadran attend qu'une connexion soit créée.

La valeur par défaut est de 30 secondes.

Voir https://golang. org/pkg/net/#Dialer .Délai d'expiration

Définissez `Timeout` comme time.Duration.

Transport

`BuildableHTTPClient`Il fournit un mécanisme de création pour créer des clients avec des options de transport modifiées.

Configuration d'un proxy

Si vous ne pouvez pas vous connecter directement à Internet, vous pouvez utiliser les variables d'environnement prises en charge par GO (HTTP_PROXY/HTTPS_PROXY) ou créer un client HTTP personnalisé pour configurer votre proxy. L'exemple suivant configure le client à utiliser PROXY_URL comme point de terminaison du proxy :

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
import "net/http"

// ...

httpClient := awshttp.NewBuildableClient().WithTransportOptions(func(tr
 *http.Transport) {
    proxyURL, err := url.Parse("PROXY_URL")
    if err != nil {
        log.Fatal(err)
    }
    tr.Proxy = http.ProxyURL(proxyURL)
})
```

Autres paramètres

Vous trouverez ci-dessous quelques autres `Transport` paramètres qui peuvent être modifiés pour régler le client HTTP. Tous les paramètres supplémentaires non décrits ici se trouvent dans la documentation du type de transport. Ces paramètres peuvent être appliqués comme indiqué dans l'exemple suivant :

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
import "net/http"

// ...
```

```
httpClient := awshttp.NewBuildableClient().WithTransportOptions(func(tr
 *http.Transport) {
    tr.ExpectContinueTimeout = 0
    tr.MaxIdleConns = 10
})
```

Transport. ExpectContinueTimeout

Si la demande comporte un en-tête « Expect : 100-continue », ce paramètre représente le temps maximum d'attente pour les premiers en-têtes de réponse d'un serveur après avoir entièrement écrit les en-têtes de demande. Ce délai n'inclut pas le temps d'envoi de l'en-tête de demande. Le client HTTP envoie sa charge utile une fois ce délai expiré.

Par défaut, 1 seconde.

Réglez sur 0 pour éviter tout délai d'expiration et envoyer la charge utile de la demande sans attendre. L'un des cas d'utilisation est celui où vous rencontrez des problèmes avec des proxys ou des services tiers qui prennent une session similaire à l'utilisation d'Amazon S3 dans la fonction illustrée plus loin.

Voir https://golang. org/pkg/net/http/#Transport. ExpectContinueTimeout

Définissez `ExpectContinue` comme time.Duration.

Transport. IdleConnTimeout

Ce paramètre représente la durée maximale pendant laquelle une connexion réseau inactive est maintenue entre les requêtes HTTP.

Réglez sur 0 pour une limite illimitée.

Voir https://golang. org/pkg/net/http/#Transport. IdleConnTimeout

Définissez `IdleConnTimeout` comme time.Duration.

Transport. MaxIdleConns

Ce paramètre représente le nombre maximum de connexions inactives (maintenues actives) sur tous les hôtes. Un cas d'utilisation pour augmenter cette valeur est lorsque vous constatez de nombreuses connexions en peu de temps provenant des mêmes clients

0 signifie qu'il n'y a pas de limite.

Voir https://golang. org/pkg/net/http/#Transport. MaxIdleConns

`MaxIdleConnsDéfini` comme int.

Transport. MaxIdleConnsPerHost

Ce paramètre représente le nombre maximum de connexions inactives (maintenues actives) à conserver par hôte. Un cas d'utilisation pour augmenter cette valeur est lorsque vous constatez de nombreuses connexions en peu de temps provenant des mêmes clients

La valeur par défaut est de deux connexions inactives par hôte.

Réglez sur 0 pour utiliser DefaultMaxIdleConnsPerHost (2).

Voir https://golang. org/pkg/net/http/#Transport. MaxIdleConnsPerHost

`MaxIdleConnsPerHost`Défini comme int.

Transport. ResponseHeaderTimeout

Ce paramètre représente le délai maximal d'attente avant qu'un client lise l'en-tête de réponse.

Si le client n'est pas en mesure de lire l'en-tête de la réponse pendant cette durée, la demande échoue avec une erreur de temporisation.

Veillez à définir cette valeur lorsque vous utilisez des fonctions Lambda de longue durée, car l'opération ne renvoie aucun en-tête de réponse tant que la fonction Lambda n'est pas terminée ou que le délai imparti n'est pas expiré. Cependant, vous pouvez toujours utiliser cette option avec l'opération d'API InvokeAsync ** **.

Par défaut, il n'y a pas de délai d'attente ; attendez indéfiniment.

Voir https://golang. org/pkg/net/http/#Transport. ResponseHeaderTimeout

Définissez `ResponseHeaderTimeout` comme time.Duration.

Transport. TLSHandshakeDélai d'expiration

Ce paramètre représente la durée maximale d'attente avant la fin d'une poignée de main TLS.

La valeur par défaut est de 10 secondes.

Zéro signifie qu'il n'y a aucun délai d'attente.

Voir https://golang. org/pkg/net/http/#Transport. TLSHandshakeDélai d'expiration

Définissez `TLSHandshakeTimeout` comme time.Duration.

Journalisation

AWS SDK pour Go Il dispose de fonctionnalités de journalisation qui permettent à votre application d'activer les informations de débogage pour le débogage et le diagnostic des problèmes ou des échecs liés aux demandes. L'interface Logger et ce ClientLogModesont les principaux composants à votre disposition pour déterminer comment et ce qui doit être enregistré par les clients.

Logger

Lors de la construction d'une Config, LoadDefaultConfigune configuration par défaut `Logger` est configurée pour envoyer des messages de journal à l'erreur standard du processus (stderr). Un enregistreur personnalisé qui répond à l'interface Logger peut être transmis en tant qu'argument en l'`LoadDefaultConfig`enveloppant avec config. WithLogger.

Par exemple, pour configurer nos clients afin qu'ils utilisent notre `applicationLogger` :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithLogger(applicationLogger))
```

Désormais, les clients configurés à l'aide de la construction `aws.Config` enverront des messages de journal à`applicationLogger`.

Enregistreurs sensibles au contexte

Une implémentation de Logger peut implémenter l'ContextLoggerinterface optionnelle. Les `WithContext` méthodes des enregistreurs qui implémentent cette interface seront invoquées dans le contexte actuel. Cela permet à vos implémentations de journalisation de renvoyer un nouveau `Logger` qui peut écrire des métadonnées de journalisation supplémentaires en fonction des valeurs présentes dans le contexte.

ClientLogMode

Par défaut, les clients du service ne produisent pas de messages de journal. Pour configurer les clients afin qu'ils envoient des messages de journal à des fins de débogage, utilisez le ClientLogModemembre on`Config`. `ClientLogMode`peut être configuré pour activer les messages de débogage pour :

- Signature version 4 (SigV4)
- Demander de nouvelles tentatives

- Requêtes HTTP
- Réponses HTTP

Par exemple, pour activer la journalisation des requêtes et des tentatives HTTP :

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithClientLogMode(aws.LogRetries | aws.LogRequest))
```

Consultez ClientLogModeles différents modes de journalisation des clients disponibles.

Nouvelles tentatives et délais d'expiration

Vous AWS SDK pour Go permet de configurer le comportement des nouvelles tentatives des demandes adressées aux services HTTP. Par défaut, les clients du service utilisent Retry.standard comme rétryer par défaut. Si la configuration ou le comportement par défaut ne répond pas aux exigences de votre application, vous pouvez ajuster la configuration du rétryer ou fournir votre propre implémentation de rétryer.

AWS SDK pour Go Fournit une interface AWS.Retryer qui définit l'ensemble des méthodes requises pour implémenter une nouvelle tentative. Le SDK fournit deux implémentations pour les nouvelles tentatives : Retry.standard et aws. NoOpRetryer.

Rétrayeur standard

Le retryer Retry.standard est l'`aws.Retryer`implémentation par défaut utilisée par les clients du SDK. Le réessayeur standard est un réessayeur à débit limité avec un nombre maximum de tentatives configurable et la possibilité d'ajuster la politique de rétrogradation des demandes.

Le tableau suivant définit les valeurs par défaut pour ce rétryer :

Propriété	Par défaut
Nombre maximum de tentatives	3
Délai de retour maximal	20 secondes

Lorsqu'une erreur réessayable se produit lors de l'appel de votre demande, le réessayeur standard utilise la configuration fournie pour retarder puis réessayer la demande. Les nouvelles tentatives

augmentent la latence globale de votre demande, et vous devez configurer une nouvelle tentative si la configuration par défaut ne répond pas aux exigences de votre application.

Consultez la documentation du package Retry pour plus de détails sur les erreurs considérées comme réessayables par l'implémentation standard du retryer.

NopRetryer

Les lois. NopRetryerest une `aws.Retryer` implémentation qui est fournie si vous souhaitez désactiver toutes les tentatives de nouvelle tentative. Lors de l'appel d'une opération client de service, ce réessayeur n'autorisera la demande qu'une seule fois, et toute erreur qui en résultera sera renvoyée à l'application appelante.

Personnalisation du comportement

Le SDK fournit un ensemble d'utilitaires d'assistance qui encapsulent une `aws.Retryer` implémentation et renvoie le rétryer fourni avec le comportement de nouvelle tentative souhaité. Vous pouvez remplacer le rétryer par défaut pour tous les clients, par client ou par opération en fonction des exigences de vos applications. Pour voir des exemples supplémentaires montrant comment procéder, consultez les exemples de documentation du package retry.

> **Warning**
>
> Si vous spécifiez une `aws.Retryer` implémentation globale à l'aide `deconfig.WithRetryer`, vous devez vous assurer de renvoyer une nouvelle instance de `aws.Retryer` chaque appel. Cela vous évitera de créer un bucket global de jetons de réessai pour tous les clients du service.

Limiter le nombre maximum de tentatives

Vous utilisez Retry. AddWithMaxAttemptspour encapsuler une `aws.Retryer` implémentation afin de définir le nombre maximum de tentatives à la valeur souhaitée. La définition du nombre maximum de tentatives à zéro permettra au SDK de réessayer toutes les erreurs réessayables jusqu'à ce que la demande aboutisse ou qu'une erreur non réessayable soit renvoyée.

Par exemple, vous pouvez utiliser le code suivant pour terminer le rétryer client standard avec un maximum de cinq tentatives :

```
import "context"
```

```
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.AddWithMaxAttempts(retry.NewStandard(), 5)
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

Limiter le délai maximal d'arrêt

Vous utilisez Retry. AddWithMaxBackoffDelaypour encapsuler une `aws.Retryer` implémentation et limiter le délai d'attente maximal autorisé entre deux nouvelles tentatives d'une demande ayant échoué.

Par exemple, vous pouvez utiliser le code suivant pour encapsuler le rétryer client standard avec le délai maximum souhaité de cinq secondes :

```
import "context"
import "time"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.AddWithMaxBackoffDelay(retry.NewStandard(), time.Second*5)
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

Réessayez d'autres codes d'erreur d'API

Vous utilisez Retry. AddWithErrorCodespour encapsuler une `aws.Retryer` implémentation et inclure des codes d'erreur d'API supplémentaires qui doivent être considérés comme réessayables.

Par exemple, vous pouvez utiliser le code suivant pour encapsuler le rétryer client standard afin d'inclure l'`NoSuchBucketException`exception Amazon S3 comme réessayable.

```
import "context"
import "time"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.AddWithErrorCodes(retry.NewStandard(), (*types.NoSuchBucketException)
(nil).ErrorCode())
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

Limitation du débit côté client

Le AWS SDK pour Go introduit un nouveau mécanisme de limitation du débit côté client dans la politique de réessai standard afin de s'aligner sur le comportement moderne. SDKs Ce comportement est contrôlé par le RateLimiterchamp des options d'un réessayeur.

A RateLimiter fonctionne comme un bucket de jetons d'une capacité définie, où les échecs de tentative d'opération consomment des jetons. Une nouvelle tentative qui tente de consommer plus de jetons que ce qui est disponible entraîne un échec de l'opération avec un QuotaExceededError.

L'implémentation par défaut est paramétrée comme suit (comment modifier chaque paramètre) :

- une capacité de 500 (définissez la valeur de RateLimiter lors de StandardOptions l'utilisation NewTokenRateLimit)

- une nouvelle tentative provoquée par un délai d'attente coûte 10 jetons (activé RetryTimeoutCost) StandardOptions
- une nouvelle tentative provoquée par d'autres erreurs coûte 5 jetons (RetryCostactivé StandardOptions)
- une opération réussie à la première tentative ajoute 1 jeton (NoRetryIncrement activé StandardOptions)
  - les opérations réussies lors de la deuxième tentative ou d'une tentative ultérieure n'ajoutent aucun jeton

Si vous trouvez que le comportement par défaut ne correspond pas aux besoins de votre application, vous pouvez le désactiver avec RateLimit.NONE.

Exemple : limiteur de débit modifié

```
import (
    "context"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/aws/ratelimit"
    "github.com/aws/aws-sdk-go-v2/aws/retry"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.Background(), config.WithRetryer(func()
 aws.Retryer {
    return retry.NewStandard(func(o *retry.StandardOptions) {
        // Makes the rate limiter more permissive in general. These values are
        // arbitrary for demonstration and may not suit your specific
        // application's needs.
        o.RateLimiter = ratelimit.NewTokenRateLimit(1000)
        o.RetryCost = 1
        o.RetryTimeoutCost = 3
        o.NoRetryIncrement = 10
    })
}))
```

Exemple : aucune limite de débit avec RateLimit.None

```
import (
```

```
    "context"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/aws/ratelimit"
    "github.com/aws/aws-sdk-go-v2/aws/retry"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.Background(), config.WithRetryer(func()
 aws.Retryer {
    return retry.NewStandard(func(o *retry.StandardOptions) {
        o.RateLimiter = ratelimit.None
    })
}))
```

Délais

Vous utilisez le package de contexte pour définir des délais ou des délais lorsque vous invoquez une opération client de service. Utilisez le contexte. WithDeadlinepour encapsuler le contexte de vos applications et définir une date limite à laquelle l'opération invoquée doit être terminée. Pour définir un délai d'expiration après un certain contexte `time.Duration` d'utilisation. WithTimeout. Le SDK transmet le contenu fourni `context.Context` au client de transport HTTP lors de l'appel d'une API de service. Si le contexte transmis au SDK est annulé ou devient annulé lors de l'appel de l'opération, le SDK ne réessaiera pas la demande et retournera à l'application appelante. Vous devez gérer l'annulation du contexte de manière appropriée dans votre application dans les cas où le contexte fourni au SDK est annulé.

Définition d'un délai d'attente

L'exemple suivant montre comment définir un délai d'expiration pour une opération du client de service.

```
import "context"
import "time"

// ...

ctx := context.TODO() // or appropriate context.Context value for your application
```

```
client := s3.NewFromConfig(cfg)

// create a new context from the previous ctx with a timeout, e.g. 5 seconds
ctx, cancel := context.WithTimeout(ctx, 5*time.Second)
defer cancel()

resp, err := client.GetObject(ctx, &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    // handle error
}
```

À l'aide du AWS SDK pour Go

Découvrez les méthodes courantes et recommandées de programmation avec le AWS SDK pour Go dans vos applications.

Rubriques

- Création d'un client de service
- Opérations du service d'appel
- Utilisation simultanée de clients de service
- Utilisation des paginateurs d'opérations
- Utilisation de programmes d'attente
- Gestion des erreurs dans la AWS SDK pour Go V2

Création d'un client de service

Les clients de service peuvent être créés à l'aide des `NewFromConfig` fonctions `New` ou des fonctions disponibles dans le package Go du client de service. Chaque fonction renverra un type de `Client` structure contenant les méthodes pour appeler le service. APIs `NewFromConfig`Chacun fournit le `New` même ensemble d'options configurables pour créer un client de service, mais propose des modèles de construction légèrement différents que nous examinerons dans les sections suivantes.

NewFromConfig

`NewFromConfig`La fonction fournit une interface cohérente pour créer des clients de service à l'aide du fichier AWS.config. Un `aws.Config` peut être chargé à l'aide de la configuration. LoadDefaultConfig. Pour plus d'informations sur la construction d'un`aws.Config`, consultezConfiguration du kit SDK. L'exemple suivant montre comment créer un client de service Amazon S3 à l'aide de la `NewFromConfig` fonction `aws.Config` et :

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...
```

```
    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        panic(err)
    }

    client := s3.NewFromConfig(cfg)
```

Configuration de remplacement

`NewFromConfig`peut prendre un ou plusieurs arguments fonctionnels susceptibles de faire muter la `Options` structure de configuration d'un client. Cela vous permet d'effectuer des dérogations spécifiques, telles que le changement de région ou la modification d'options spécifiques à un service, telles que l'`UseAccelerate`option Amazon S3. Par exemple :

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        panic(err)
    }

    client := s3.NewFromConfig(cfg, func(o *s3.Options) {
        o.Region = "us-west-2"
        o.UseAccelerate = true
    })
```

Les remplacements par rapport à la `Options` valeur du client sont déterminés par l'ordre dans lequel les arguments fonctionnels sont donnés. `NewFromConfig`

New

> **Note**
>
> Newest considérée comme une forme plus avancée de construction client. Nous vous recommandons de l'utiliser `NewFromConfig` pour la construction du client, car cela permet la

construction à l'aide de la `aws.Config` structure. Il `Options` n'est donc plus nécessaire de créer une instance de structure pour chaque client de service requis par votre application.

Newfunction is a client constructor fournit une interface pour construire des clients en utilisant uniquement la `Options` structure des packages clients pour définir les options de configuration du client. Par exemple, pour créer un client Amazon S3 en utilisant `New` :

```
import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/credentials"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    client := s3.New(s3.Options{
        Region:      "us-west-2",
        Credentials:
 aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey, secretKey,
 "")),
    })
```

Configuration de remplacement

Newpeut prendre un ou plusieurs arguments fonctionnels susceptibles de faire muter la `Options` structure de configuration d'un client. Cela vous permet d'effectuer des dérogations spécifiques, telles que le changement de région ou la modification d'options spécifiques à un service, telles que l'`UseAccelerate`option Amazon S3. Par exemple :

```
import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/credentials"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    options := s3.Options{
        Region:      "us-west-2",
        Credentials:
 aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey, secretKey,
 "")),
    }
```

```
    client := s3.New(options, func(o *s3.Options) {
        o.Region = "us-east-1"
        o.UseAccelerate = true
    })
```

Les remplacements par rapport à la `Options` valeur du client sont déterminés par l'ordre dans lequel les arguments fonctionnels sont donnés. `New`

Opérations du service d'appel

Une fois que vous avez une instance de client de service, vous pouvez l'utiliser pour appeler les opérations d'un service. Par exemple, pour appeler l'`GetObject`opération Amazon S3 :

```
response, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("obj-key"),
    })
```

Lorsque vous appelez une opération de service, le SDK valide l'entrée de manière synchrone, sérialise la demande, la signe avec vos informations d'identification, l'envoie à AWS, puis désérialise une réponse ou une erreur. Dans la plupart des cas, vous pouvez appeler directement les services de maintenance. Chaque méthode client d'opération de service renverra une structure de réponse d'opération et un type d'interface d'erreur. Vous devez toujours vérifier le `error` type pour déterminer si une erreur s'est produite avant de tenter d'accéder à la structure de réponse de l'opération de service.

Transmission de paramètres à une opération de service

Chaque méthode d'opération de service utilise une valeur Context.Context qui peut être utilisée pour définir les délais de demande qui seront respectés par le SDK. De plus, chaque opération de service utilisera une `<OperationName>Input` structure trouvée dans le package Go correspondant au service. Vous transmettez les paramètres d'entrée de l'API à l'aide de la structure d'entrée de l'opération.

Les structures d'entrée des opérations peuvent avoir des paramètres d'entrée tels que les types standard de type numérique Go, booléen, chaîne, carte et liste. Dans le cadre d'opérations d'API

plus complexes, un service peut avoir une modélisation plus complexe des paramètres d'entrée. Ces autres types, tels que les structures spécifiques au service et les valeurs d'énumération, se trouvent dans le package `types` Go du service.

En outre, les services peuvent faire la distinction entre la valeur par défaut d'un type Go et le fait que la valeur a été définie ou non par l'utilisateur. Dans ces cas, les paramètres d'entrée peuvent vous obliger à transmettre une référence de pointeur au type en question. Pour les types Go standard tels que les nombres, les booléens et les chaînes, des fonctions `From<Type>` pratiques sont `<Type>` disponibles dans l'aws pour faciliter cette conversion. Par exemple, AWS.String peut être utilisé pour convertir un en un `string` `*string` type pour les paramètres d'entrée qui nécessitent un pointeur vers une chaîne. Inversement, c'était. ToStringpeut être utilisé pour transformer un en a `*string` `string` tout en offrant une protection contre le déréférencement d'un pointeur nul. Les `To<Type>` fonctions sont utiles lors de la gestion des réponses du service.

Voyons un exemple de la façon dont nous pouvons utiliser un client Amazon S3 pour appeler l'`GetObject`API et construire notre entrée à l'aide du `types` package et des `aws.<Type>` assistants.

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"
    import "github.com/aws/aws-sdk-go-v2/service/s3/types"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        panic(err)
    }

    client := s3.NewFromConfig(cfg)

    resp, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        Bucket:       aws.String("amzn-s3-demo-bucket"),
        Key:          aws.String("keyName"),
        RequestPayer: types.RequestPayerRequester,
    })
```

Remplacer les options du client pour Operation Call

De la même manière que les options d'opération client peuvent être modifiées lors de la construction d'un client à l'aide d'arguments fonctionnels, les options du client peuvent être modifiées au moment où la méthode d'opération est appelée en fournissant un ou plusieurs arguments fonctionnels à la méthode d'opération de service. Cette action est sûre en matière de simultanéité et n'affectera pas les autres opérations simultanées sur le client.

Par exemple, pour remplacer la région client de « us-west-2 » à « us-east-1 » :

```
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRegion("us-west-2"))
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := s3.NewFromConfig(cfg)

    params := &s3.GetObjectInput{
        // ...
    }

    resp, err := client.GetObject(context.TODO(), params, func(o *Options) {
        o.Region = "us-east-1"
    })
```

Gestion des réponses aux opérations

Chaque opération de service possède une structure de sortie associée qui contient les membres de réponse aux opérations du service. La structure de sortie suit le modèle `<OperationName>Output` de dénomination suivant. Il se peut qu'aucun membre ne soit défini pour la sortie de certaines opérations. Après avoir appelé une opération de service, le type d'`error`argument de retour doit toujours être vérifié pour déterminer si une erreur s'est produite lors de l'appel de l'opération de service. Les erreurs renvoyées peuvent aller d'erreurs de validation d'entrée côté client à des réponses d'erreur côté service renvoyées au client. La structure de sortie de l'opération ne doit pas être accessible dans le cas où une erreur non nulle est renvoyée par le client.

Par exemple, pour enregistrer une erreur d'opération et revenir prématurément de la fonction appelante :

```
response, err := client.GetObject(context.TODO())
    if err != nil {
        log.Printf("GetObject error: %v", err)
        return
    }
```

Pour plus d'informations sur la gestion des erreurs, notamment sur la manière de détecter des types d'erreurs spécifiques, consultez TODO

Réponses avec `io.ReadCloser`

Certaines opérations d'API renvoient une structure de réponse contenant un membre de sortie qui est un`io.ReadCloser`. Ce sera le cas pour les opérations d'API qui exposent certains éléments de leur sortie dans le corps de la réponse HTTP elle-même.

Par exemple, l'`GetObject`opération Amazon S3 renvoie une réponse dont le `Body` membre est un `io.ReadCloser` pour accéder à la charge utile de l'objet.

> **Warning**
>
> Vous DEVEZ TOUJOURS `Close()` n'importe quel membre de `io.ReadCloser` sortie, que vous ayez consommé ou non son contenu. Si vous ne le faites pas, vous risquez de perdre des ressources et de créer des problèmes de lecture des corps de réponse pour les opérations appelées dans le futur.

```
resp, err := s3svc.GetObject(context.TODO(), &s3.GetObjectInput{...})
    if err != nil {
        // handle error
        return
    }
    // Make sure to always close the response Body when finished
    defer resp.Body.Close()

    decoder := json.NewDecoder(resp.Body)
    if err := decoder.Decode(&myStruct); err != nil {
        // handle error
        return
    }
```

Métadonnées de réponse

Toutes les structures de sortie des opérations de service incluent un `ResultMetadata` membre de type Middleware.Metadata. `middleware.Metadata`est utilisé par le middleware du SDK pour fournir des informations supplémentaires à partir d'une réponse de service qui n'est pas modélisée par le service. Cela inclut des métadonnées telles que`RequestID`. Par exemple, pour récupérer le code `RequestID` associé à une réponse de service afin d'aider le AWS Support à résoudre une demande :

```
import "fmt"
    import "log"
    import "github.com/aws/aws-sdk-go-v2/aws/middleware"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ..

    resp, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        // ...
    })
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    requestID, ok := middleware.GetRequestIDMetadata(resp.ResultMetadata)
    if !ok {
        fmt.Println("RequestID not included with request")
    }

    fmt.Printf("RequestID: %s\n", requestID)
```

Utilisation simultanée de clients de service

Vous pouvez créer des goroutines qui utilisent simultanément le même client de service pour envoyer plusieurs demandes. Vous pouvez utiliser un service client avec autant de goroutines que vous le souhaitez.

Dans l'exemple suivant, un client de service Amazon S3 est utilisé dans plusieurs goroutines. Cet exemple télécharge simultanément deux objets dans un compartiment Amazon S3.

```
import "context"
    import "log"
    import "strings"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := s3.NewFromConfig(cfg)

    type result struct {
        Output *s3.PutObjectOutput
        Err    error
    }

    results := make(chan result, 2)

    var wg sync.WaitGroup
    wg.Add(2)

    go func() {
    defer wg.Done()
        output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
            Bucket: aws.String("amzn-s3-demo-bucket"),
            Key:    aws.String("foo"),
            Body:   strings.NewReader("foo body content"),
        })
        results <- result{Output: output, Err: err}
    }()

    go func() {
        defer wg.Done()
        output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
            Bucket: aws.String("amzn-s3-demo-bucket"),
```

```
            Key:    aws.String("bar"),
            Body:   strings.NewReader("bar body content"),
        })
        results <- result{Output: output, Err: err}
    }()

    wg.Wait()

    close(results)

    for result := range results {
        if result.Err != nil {
            log.Printf("error: %v", result.Err)
            continue
        }
        fmt.Printf("etag: %v", aws.ToString(result.Output.ETag))
    }
```

Utilisation des paginateurs d'opérations

Généralement, lorsque vous récupérez une liste d'éléments, vous devrez peut-être vérifier la présence d'un jeton ou d'un marqueur dans la structure de sortie pour vérifier si le AWS service a renvoyé tous les résultats de votre demande. Si le jeton ou le marqueur est présent, vous l'utilisez pour demander la page de résultats suivante. Au lieu de gérer ces jetons ou marqueurs, vous pouvez utiliser les types de paginateurs disponibles dans le package de services.

Les assistants Paginator sont disponibles pour les opérations de service prises en charge et se trouvent dans le package Go du client de service. Pour créer un paginateur pour une opération prise en charge, utilisez la `New<OperationName>Paginator` fonction. Les fonctions de construction du paginateur utilisent le service`Client`, les paramètres `<OperationName>Input` d'entrée de l'opération et un ensemble facultatif d'arguments fonctionnels vous permettant de configurer d'autres paramètres de pagination facultatifs.

Le type de paginateur d'opération renvoyé fournit un moyen pratique d'itérer sur une opération paginée jusqu'à ce que vous ayez atteint la dernière page ou que vous ayez trouvé le ou les éléments recherchés par votre application. Un type de paginateur possède deux méthodes : `HasMorePages` et. `NextPage` `HasMorePages`renvoie une valeur booléenne indiquant `true` si la première page n'a pas été récupérée ou si des pages supplémentaires peuvent être récupérées à l'aide de l'opération. Pour récupérer la première page ou les pages suivantes de l'opération,

l'`NextPage`opération doit être appelée. `NextPage`prend `context.Context` et renvoie le résultat de l'opération et toute erreur correspondante. Comme les paramètres de retour de la méthode d'opération client, l'erreur de retour doit toujours être vérifiée avant de tenter d'utiliser la structure de réponse renvoyée. Consultez Gestion des réponses aux opérations.

L'exemple suivant utilise le `ListObjectsV2` paginateur pour répertorier jusqu'à trois pages de clés d'objet issues de l'`ListObjectV2`opération. Chaque page comprend jusqu'à 10 clés, définies par l'option de `Limit` pagination.

```
import "context"
    import "log"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := s3.NewFromConfig(cfg)

    params := &s3.ListObjectsV2Input{
        Bucket: aws.String("amzn-s3-demo-bucket"),
    }

    paginator := s3.NewListObjectsV2Paginator(client, params, func(o
 *s3.ListObjectsV2PaginatorOptions) {
        o.Limit = 10
    })

    pageNum := 0
    for paginator.HasMorePages() && pageNum < 3 {
        output, err := paginator.NextPage(context.TODO())
        if err != nil {
            log.Printf("error: %v", err)
            return
        }
        for _, value := range output.Contents {
            fmt.Println(*value.Key)
```

```
        }
        pageNum++
    }
```

Semblable à la méthode d'opération du client, les options du client telles que la région de requête peuvent être modifiées en fournissant un ou plusieurs arguments fonctionnels à`NextPage`. Pour plus d'informations sur le remplacement des options du client lors de l'appel d'une opération, consultezRemplacer les options du client pour Operation Call.

Utilisation de programmes d'attente

Lorsque vous interagissez avec AWS APIs des ressources asynchrones, vous devez souvent attendre qu'une ressource particulière soit disponible pour effectuer d'autres actions sur celle-ci.

Par exemple, l'API Amazon `CreateTable` DynamoDB renvoie immédiatement TableStatus un code CREATING, et vous ne pouvez pas appeler d'opérations de lecture ou d'écriture tant que le statut de la table n'est pas passé à. `ACTIVE`

L'écriture d'une logique permettant de vérifier en permanence l'état de la table peut s'avérer fastidieuse et source d'erreurs. Les serveurs vous aident à vous simplifier la tâche et se APIs chargent simplement de la tâche de sondage à votre place.

Par exemple, vous pouvez utiliser des serveurs pour savoir si une table DynamoDB est créée et prête pour une opération d'écriture.

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }
```

```
    client := dynamodb.NewFromConfig(cfg)

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client)

    // params is the input to api operation used by the waiter
    params := &dynamodb.DescribeTableInput {
        TableName: aws.String("test-table")
    }

    // maxWaitTime is the maximum wait time, the waiter will wait for
    // the resource status.
    maxWaitTime := 5 * time.Minutes

    // Wait will poll until it gets the resource status, or max wait time
    // expires.
    err := waiter.Wait(context.TODO(), params, maxWaitTime)
    if err != nil {
        log.Printf("error: %v", err)
        return
    }
    fmt.Println("Dynamodb table is now ready for write operations")
```

Modification de la configuration du serveur

Par défaut, le SDK utilise les valeurs de délai minimum et maximum configurées avec des valeurs optimales définies par les AWS services pour différents APIs. Vous pouvez annuler la configuration du serveur en fournissant des options fonctionnelles lors de la construction du serveur ou en invoquant une opération du serveur.

Par exemple, pour annuler la configuration du serveur pendant la construction du serveur

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"
```

```
    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := dynamodb.NewFromConfig(cfg)

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override minimum delay to 10 seconds
        o.MinDelay = 10 * time.Second

        // override maximum default delay to 300 seconds
        o.MaxDelay = 300 * time.Second
    })
```

La `Wait` fonction de chaque serveur inclut également des options fonctionnelles. Comme dans l'exemple ci-dessus, vous pouvez annuler la configuration du serveur par demande. `Wait`

```
// params is the input to api operation used by the waiter
    params := &dynamodb.DescribeTableInput {
        TableName: aws.String("test-table")
    }

    // maxWaitTime is the maximum wait time, the waiter will wait for
    // the resource status.
    maxWaitTime := 5 * time.Minutes

    // Wait will poll until it gets the resource status, or max wait time
    // expires.
    err := waiter.Wait(context.TODO(), params, maxWaitTime, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override minimum delay to 5 seconds
        o.MinDelay = 5 * time.Second
```

```
        // override maximum default delay to 120 seconds
        o.MaxDelay = 120 * time.Second
    })
    if err != nil {
        log.Printf("error: %v", err)
        return
    }
    fmt.Println("Dynamodb table is now ready for write operations")
```

Annulation de la configuration avancée des serveurs

Vous pouvez également personnaliser le comportement par défaut du serveur en fournissant une fonction réessayable personnalisée. Les options spécifiques au serveur permettent également de personnaliser les intergiciels `APIOptions` d'exploitation.

Par exemple, pour configurer les remplacements avancés des serveurs.

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := dynamodb.NewFromConfig(cfg)

    // custom retryable defines if a waiter state is retryable or a terminal state.
    // For example purposes, we will configure the waiter to not wait
    // if table status is returned as `UPDATING`
    customRetryable := func(ctx context.Context, params *dynamodb.DescribeTableInput,
        output *dynamodb.DescribeTableOutput, err error) (bool, error) {
        if output.Table != nil {
            if output.Table.TableStatus == types.TableStatusUpdating {
```

```
                // if table status is `UPDATING`, no need to wait
                return false, nil
            }
        }
    }

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override the service defined waiter-behavior
        o.Retryable = customRetryable
    })
```

Gestion des erreurs dans la AWS SDK pour Go V2

Les erreurs de AWS SDK pour Go retour qui répondent au type `error` d'interface Go. Vous pouvez utiliser `Error()` cette méthode pour obtenir une chaîne formatée du message d'erreur du SDK sans aucune manipulation particulière. Les erreurs renvoyées par le SDK peuvent implémenter une `Unwrap` méthode. La `Unwrap` méthode est utilisée par le SDK pour fournir des informations contextuelles supplémentaires sur les erreurs, tout en donnant accès à l'erreur sous-jacente ou à la chaîne d'erreurs. La `Unwrap` méthode doit être utilisée avec Errors.as pour gérer le déballage des chaînes d'erreurs.

Il est important que votre application vérifie si une erreur s'est produite après avoir invoqué une fonction ou une méthode capable de renvoyer un type d'`error`interface. La forme la plus élémentaire de gestion des erreurs ressemble à l'exemple suivant :

```
if err != nil {
    // Handle error
    return
}
```

Erreurs de journalisation

La forme la plus simple de gestion des erreurs consiste généralement à consigner ou à imprimer le message d'erreur avant de revenir ou de quitter l'application.

```
import "log"

// ...

if err != nil {
    log.Printf("error: %s", err.Error())
    return
}
```

Erreurs du client de service

Le SDK intègre toutes les erreurs renvoyées par les clients du service à la forge. OperationErrortype d'erreur. `OperationError`fournit des informations contextuelles sur le nom du service et le fonctionnement associés à une erreur sous-jacente. Ces informations peuvent être utiles pour les applications qui exécutent des opérations par lots sur un ou plusieurs services, grâce à un mécanisme centralisé de gestion des erreurs. Votre application peut accéder `errors.As` à ces `OperationError` métadonnées.

```
import "log"
import "github.com/aws/smithy-go"

// ...

if err != nil {
    var oe *smithy.OperationError
    if errors.As(err, &oe) {
        log.Printf("failed to call service: %s, operation: %s, error: %v",
 oe.Service(), oe.Operation(), oe.Unwrap())
    }
    return
}
```

Réponses aux erreurs de l'API

Les opérations de service peuvent renvoyer des types d'erreur modélisés pour indiquer des erreurs spécifiques. Ces types modélisés peuvent être utilisés `errors.As` pour déballer et déterminer si l'échec du fonctionnement est dû à une erreur spécifique. Par exemple, Amazon S3 `CreateBucket` peut renvoyer une BucketAlreadyExistserreur si un compartiment du même nom existe déjà.

Par exemple, pour vérifier si une erreur était une `BucketAlreadyExists` erreur :

```
import "log"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"

// ...

if err != nil {
    var bne *types.BucketAlreadyExists
    if errors.As(err, &bne) {
        log.Println("error:", bne)
    }
    return
}
```

Toutes les erreurs de réponse de l'API de service implémentent le Smithy. APIErrortype d'interface. Cette interface peut être utilisée pour gérer les réponses d'erreur de service modélisées ou non modélisées. Ce type permet d'accéder au code d'erreur et au message renvoyés par le service. De plus, ce type indique si l'erreur est due au client ou au serveur, s'il est connu.

```
import "log"
import "github.com/aws/smithy-go"

// ...

if err != nil {
    var ae smithy.APIError
    if errors.As(err, &ae) {
        log.Printf("code: %s, message: %s, fault: %s", ae.ErrorCode(),
 ae.ErrorMessage(), ae.ErrorFault().String())
    }
    return
}
```

Récupération des identifiants de demande

Lorsque vous travaillez avec le AWS Support, il peut vous être demandé de fournir l'identifiant de demande qui identifie la demande que vous tentez de résoudre. Vous pouvez utiliser http. ResponseErroret utilisez la `ServiceRequestID()` méthode pour récupérer l'identifiant de demande associé à la réponse d'erreur.

```
import "log"
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
```

```
// ...

if err != nil {
    var re *awshttp.ResponseError
    if errors.As(err, &re) {
        log.Printf("requestID: %s, error: %v", re.ServiceRequestID(), re.Unwrap());
    }
    return
}
```

Identifiants de demande Amazon S3

Les demandes Amazon S3 contiennent des identifiants supplémentaires qui peuvent être utilisés pour aider le AWS Support à résoudre votre demande. Vous pouvez utiliser s3. ResponseErroret appelez `ServiceRequestID()` et `ServiceHostID()` pour récupérer l'ID de demande et l'ID d'hôte.

```
import "log"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

if err != nil {
    var re s3.ResponseError
    if errors.As(err, &re) {
        log.Printf("requestID: %s, hostID: %s request failure", re.ServiceRequestID(),
 re.ServiceHostID());
    }
    return
}
```

Utiliser la AWS SDK pour Go v2 avec les AWS services

Pour appeler un AWS service, vous devez d'abord créer une instance de client de service. Un client de service fournit un accès de bas niveau à chaque action d'API pour ce service. Par exemple, vous créez un client de service Amazon S3 pour passer des appels à Amazon S3 APIs.

Lorsque vous appelez des opérations de service, vous transmettez les paramètres d'entrée sous forme de structure. Un appel réussi produira une structure de sortie contenant la réponse de l'API de service. Par exemple, une fois que vous avez appelé avec succès une action de création de compartiment Amazon S3, l'action renvoie une structure de sortie indiquant l'emplacement du compartiment.

Pour obtenir la liste des clients du service, y compris leurs méthodes et paramètres, consultez la référence des AWS SDK pour Go API.

Protection de l'intégrité des données avec des checksums

Amazon Simple Storage Service (Amazon S3) permet de spécifier une somme de contrôle lorsque vous chargez un objet. Lorsque vous spécifiez une somme de contrôle, elle est stockée avec l'objet et peut être validée lors du téléchargement de l'objet.

Les checksums fournissent une couche supplémentaire d'intégrité des données lorsque vous transférez des fichiers. Avec les checksums, vous pouvez vérifier la cohérence des données en confirmant que le fichier reçu correspond au fichier d'origine. Pour plus d'informations sur les checksums avec Amazon S3, consultez le guide de l'utilisateur d'Amazon Simple Storage Service, y compris les algorithmes pris en charge.

Vous avez la possibilité de choisir l'algorithme qui répond le mieux à vos besoins et de laisser le SDK calculer le checksum. Vous pouvez également fournir une valeur de somme de contrôle précalculée en utilisant l'un des algorithmes pris en charge.

> **Note**
>
> À partir de la version v1.74.1 du module Amazon S3, le SDK fournit des protections d'intégrité par défaut en calculant automatiquement une somme de `CRC32` contrôle pour les téléchargements. Le SDK calcule cette somme de contrôle si vous ne fournissez pas de valeur de somme de contrôle précalculée ou si vous ne spécifiez pas d'algorithme que le SDK doit utiliser pour calculer une somme de contrôle.

Le SDK fournit également des paramètres globaux pour les protections de l'intégrité des données que vous pouvez définir en externe, que vous pouvez consulter dans le Guide de référence AWS SDKs et sur les outils.

Nous discutons des sommes de contrôle en deux phases de demande : le téléchargement d'un objet et le téléchargement d'un objet.

Charger un objet

Lorsque vous téléchargez un objet avec la `putObject` méthode et que vous fournissez un algorithme de somme de contrôle, le SDK calcule la somme de contrôle pour l'algorithme spécifié.

L'extrait de code suivant montre une demande de téléchargement d'un objet avec une `CRC32` somme de contrôle. Lorsque le SDK envoie la demande, il calcule le `CRC32` checksum et télécharge l'objet. Amazon S3 valide l'intégrité du contenu en calculant le checksum et en le comparant au checksum fourni par le SDK. Amazon S3 enregistre ensuite le checksum avec l'objet.

```
out, err := s3Client.PutObject(context.Background(), &s3.PutObjectInput{
     Bucket:            aws.String("bucket"),
     Key:               aws.String("key"),
     ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
     Body:              strings.NewReader("Hello World"),
 })
```

Si vous ne fournissez pas d'algorithme de somme de contrôle avec la demande, le comportement de somme de contrôle varie en fonction de la version du SDK que vous utilisez, comme indiqué dans le tableau suivant.

Comportement de somme de contrôle lorsqu'aucun algorithme de somme de contrôle n'est fourni

Version du module Amazon S3 de AWS SDK pour Go	Comportement de Checksum
Antérieur à la v1.74.1	Le SDK ne calcule pas automatiquement une somme de contrôle basée sur le CRC et ne la fournit pas dans la demande.
v1.74.1 ou version ultérieure	Le SDK utilise l'`CRC32`algorithme pour calculer le checksum et le fournit dans la demande.

Version du module Amazon S3 de AWS SDK pour Go	Comportement de Checksum
	Amazon S3 valide l'intégrité du transfert en calculant sa propre somme de `CRC32` contrôle et en la comparant à la somme de contrôle fournie par le SDK. Si les sommes de contrôle correspondent, la somme de contrôle est enregistrée avec l'objet.

Utiliser une valeur de somme de contrôle précalculée

Une valeur de somme de contrôle précalculée fournie avec la demande désactive le calcul automatique par le SDK et utilise la valeur fournie à la place.

L'exemple suivant montre une demande avec une somme de SHA256 contrôle précalculée.

```
out, err := s3Client.PutObject(context.Background(), &s3.PutObjectInput{
     Bucket:        aws.String("bucket"),
     Key:           aws.String("key"),
     ChecksumCRC32: aws.String("checksumvalue"),
     Body:          strings.NewReader("Hello World"),
 })
```

Si Amazon S3 détermine que la valeur de la somme de contrôle est incorrecte pour l'algorithme spécifié, le service renvoie une réponse d'erreur.

Chargements partitionnés

Vous pouvez également utiliser des checksums pour les téléchargements partitionnés.

AWS SDK pour Go Il propose deux options pour utiliser les checksums lors de téléchargements partitionnés. La première option utilise le gestionnaire de transfert qui spécifie l'`CRC32`algorithme pour le téléchargement.

```
s3Client := s3.NewFromConfig(cfg)
     transferManager := manager.NewUploader(s3Client)
     out, err := transferManager.Upload(context.Background(), &s3.PutObjectInput{
             Bucket:            aws.String("bucket"),
```

```
            Key:               aws.String("key"),
            Body:              large file to trigger multipart upload,
            ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
    })
```

Si vous ne fournissez pas d'algorithme de somme de contrôle lorsque vous utilisez le gestionnaire de transfert pour les téléchargements, le SDK calcule automatiquement la somme de contrôle en fonction de cet algorithme. `CRC32` Le SDK effectue ce calcul pour toutes les versions du SDK.

La deuxième option utilise le client Amazon S3 pour effectuer le téléchargement partitionné. Si vous spécifiez une somme de contrôle avec cette approche, vous devez spécifier l'algorithme à utiliser lors du lancement du téléchargement. Vous devez également spécifier l'algorithme pour chaque demande d'article et fournir la somme de contrôle calculée pour chaque article après son chargement.

```
s3Client := s3.NewFromConfig(cfg)
    createMultipartUploadOutput, err :=
 s3Client.CreateMultipartUpload(context.Background(), &s3.CreateMultipartUploadInput{
            Bucket:            aws.String("bucket"),
            Key:               aws.String("key"),
            ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
         })
    if err != nil {
            log.Fatal("err create multipart upload ", err)
    }

    var partsBody []io.Reader // this is just an example parts content, you should
 load your target file in your code
    partNum := int32(1)
    var completedParts []types.CompletedPart
    for _, body := range partsBody {
        uploadPartOutput, err := s3Client.UploadPart(context.Background(),
 &s3.UploadPartInput{
            Bucket:            aws.String("bucket"),
            Key:               aws.String("key"),
            ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
            Body:              body,
            PartNumber:        aws.Int32(partNum),
            UploadId:          createMultipartUploadOutput.UploadId,
        })
        if err != nil {
            log.Fatal("err upload part ", err)
        }
```

```
        completedParts = append(completedParts, types.CompletedPart{
            PartNumber:    aws.Int32(partNum),
            ETag:          uploadPartOutput.ETag,
            ChecksumCRC32: uploadPartOutput.ChecksumCRC32,
        })
        partNum++
    }

    completeMultipartUploadOutput, err :=
s3Client.CompleteMultipartUpload(context.Background(),
&s3.CompleteMultipartUploadInput{
        Bucket:   aws.String("bucket"),
        Key:      aws.String("key"),
        UploadId: createMultipartUploadOutput.UploadId,
        MultipartUpload: &types.CompletedMultipartUpload{
            Parts: completedParts,
        },
    })
    if err != nil {
        log.Fatal("err complete multipart upload ", err)
    }
```

Télécharger un objet

Lorsque vous utilisez GetObjectcette méthode pour télécharger un objet, le SDK valide automatiquement le checksum lorsque le `ChecksumMode` champ de `GetObjectInput` est défini sur. `types.ChecksumModeEnabled`

La demande contenue dans l'extrait suivant demande au SDK de valider la somme de contrôle dans la réponse en calculant la somme de contrôle et en comparant les valeurs.

```
out, err := s3Client.GetObject(context.Background(), &s3.GetObjectInput{
    Bucket:       aws.String("bucket"),
    Key:          aws.String("key"),
    ChecksumMode: types.ChecksumModeEnabled,
 })
```

Si l'objet n'a pas été chargé avec une somme de contrôle, aucune validation n'a lieu.

Utilisation des AWS SDK pour Go utilitaires

AWS SDK pour Go Il inclut les utilitaires suivants pour vous aider à utiliser plus facilement AWS les services. Trouvez les utilitaires du SDK dans le package de AWS services correspondant.

Utilitaires Amazon RDS

Authentification IAM

Le package auth fournit des utilitaires permettant de générer des jetons d'authentification pour la connexion aux instances de base de données Amazon RDS MySQL et PostgreSQL. À l'aide de BuildAuthTokencette méthode, vous générez un jeton d'autorisation de base de données en fournissant le point de terminaison de la base de données, AWS la région, le nom d'utilisateur et un aws. CredentialProviderimplémentation qui renvoie des informations d'identification IAM avec l'autorisation de se connecter à la base de données à l'aide de l'authentification de base de données IAM. Pour en savoir plus sur la configuration d'Amazon RDS avec l'authentification IAM, consultez les ressources suivantes du guide du développeur Amazon RDS :

- Activation et désactivation de l'authentification de base de données IAM
- Création et utilisation d'une politique IAM pour l'accès à la base de données IAM
- Création d'un compte de base de données à l'aide de l'authentification IAM

L'exemple suivant montre comment générer un jeton d'authentification pour se connecter à une base de données Amazon RDS :

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/feature/rds/auth"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    panic("configuration error: " + err.Error())
}

authenticationToken, err := auth.BuildAuthToken(
```

```
    context.TODO(),
    "mydb.123456789012.us-east-1.rds.amazonaws.com:3306", // Database Endpoint (With
 Port)
    "us-east-1", // AWS Region
    "jane_doe", // Database Account
    cfg.Credentials,
)
if err != nil {
    panic("failed to create authentication token: " + err.Error())
}
```

Amazon CloudFront Utilities

Signataire CloudFront d'URL Amazon

Le signataire d' CloudFront URL Amazon simplifie le processus de création de signatures URLs. Une URL signée inclut des informations, telles que la date et l'heure d'expiration, qui vous permettent de contrôler l'accès à votre contenu. URLs Les signatures sont utiles lorsque vous souhaitez distribuer du contenu via Internet, mais que vous souhaitez restreindre l'accès à certains utilisateurs (par exemple, aux utilisateurs qui ont payé des frais).

Pour signer une URL, créez une `URLSigner` instance avec votre identifiant de paire de CloudFront clés et la clé privée associée. Appelez ensuite la `SignWithPolicy` méthode `Sign` or et incluez l'URL à signer. Pour plus d'informations sur les paires de CloudFront clés Amazon, consultez la section Création de paires de CloudFront clés pour vos signataires de confiance dans le guide du CloudFront développeur.

L'exemple suivant crée une URL signée valide pendant une heure après sa création.

```
import "github.com/aws/aws-sdk-go-v2/feature/cloudfront/sign"

// ...

signer := sign.NewURLSigner(keyID, privKey)

signedURL, err := signer.Sign(rawURL, time.Now().Add(1*time.Hour))
if err != nil {
    log.Fatalf("Failed to sign url, err: %s\n", err.Error())
    return
}
```

Pour plus d'informations sur l'utilitaire de signature, consultez le package de signature dans le manuel de référence des AWS SDK pour Go API.

Service de métadonnées d' EC2 instance Amazon

Vous pouvez utiliser le AWS SDK pour Go pour accéder au service de métadonnées d' EC2instance Amazon. Le package feature/ec2/imdsGo fournit un type de client qui peut être utilisé pour accéder au service de métadonnées d' EC2 instance Amazon. Les opérations `Client` et les opérations associées peuvent être utilisées de la même manière que les autres clients de AWS service fournis par le SDK. Pour en savoir plus sur la configuration du SDK et l'utilisation des clients de service, consultez Configuration du kit SDK etUtiliser la AWS SDK pour Go v2 avec les AWS services.

Le client peut vous aider à récupérer facilement des informations sur les instances sur lesquelles vos applications s'exécutent, telles que sa AWS région ou son adresse IP locale. En général, vous devez créer et envoyer des requêtes HTTP pour récupérer les métadonnées de l'instance. Créez plutôt un `imds.Client` pour accéder au service de métadonnées d' EC2 instance Amazon à l'aide d'un client programmatique comme les autres AWS services.

Par exemple, pour créer un client :

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/feature/ec2/imds"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Printf("error: %v", err)
    return
}

client := imds.NewFromConfig(cfg)
```

Utilisez ensuite le client de service pour récupérer des informations à partir d'une catégorie de métadonnées telle que `local-ipv4` (l'adresse IP privée de l'instance).

```
localIp, err := client.GetMetadata(context.TODO(), &imds.GetMetadataInput{
    Path: "local-ipv4",
})
if err != nil {
```

```
    log.Printf("Unable to retrieve the private IP address from the EC2 instance: %s\n",
 err)
    return
}
content, _ := io.ReadAll(localIp.Content)
fmt.Printf("local-ip: %v\n", string(content))
```

Pour obtenir la liste de toutes les catégories de métadonnées, consultez la section Catégories de métadonnées d'instance dans le guide de EC2 l'utilisateur Amazon.

Utilitaires Amazon S3

Gestionnaires de transfert Amazon S3

Les gestionnaires de chargement et de téléchargement d'Amazon S3 peuvent diviser des objets volumineux afin qu'ils puissent être transférés en plusieurs parties, en parallèle. Cela permet de reprendre facilement les transferts interrompus.

Gestionnaire de téléchargement Amazon S3

Le gestionnaire de téléchargement Amazon S3 détermine si un fichier peut être divisé en parties plus petites et chargé en parallèle. Vous pouvez personnaliser le nombre de téléchargements parallèles et la taille des parties téléchargées.

L'exemple suivant utilise Amazon S3 `Uploader` pour charger un fichier. L'utilisation `Uploader` est similaire à l'`s3.PutObject()`opération.

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/feature/s3/manager"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Printf("error: %v", err)
    return
}

client := s3.NewFromConfig(cfg)
```

```
uploader := manager.NewUploader(client)
result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-object-key"),
    Body:   uploadFile,
})
```

Options de configuration

Lorsque vous instanciez une `Uploader` instance à l'aide de NewUploader, vous pouvez spécifier plusieurs options de configuration pour personnaliser le mode de chargement des objets. Les options sont remplacées en fournissant un ou plusieurs arguments à. `NewUploader` Ces options sont les suivantes :

- `PartSize`— Spécifie la taille de la mémoire tampon, en octets, de chaque partie à télécharger. La taille minimale par pièce est de 5 MiB.
- `Concurrency`— Spécifie le nombre de pièces à télécharger en parallèle.
- `LeavePartsOnError`— Indique s'il faut laisser les parties chargées avec succès dans Amazon S3.

La `Concurrency` valeur limite le nombre simultané de téléchargements partiels pouvant avoir lieu pour un `Upload` appel donné. Il ne s'agit pas d'une limite globale de simultanéité des clients. Modifiez les valeurs de `Concurrency` configuration `PartSize` et pour trouver la configuration optimale. Par exemple, les systèmes dotés de connexions à haut débit peuvent envoyer de plus grandes parties et un plus grand nombre de téléchargements en parallèle.

Par exemple, votre application est configurée `Uploader` avec un paramètre `Concurrency` de5. Si votre application appelle ensuite `Upload` depuis deux goroutines différentes, il en résulte des téléchargements partiels `10` simultanés (2 goroutines* 5). `Concurrency`

> **Warning**
>
> Votre application est censée limiter les appels simultanés afin d'`Upload`éviter l'épuisement des ressources de l'application.

Voici un exemple de définition de la taille de pièce par défaut lors de `Uploader` la création :

```
uploader := manager.NewUploader(client, func(u *Uploader) {
```

```
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
})
```

Pour plus d'informations sur `Uploader` ses configurations, consultez Uploader dans la référence de l'AWS SDK pour Go API.

PutObjectInput Body Field (io. ReadSeeker par rapport à io.Reader)

Le `Body` champ de la `s3.PutObjectInput` structure est un `io.Reader` type. Toutefois, ce champ peut être rempli avec un type satisfaisant à la fois à l'`io.ReaderAt`interface `io.ReadSeeker` et afin d'améliorer l'utilisation des ressources applicatives de l'environnement hôte. L'exemple suivant crée le type `ReadSeekerAt` qui satisfait les deux interfaces :

```
type ReadSeekerAt interface {
    io.ReadSeeker
    io.ReaderAt
}
```

Pour les `io.Reader` types, les octets du lecteur doivent être mis en mémoire tampon avant que la partie puisse être téléchargée. Lorsque vous augmentez la `Concurrency` valeur `PartSize` ou, la mémoire (RAM) requise pour cette opération `Uploader` augmente de manière significative. La mémoire requise est d'*`PartSize`*environ* *`Concurrency`*. Par exemple, la spécification de 100 Mo pour `PartSize` et 10 pour `Concurrency` nécessite au moins 1 Go.

Comme un `io.Reader` type ne peut pas déterminer sa taille avant de lire ses octets, il `Uploader` ne peut pas calculer le nombre de parties qui seront téléchargées. Par conséquent, `Uploader` vous pouvez atteindre la limite de téléchargement Amazon S3 de 10 000 parties pour les fichiers volumineux si vous la définissez `PartSize` trop faible. Si vous essayez de télécharger plus de 10 000 pièces, le téléchargement s'arrête et renvoie un message d'erreur.

Pour body les valeurs qui implémentent le `ReadSeekerAt` type, le contenu du corps `Uploader` n'est pas mis en mémoire tampon avant de l'envoyer à Amazon S3. `Uploader`calcule le nombre de pièces attendu avant de télécharger le fichier sur Amazon S3. Si la valeur actuelle de `PartSize` nécessite plus de 10 000 pièces pour télécharger le fichier, `Uploader` augmente la valeur de taille des pièces afin de réduire le nombre de pièces nécessaires.

Gestion des échecs de téléchargement

Si un chargement sur Amazon S3 échoue, `Uploader` utilise par défaut l'`AbortMultipartUpload`opération Amazon S3 pour supprimer les parties téléchargées. Cette

fonctionnalité garantit que les téléchargements échoués ne consomment pas le stockage Amazon S3.

Vous pouvez définir le `LeavePartsOnError` paramètre sur true afin que les parties téléchargées `Uploader` ne soient pas supprimées avec succès. Cela est utile pour reprendre des téléchargements partiellement terminés. Pour opérer sur les pièces téléchargées, vous devez obtenir le code `UploadID` de l'échec du téléchargement. L'exemple suivant montre comment utiliser le type `manager.MultiUploadFailure` d'interface d'erreur pour obtenir le`UploadID`.

```
result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-object-key"),
    Body:   uploadFile,
})
output, err := u.upload(input)
if err != nil {
    var mu manager.MultiUploadFailure
    if errors.As(err, &mu) {
        // Process error and its associated uploadID
        fmt.Println("Error:", mu)
        _ = mu.UploadID() // retrieve the associated UploadID
    } else {
        // Process error generically
        fmt.Println("Error:", err.Error())
    }
    return
}
```

Remplacer les options de téléchargement par téléchargement

Vous pouvez remplacer les `Uploader` options lors de l'appel `Upload` en fournissant un ou plusieurs arguments à la méthode. Ces dérogations sont des modifications sûres pour la simultanéité et n'affectent pas les téléchargements en cours, ni les appels ultérieurs au responsable. `Upload` Par exemple, pour remplacer la `PartSize` configuration d'une demande de téléchargement spécifique :

```
params := &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-key"),
    Body:   myBody,
}
resp, err := uploader.Upload(context.TODO(), params, func(u *manager.Uploader) {
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
```

```
})
```

Exemples

Charger un dossier sur Amazon S3

L'exemple suivant utilise le `path/filepath` package pour rassembler de manière récursive une liste de fichiers et les télécharger dans le compartiment Amazon S3 spécifié. Les clés des objets Amazon S3 sont préfixées par le chemin relatif du fichier.

```
package main

import (
    "context"
    "log"
    "os"
    "path/filepath"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

var (
    localPath string
    bucket    string
    prefix    string
)

func init() {
    if len(os.Args) != 4 {
        log.Fatalln("Usage:", os.Args[0], "<local path> <bucket> <prefix>")
    }
    localPath = os.Args[1]
    bucket = os.Args[2]
    prefix = os.Args[3]
}

func main() {
    walker := make(fileWalk)
    go func() {
        // Gather the files to upload by walking the path recursively
```

```
        if err := filepath.Walk(localPath, walker.Walk); err != nil {
            log.Fatalln("Walk failed:", err)
        }
        close(walker)
    }()

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatalln("error:", err)
    }

    // For each file found walking, upload it to Amazon S3
    uploader := manager.NewUploader(s3.NewFromConfig(cfg))
    for path := range walker {
        rel, err := filepath.Rel(localPath, path)
        if err != nil {
            log.Fatalln("Unable to get relative path:", path, err)
        }
        file, err := os.Open(path)
        if err != nil {
            log.Println("Failed opening file", path, err)
            continue
        }
        defer file.Close()
        result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
            Bucket: &bucket,
            Key:    aws.String(filepath.Join(prefix, rel)),
            Body:   file,
        })
        if err != nil {
            log.Fatalln("Failed to upload", path, err)
        }
        log.Println("Uploaded", path, result.Location)
    }
}

type fileWalk chan string

func (f fileWalk) Walk(path string, info os.FileInfo, err error) error {
    if err != nil {
        return err
    }
    if !info.IsDir() {
        f <- path
```

```
    }
    return nil
}
```

Gestionnaire de téléchargement

Le gestionnaire Amazon S3 Downloader détermine si un fichier peut être divisé en parties plus petites et téléchargé en parallèle. Vous pouvez personnaliser le nombre de téléchargements parallèles et la taille des parties téléchargées.

Exemple : téléchargement d'un fichier

L'exemple suivant utilise Amazon S3 `Downloader` pour télécharger un fichier. L'utilisation `Downloader` est similaire à celle du s3. GetObjectopération.

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/feature/s3/manager"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Println("error:", err)
    return
}

client := s3.NewFromConfig(cfg)

downloader := manager.NewDownloader(client)
numBytes, err := downloader.Download(context.TODO(), downloadFile, &s3.GetObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-key"),
})
```

Le `downloadFile` paramètre est un `io.WriterAt` type. L'`WriterAt`interface permet `Downloader` d'écrire plusieurs parties du fichier en parallèle.

Options de configuration

Lorsque vous instanciez une `Downloader` instance, vous pouvez spécifier des options de configuration pour personnaliser le mode de téléchargement des objets :

- `PartSize`— Spécifie la taille de la mémoire tampon, en octets, de chaque partie à télécharger. La taille minimale par pièce est de 5 Mo.
- `Concurrency`— Spécifie le nombre de pièces à télécharger en parallèle.

La `Concurrency` valeur limite le nombre de téléchargements partiels simultanés qui peuvent avoir lieu pour un `Download` appel donné. Il ne s'agit pas d'une limite globale de simultanéité des clients. Modifiez les valeurs de `Concurrency` configuration `PartSize` et pour trouver la configuration optimale. Par exemple, les systèmes dotés de connexions à haut débit peuvent recevoir des pièces plus volumineuses et un plus grand nombre de téléchargements en parallèle.

Par exemple, votre application est configurée `Downloader` avec un `Concurrency` de5. Votre application appelle ensuite `Download` depuis deux goroutines différentes, ce qui se traduira par des téléchargements partiels `10` simultanés (2 goroutines* 5). `Concurrency`

> **Warning**
>
> Votre application est censée limiter les appels simultanés afin d'`Download`éviter l'épuisement des ressources de l'application.

Pour plus d'informations sur les autres options de configuration `Downloader` et sur ses autres options de configuration, consultez Manager.Downloader dans la référence de l' AWS SDK pour Go API.

Remplacer les options du téléchargeur par téléchargement

Vous pouvez remplacer les `Downloader` options lors de l'appel `Download` en fournissant un ou plusieurs arguments fonctionnels à la méthode. Ces dérogations sont des modifications sûres en matière de simultanéité et n'affectent pas les téléchargements en cours, ni les `Download` appels ultérieurs au responsable. Par exemple, pour remplacer la `PartSize` configuration d'une demande de téléchargement spécifique :

```
params := &s3.GetObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
```

```
    Key:    aws.String("my-key"),
}
resp, err := downloader.Download(context.TODO(), targetWriter, params, func(u
 *manager.Downloader) {
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
})
```

Exemples

Télécharger tous les objets d'un bucket

L'exemple suivant utilise la pagination pour rassembler une liste d'objets à partir d'un compartiment Amazon S3. Il télécharge ensuite chaque objet dans un fichier local.

```
package main

import (
    "context"
    "fmt"
    "log"
    "os"
    "path/filepath"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

var (
    Bucket         = "amzn-s3-demo-bucket" // Download from this bucket
    Prefix         = "logs/"    // Using this key prefix
    LocalDirectory = "s3logs"   // Into this directory
)

func main() {
    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatalln("error:", err)
    }

    client := s3.NewFromConfig(cfg)
    manager := manager.NewDownloader(client)
```

```
    paginator := s3.NewListObjectsV2Paginator(client, &s3.ListObjectsV2Input{
        Bucket: &Bucket,
        Prefix: &Prefix,
    })

    for paginator.HasMorePages() {
        page, err := paginator.NextPage(context.TODO())
        if err != nil {
            log.Fatalln("error:", err)
        }
        for _, obj := range page.Contents {
            if err := downloadToFile(manager, LocalDirectory, Bucket,
 aws.ToString(obj.Key)); err != nil {
                log.Fatalln("error:", err)
            }
        }
    }
}

func downloadToFile(downloader *manager.Downloader, targetDirectory, bucket, key
 string) error {
    // Create the directories in the path
    file := filepath.Join(targetDirectory, key)
    if err := os.MkdirAll(filepath.Dir(file), 0775); err != nil {
        return err
    }

    // Set up the local file
    fd, err := os.Create(file)
    if err != nil {
        return err
    }
    defer fd.Close()

    // Download the file using the AWS SDK for Go
    fmt.Printf("Downloading s3://%s/%s to %s...\n", bucket, key, file)
    _, err = downloader.Download(context.TODO(), fd, &s3.GetObjectInput{Bucket:
 &bucket, Key: &key})

    return err
}
```

GetBucketRegion

GetBucketRegionest une fonction utilitaire permettant de déterminer l'emplacement AWS régional d'un compartiment Amazon S3. `GetBucketRegion`prend un client Amazon S3 et l'utilise pour déterminer l'emplacement du compartiment demandé dans la AWS partition associée à la région configurée du client.

Par exemple, pour trouver la région du compartiment *`amzn-s3-demo-bucket`* :

```
cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Println("error:", err)
    return
}

bucket := "amzn-s3-demo-bucket"
region, err := manager.GetBucketRegion(ctx, s3.NewFromConfig(cfg), bucket)
if err != nil {
    var bnf manager.BucketNotFound
    if errors.As(err, &bnf) {
        log.Printf("unable to find bucket %s's Region\n", bucket)
    } else {
        log.Println("error:", err)
    }
    return
}
fmt.Printf("Bucket %s is in %s region\n", bucket, region)
```

Si elle n'`GetBucketRegion`est pas en mesure de déterminer l'emplacement d'un bucket, la fonction renvoie un type BucketNotFoundd'erreur, comme indiqué dans l'exemple.

Entrée de streaming invisible

Pour les opérations d'API telles que `PutObject` et`UploadPart`, le client Amazon S3 s'attend à ce que la valeur du paramètre `Body` d'entrée implémente l'interface io.Seeker par défaut. L'`io.Seeker`interface est utilisée par le client pour déterminer la longueur de la valeur à télécharger et pour calculer le hachage de la charge utile pour la signature de la demande. Si la valeur du paramètre `Body` d'entrée n'est pas `io.Seeker` implémentée, votre application recevra un message d'erreur.

```
operation error S3: PutObject, failed to compute payload hash: failed to seek
```

```
body to start, request stream is not seekable
```

Vous pouvez modifier ce comportement en modifiant la méthode d'opération à l'Intergicielaide d'options fonctionnelles. L'APIOptionsassistant With renvoie une option fonctionnelle pour zéro ou plusieurs mutateurs intergiciels. Pour désactiver le calcul du hachage de la charge utile par le client et utiliser la signature de demande de charge utile non signée, ajoutez v4.SwapComputePayloadSHA256ForUnsignedPayloadMiddleware.

```
resp, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
    Bucket: &bucketName,
    Key: &objectName,
    Body: bytes.NewBuffer([]byte(`example object!`)),
    ContentLength: 15, // length of body
}, s3.WithAPIOptions(
    v4.SwapComputePayloadSHA256ForUnsignedPayloadMiddleware,
))
```

> **Warning**
>
> Amazon S3 exige que la longueur du contenu soit fournie pour tous les objets chargés dans un compartiment. Comme le paramètre `Body` d'entrée n'`io.Seeker`implémente pas l'interface, le client ne pourra pas calculer le `ContentLength` paramètre de la demande. Le paramètre doit être fourni par l'application. La demande échouera si le `ContentLength` paramètre n'est pas fourni.
>
> Utilisez le SDK Gestionnaire de téléchargement Amazon S3 pour les téléchargements qui ne sont pas consultables et dont la durée n'est pas connue.

Personnalisation des demandes du client AWS SDK pour Go v2 avec un intergiciel

> **Warning**
>
> La modification du pipeline de demandes du client peut entraîner des demandes malformées/non valides ou des erreurs d'application inattendues. Cette fonctionnalité est destinée aux cas d'utilisation avancés qui ne sont pas fournis par défaut par l'interface du SDK.

Vous pouvez personnaliser les demandes des AWS SDK pour Go clients en enregistrant un ou plusieurs intergiciels dans la pile d'une opération de service. La pile est composée d'une série d'étapes : Initialiser, Sérialiser, Construire, Finaliser et Désérialiser. Chaque étape contient zéro ou plusieurs intergiciels qui opèrent sur les types d'entrée et de sortie de cette étape. Le schéma et le tableau suivants fournissent une vue d'ensemble de la manière dont la demande et la réponse d'une opération traversent la pile.

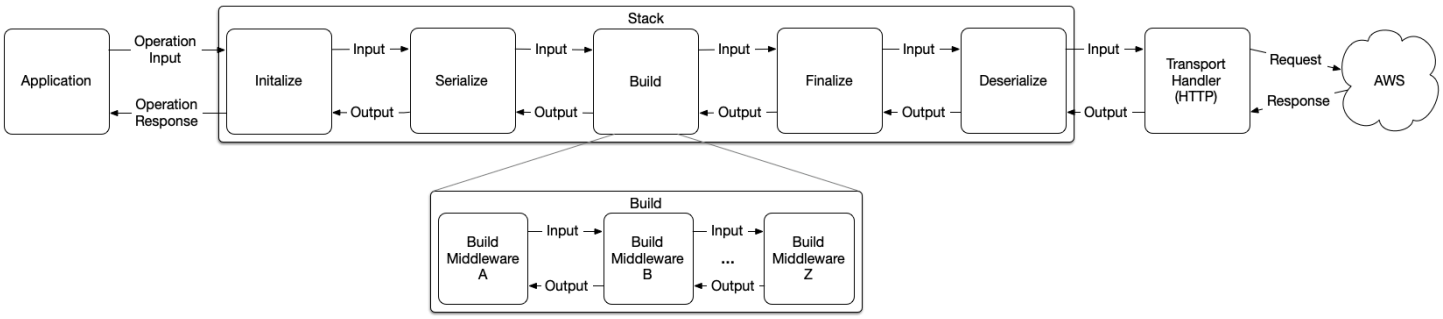

Étape d'empilage	Description
Initialiser	Prépare l'entrée et définit les paramètres par défaut selon les besoins.
Sérialiser	Sérialise l'entrée dans un format de protocole adapté à la couche de transport cible.
Génération	Attachez des métadonnées supplémentaires à l'entrée sérialisée, telles que HTTP Content-L ength.

Étape d'empilage	Description
Finaliser	Préparation finale du message, y compris les nouvelles tentatives et l'authentification (signature SigV4).
Désérialiser	Désérialisez les réponses du format du protocole en un type structuré ou une erreur.

Chaque intergiciel d'une étape donnée doit avoir un identifiant unique, qui est déterminé par la méthode du middleware. `ID` Les identifiants de middleware garantissent qu'une seule instance d'un intergiciel donné est enregistrée dans une étape et permettent d'insérer un autre intergiciel d'étape par rapport à celle-ci.

Vous attachez un intergiciel d'étapes à l'aide d'une étape `Insert` ou `Add` d'une méthode. Vous pouvez associer `Add` un intergiciel au début d'une étape en spécifiant Middleware.Before comme étant le RelativePosition, et Middleware.After comme étant attaché à la fin de l'étape. Vous pouvez associer un intergiciel `Insert` à une étape en insérant le middleware par rapport à un autre intergiciel d'étape.

> **Warning**
>
> Vous devez utiliser `Add` cette méthode pour insérer en toute sécurité un intergiciel d'étapes personnalisé. L'utilisation `Insert` crée une dépendance entre votre intergiciel personnalisé et le middleware que vous insérez par rapport à celui-ci. Le middleware intégré à une étape de pile doit être considéré comme opaque pour éviter d'interrompre les modifications apportées à votre application.

Rédaction d'un intergiciel personnalisé

Chaque étape de la pile possède une interface que vous devez satisfaire pour associer un intergiciel à une étape donnée. Vous pouvez utiliser l'une des *`Step`*`MiddlewareFunc` fonctions fournies pour satisfaire rapidement cette interface. Le tableau suivant décrit les étapes, leur interface et la fonction d'assistance qui peut être utilisée pour satisfaire l'interface.

Étape	utilisateur	Fonction Helper
Initialiser	InitializeMiddleware	InitializeMiddlewareFunc
Génération	BuildMiddleware	BuildMiddlewareFunc
Sérialiser	SerializeMiddleware	SerializeMiddlewareFunc
Finaliser	FinalizeMiddleware	FinalizeMiddlewareFunc
Désérialiser	DeserializeMiddleware	DeserializeMiddlewareFunc

Les exemples suivants montrent comment écrire un intergiciel personnalisé pour renseigner le membre Bucket des appels d'`GetObject`API Amazon S3 s'il n'en est pas fourni. Ce middleware sera référencé dans les exemples suivants pour montrer comment attacher un intergiciel par étapes à la pile.

```
import "github.com/aws/smithy-go/aws"
import "github.com/aws/smithy-go/middleware"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

var defaultBucket = middleware.InitializeMiddlewareFunc("DefaultBucket", func(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    // Type switch to check if the input is s3.GetObjectInput, if so and the bucket is
 not set, populate it with
    // our default.
    switch v := in.Parameters.(type) {
    case *s3.GetObjectInput:
        if v.Bucket == nil {
            v.Bucket = aws.String("amzn-s3-demo-bucket")
        }
    }

    // Middleware must call the next middleware to be executed in order to continue
 execution of the stack.
```

```
    // If an error occurs, you can return to prevent further execution.
    return next.HandleInitialize(ctx, in)
})
```

Associer un intergiciel à tous les clients

Vous pouvez associer votre intergiciel Step personnalisé à chaque client en ajoutant le middleware à l'aide du `APIOptions` membre du type AWS.config. Les exemples suivants associent le `defaultBucket` middleware à chaque client créé à l'aide de votre objet d'applications `aws.Config` :

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

cfg.APIOptions = append(cfg.APIOptions, func(stack *middleware.Stack) error {
    // Attach the custom middleware to the beginning of the Initialize step
    return stack.Initialize.Add(defaultBucket, middleware.Before)
})

client := s3.NewFromConfig(cfg)
```

Associer un intergiciel à une opération spécifique

Vous pouvez associer votre intergiciel d'étapes personnalisé à une opération client spécifique en modifiant le `APIOptions` membre du client à l'aide de la liste d'arguments variadiques d'une opération. Les exemples suivants associent le `defaultBucket` middleware à une invocation d'`GetObject`opération Amazon S3 spécifique :

```
import "context"
```

```
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...

// registerDefaultBucketMiddleware registers the defaultBucket middleware with the
 provided stack.
func registerDefaultBucketMiddleware(stack *middleware.Stack) error {
    // Attach the custom middleware to the beginning of the Initialize step
    return stack.Initialize.Add(defaultBucket, middleware.Before)
}

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg)

object, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    Key: aws.String("my-key"),
}, func(options *s3.Options) {
    // Register the defaultBucketMiddleware for this operation only
    options.APIOptions = append(options.APIOptions, registerDefaultBucketMiddleware)
})
```

Transmission des métadonnées vers le bas

Dans certaines situations, il se peut que vous ayez besoin de deux intergiciels ou plus pour fonctionner en tandem en partageant des informations ou des états. Vous pouvez utiliser Context.context pour transmettre ces métadonnées à l'aide d'un intergiciel. WithStackValue. `middleware.WithStackValue`attache la paire clé-valeur donnée au contexte fourni et limite en toute sécurité la portée à la pile en cours d'exécution. Ces valeurs empilées peuvent être extraites d'un contexte à l'aide d'un intergiciel. GetStackValueet en fournissant la clé utilisée pour stocker la valeur correspondante. Les clés doivent être comparables et vous devez définir vos propres types en tant que clés de contexte pour éviter les collisions. Les exemples suivants montrent comment deux intergiciels peuvent être utilisés `context.Context` pour transmettre des informations dans la pile.

```
import "context"
import "github.com/aws/smithy-go/middleware"

// ...

type customKey struct {}

func GetCustomKey(ctx context.Context) (v string) {
    v, _ = middleware.GetStackValue(ctx, customKey{}).(string)
    return v
}

func SetCustomKey(ctx context.Context, value string) context.Context {
    return middleware.WithStackValue(ctx, customKey{}, value)
}

// ...

var customInitalize = middleware.InitializeMiddlewareFunc("customInitialize", func(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    ctx = SetCustomKey(ctx, "my-custom-value")

    return next.HandleInitialize(ctx, in)
})

var customBuild = middleware.BuildMiddlewareFunc("customBuild", func(
    ctx context.Context, in middleware.BuildInput, next middleware.BuildHandler,
) (
    out middleware.BuildOutput, metadata middleware.Metadata, err error,
) {
    customValue := GetCustomKey(ctx)

    // use customValue

    return next.HandleBuild(ctx, in)
})
```

Métadonnées fournies par le SDK

AWS SDK pour Go fournit plusieurs valeurs de métadonnées qui peuvent être récupérées à partir du contexte fourni. Ces valeurs peuvent être utilisées pour activer un intergiciel plus dynamique qui modifie son comportement en fonction du service d'exécution, de l'opération ou de la région cible. Quelques-unes des clés disponibles sont indiquées dans le tableau ci-dessous :

Clé	Retriever	Description
ID du service	GetServiceID	Récupérez l'identifiant de service pour la pile en cours d'exécution. Cela peut être comparé à la `ServiceID` constante du package de service client.
OperationName	GetOperationName	Récupérez le nom de l'opération pour la pile en cours d'exécution.
Logger	GetLogger	Récupérez l'enregistreur qui peut être utilisé pour enregistrer les messages depuis le middleware.

Transmission des métadonnées vers le haut

Vous pouvez transmettre les métadonnées dans la pile en ajoutant des paires clé/valeur de métadonnées à l'aide du Middleware.Metadata. Chaque étape du middleware renvoie une structure de sortie, des métadonnées et une erreur. Votre intergiciel personnalisé doit renvoyer les métadonnées reçues lors de l'appel du gestionnaire suivant à l'étape. Cela garantit que les métadonnées ajoutées par le middleware en aval se propagent vers l'application invoquant l'opération de service. Les métadonnées résultantes sont accessibles à l'application invocatrice soit par la forme de sortie de l'opération, soit par le biais du membre de `ResultMetadata` structure.

Les exemples suivants montrent comment un intergiciel personnalisé peut ajouter des métadonnées renvoyées dans le cadre de la sortie de l'opération.

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...

type customKey struct{}

func GetCustomKey(metadata middleware.Metadata) (v string) {
    v, _ = metadata.Get(customKey{}).(string)
    return v
}

func SetCustomKey(metadata *middleware.Metadata, value string) {
    metadata.Set(customKey{}, value)
}

// ...

var customInitalize = middleware.InitializeMiddlewareFunc("customInitialize", func (
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    out, metadata, err = next.HandleInitialize(ctx, in)
    if err != nil {
        return out, metadata, err
    }

    SetCustomKey(&metadata, "my-custom-value")

    return out, metadata, nil
})

// ...

client := s3.NewFromConfig(cfg, func (options *s3.Options) {
    options.APIOptions = append(options.APIOptions, func(stack *middleware.Stack) error
 {
        return stack.Initialize.Add(customInitalize, middleware.After)
    })
})
```

```
out, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    // handle error
}

customValue := GetCustomKey(out.ResponseMetadata)
```

Questions fréquentes (FAQ)

Comment configurer le client HTTP de mon SDK ? Existe-t-il des directives ou des meilleures pratiques ?

Nous ne sommes pas en mesure de fournir des conseils aux clients sur la manière de configurer leur flux de travail HTTP de la manière la plus efficace pour leur charge de travail particulière. La réponse à cette question est le produit d'une équation multivariée, avec des facteurs d'entrée tels que, mais sans s'y limiter, les suivants :

- l'empreinte réseau de l'application (TPS, débit, etc.)
- les services utilisés
- les caractéristiques informatiques du déploiement
- la nature géographique du déploiement
- le comportement souhaité de l'application ou les besoins de l'application elle-même (horairesSLAs, etc.)

Comment configurer les délais d'expiration des opérations ?

Tout comme pour la question précédente, cela dépend. Les éléments à prendre en compte ici sont les suivants :

- Tous les facteurs ci-dessus concernant la configuration du client HTTP
- Vos propres contraintes en matière de calendrier de candidature ou de SLA (par exemple, si vous distribuez vous-même du trafic à d'autres consommateurs)

La réponse à cette question ne devrait presque JAMAIS être basée sur une simple observation empirique du comportement en amont. Par exemple, « J'ai effectué 1 000 appels pour cette opération, cela a pris au maximum 5 secondes. Je vais donc régler le délai d'attente en fonction de cela avec un facteur de sécurité de 2 à 10 secondes ». Les conditions environnementales peuvent changer, les services peuvent se dégrader temporairement, et ce type d'hypothèses peut devenir erroné sans avertissement.

Les demandes effectuées par le SDK arrivent à expiration ou prennent trop de temps, comment puis-je résoudre ce problème ?

Nous ne sommes pas en mesure de répondre aux appels opérationnels prolongés ou expirés en raison du temps passé sur le fil. Dans le SDK, le « temps de câblage » est défini comme suit :

- Temps passé dans la méthode d'un client `HTTPClient.Do()` SDK
- Temps passé en `Read()` s sur le corps d'une réponse HTTP qui a été transféré à l'appelant (par exemple`GetObject`)

Si vous rencontrez des problèmes liés à la latence des opérations ou à des délais impartis, la première chose à faire est d'obtenir des données télémétriques du cycle de vie des opérations du SDK afin de déterminer la répartition temporelle entre le temps passé sur le câble et le surcoût associé à l'opération. Consultez le guide sur le chronométrage des opérations du SDK, qui contient un extrait de code réutilisable permettant d'y parvenir.

Comment corriger une **`read: connection reset`** erreur ?

Le SDK essaie à nouveau de corriger les erreurs correspondant au `connection reset` modèle par défaut. Cela couvrira la gestion des erreurs pour la plupart des opérations, où la réponse HTTP de l'opération est entièrement consommée et désérialisée dans son type de résultat modélisé.

Cependant, cette erreur peut toujours se produire dans un contexte extérieur à la boucle de réessais : certaines opérations de service transmettent directement le corps de la réponse HTTP de l'API à l'appelant pour qu'il soit directement consommé par le fil `io.ReadCloser` (par exemple, la charge utile `GetObject` de l'objet). Vous pouvez rencontrer cette erreur lorsque vous effectuez un dans `Read` le corps de la réponse.

Cette erreur indique que votre hôte, le service ou tout intermédiaire (par exemple, les passerelles NAT, les proxys, les équilibreurs de charge) ont fermé la connexion alors qu'ils tentaient de lire la réponse.

Cela peut se produire pour plusieurs raisons :

- Vous n'avez pas utilisé le corps de la réponse pendant un certain temps après la réception de la réponse elle-même (après l'appel de l'opération de service). Nous vous recommandons de consommer le corps de la réponse HTTP dès que possible pour ce type d'opérations.

- Vous n'avez pas fermé un corps de réponse reçu précédemment. Cela peut entraîner des réinitialisations de connexion sur certaines plateformes. Vous DEVEZ fermer toutes **`io.ReadCloser`** les instances fournies dans la réponse d'une opération, que vous consommiez ou non son contenu.

En outre, essayez `tcpdump` d'exécuter une connexion affectée à la périphérie de votre réseau (par exemple, après tout proxy que vous contrôlez). Si vous constatez que le AWS point de terminaison semble envoyer un TCP RST, vous devez utiliser la console d' AWS assistance pour ouvrir un dossier contre le service incriminé. Soyez prêt à fournir une demande IDs et des horodatages précis indiquant le moment où le problème s'est produit.

Pourquoi est-ce que je reçois des erreurs de « signature non valide » lorsque j'utilise un proxy HTTP avec le SDK ?

L'algorithme de signature des AWS services (généralement sigv4) est lié aux en-têtes de la demande sérialisée, plus précisément à la plupart des en-têtes préfixés par. `X-` Les proxys ont tendance à modifier la demande sortante en ajoutant des informations de transfert supplémentaires (souvent via un `X-Forwarded-For` en-tête), ce qui brise effectivement la signature calculée par le SDK.

Si vous utilisez un proxy HTTP et que vous rencontrez des erreurs de signature, vous devez vous efforcer de capturer la demande telle qu'elle semble sortante du proxy et de déterminer si elle est différente.

Synchronisation des opérations du SDK

Lorsque vous corrigez des problèmes de temporisation ou de latence dans le SDK, il est essentiel d'identifier les composants du cycle de vie des opérations dont l'exécution prend plus de temps que prévu. Comme point de départ, vous devrez généralement inspecter la répartition temporelle entre l'appel d'opération global et l'appel HTTP lui-même.

L'exemple de programme suivant implémente une sonde d'instrumentation de base en termes de `smithy-go` middleware pour les clients SQS et montre comment elle est utilisée. La sonde émet les informations suivantes pour chaque appel d'opération :

- AWS ID de demande
- ID de service
- nom de l'opération

- heure d'invocation de l'opération
- durée de l'appel HTTP

Chaque message émis est préfixé par un « ID d'invocation » unique (pour une seule opération) qui est défini au début de la pile de gestionnaires.

Le point d'entrée de l'instrumentation est exposé sous forme de`WithOperationTiming`, qui est paramétré pour accepter une fonction de gestion des messages qui recevra les « événements » de l'instrumentation sous forme de chaînes formatées. `PrintfMSGHandler`est fourni pour des raisons pratiques, qui déposeront simplement les messages sur stdout.

Le service utilisé ici est interchangeable : TOUTES les options du client de service sont acceptées `APIOptions` et une configuration `HTTPClient` en tant que. Par exemple, `WithOperationTiming` pourrait plutôt être déclaré comme suit :

```
func WithOperationTiming(msgHandler func(string)) func(*s3.Options)
func WithOperationTiming(msgHandler func(string)) func(*dynamodb.Options)
// etc.
```

Si vous le modifiez, assurez-vous de modifier également la signature de la fonction qu'il renvoie.

```
import (
    "context"
    "fmt"
    "log"
    "net/http"
    "sync"
    "time"

    awsmiddleware "github.com/aws/aws-sdk-go-v2/aws/middleware"
    awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/sqs"
    "github.com/aws/smithy-go/middleware"
    smithyrand "github.com/aws/smithy-go/rand"
)

// WithOperationTiming instruments an SQS client to dump timing information for
// the following spans:
//   - overall operation time
//   - HTTPClient call time
```

```
//
// This instrumentation will also emit the request ID, service name, and
// operation name for each invocation.
//
// Accepts a message "handler" which is invoked with formatted messages to be
// handled externally, you can use the declared PrintfMSGHandler to simply dump
// these values to stdout.
func WithOperationTiming(msgHandler func(string)) func(*sqs.Options) {
    return func(o *sqs.Options) {
        o.APIOptions = append(o.APIOptions, addTimingMiddlewares(msgHandler))
        o.HTTPClient = &timedHTTPClient{
            client:     awshttp.NewBuildableClient(),
            msgHandler: msgHandler,
        }
    }
}

// PrintfMSGHandler writes messages to stdout.
func PrintfMSGHandler(msg string) {
    fmt.Printf("%s\n", msg)
}

type invokeIDKey struct{}

func setInvokeID(ctx context.Context, id string) context.Context {
    return middleware.WithStackValue(ctx, invokeIDKey{}, id)
}

func getInvokeID(ctx context.Context) string {
    id, _ := middleware.GetStackValue(ctx, invokeIDKey{}).(string)
    return id
}

// Records the current time, and returns a function to be called when the
// target span of events is completed. The return function will emit the given
// span name and time elapsed to the given message consumer.
func timeSpan(ctx context.Context, name string, consumer func(string)) func() {
    start := time.Now()
    return func() {
        elapsed := time.Now().Sub(start)
        consumer(fmt.Sprintf("[%s] %s: %s", getInvokeID(ctx), name, elapsed))
    }
}
```

```
type timedHTTPClient struct {
    client     *awshttp.BuildableClient
    msgHandler func(string)
}

func (c *timedHTTPClient) Do(r *http.Request) (*http.Response, error) {
    defer timeSpan(r.Context(), "http", c.msgHandler)()

    resp, err := c.client.Do(r)
    if err != nil {
        return nil, fmt.Errorf("inner client do: %v", err)
    }

    return resp, nil
}

type addInvokeIDMiddleware struct {
    msgHandler func(string)
}

func (*addInvokeIDMiddleware) ID() string { return "addInvokeID" }

func (*addInvokeIDMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    out middleware.InitializeOutput, md middleware.Metadata, err error,
) {
    id, err := smithyrand.NewUUID(smithyrand.Reader).GetUUID()
    if err != nil {
        return out, md, fmt.Errorf("new uuid: %v", err)
    }

    return next.HandleInitialize(setInvokeID(ctx, id), in)
}

type timeOperationMiddleware struct {
    msgHandler func(string)
}

func (*timeOperationMiddleware) ID() string { return "timeOperation" }

func (m *timeOperationMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    middleware.InitializeOutput, middleware.Metadata, error,
) {
```

```
    defer timeSpan(ctx, "operation", m.msgHandler)()
    return next.HandleInitialize(ctx, in)
}

type emitMetadataMiddleware struct {
    msgHandler func(string)
}

func (*emitMetadataMiddleware) ID() string { return "emitMetadata" }

func (m *emitMetadataMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    middleware.InitializeOutput, middleware.Metadata, error,
) {
    out, md, err := next.HandleInitialize(ctx, in)

    invokeID := getInvokeID(ctx)
    requestID, _ := awsmiddleware.GetRequestIDMetadata(md)
    service := awsmiddleware.GetServiceID(ctx)
    operation := awsmiddleware.GetOperationName(ctx)
    m.msgHandler(fmt.Sprintf(`[%s] requestID = "%s"`, invokeID, requestID))
    m.msgHandler(fmt.Sprintf(`[%s] service   = "%s"`, invokeID, service))
    m.msgHandler(fmt.Sprintf(`[%s] operation = "%s"`, invokeID, operation))

    return out, md, err
}

func addTimingMiddlewares(mh func(string)) func(*middleware.Stack) error {
    return func(s *middleware.Stack) error {
        if err := s.Initialize.Add(&timeOperationMiddleware{msgHandler: mh},
 middleware.Before); err != nil {
            return fmt.Errorf("add time operation middleware: %v", err)
        }
        if err := s.Initialize.Add(&addInvokeIDMiddleware{msgHandler: mh},
 middleware.Before); err != nil {
            return fmt.Errorf("add invoke id middleware: %v", err)
        }
        if err := s.Initialize.Insert(&emitMetadataMiddleware{msgHandler: mh},
 "RegisterServiceMetadata", middleware.After); err != nil {
            return fmt.Errorf("add emit metadata middleware: %v", err)
        }
        return nil
    }
}
```

```
func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        log.Fatal(fmt.Errorf("load default config: %v", err))
    }

    svc := sqs.NewFromConfig(cfg, WithOperationTiming(PrintfMSGHandler))

    var wg sync.WaitGroup

    for i := 0; i < 6; i++ {
        wg.Add(1)
        go func() {
            defer wg.Done()

            _, err = svc.ListQueues(context.Background(), nil)
            if err != nil {
                fmt.Println(fmt.Errorf("list queues: %v", err))
            }
        }()
    }
    wg.Wait()
}
```

Voici un exemple de résultat de ce programme :

```
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] http: 192.24067ms
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] requestID = "dbee3082-96a3-5b23-
adca-6d005696fa94"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] service   = "SQS"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] operation = "ListQueues"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] operation: 193.098393ms
[0740f0e0-953e-4328-94fc-830a5052e763] http: 195.185732ms
[0740f0e0-953e-4328-94fc-830a5052e763] requestID = "48b301fa-
fc9f-5f1f-9007-5c783caa9322"
[0740f0e0-953e-4328-94fc-830a5052e763] service   = "SQS"
[0740f0e0-953e-4328-94fc-830a5052e763] operation = "ListQueues"
[0740f0e0-953e-4328-94fc-830a5052e763] operation: 195.725491ms
[c0589832-f351-4cc7-84f1-c656eb79dbd7] http: 200.52383ms
[444030d0-6743-4de5-bd91-bc40b2b94c55] http: 200.525919ms
[c0589832-f351-4cc7-84f1-c656eb79dbd7] requestID = "4a73cc82-b47b-56e1-
b327-9100744e1b1f"
```

```
[c0589832-f351-4cc7-84f1-c656eb79dbd7] service   = "SQS"
[c0589832-f351-4cc7-84f1-c656eb79dbd7] operation = "ListQueues"
[c0589832-f351-4cc7-84f1-c656eb79dbd7] operation: 201.214365ms
[444030d0-6743-4de5-bd91-bc40b2b94c55] requestID = "ca1523ed-1879-5610-
bf5d-7e6fd84cabee"
[444030d0-6743-4de5-bd91-bc40b2b94c55] service   = "SQS"
[444030d0-6743-4de5-bd91-bc40b2b94c55] operation = "ListQueues"
[444030d0-6743-4de5-bd91-bc40b2b94c55] operation: 201.197071ms
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] http: 206.449568ms
[12b2b39d-df86-4648-a436-ff0482d13340] http: 206.526603ms
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] requestID = "64229710-b552-56ed-8f96-
ca927567ec7b"
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] service   = "SQS"
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] operation = "ListQueues"
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] operation: 207.252357ms
[12b2b39d-df86-4648-a436-ff0482d13340] requestID =
 "76d9cbc0-07aa-58aa-98b7-9642c79f9851"
[12b2b39d-df86-4648-a436-ff0482d13340] service   = "SQS"
[12b2b39d-df86-4648-a436-ff0482d13340] operation = "ListQueues"
[12b2b39d-df86-4648-a436-ff0482d13340] operation: 207.360621ms
```

Tests unitaires avec la AWS SDK pour Go v2

Lorsque vous utilisez le SDK dans votre application, vous devez simuler le SDK pour le test unitaire de votre application. Le fait de simuler le SDK permet à votre test de se concentrer sur ce que vous souhaitez tester, et non sur les composants internes du SDK.

Pour prendre en charge le simulacre, utilisez des interfaces Go plutôt que des types de clients de service, de paginateurs et de serveurs concrets, tels que. `s3.Client` Cela permet à votre application d'utiliser des modèles tels que l'injection de dépendances pour tester la logique de votre application.

Se moquer des opérations des clients

Dans cet exemple, `S3GetObjectAPI` il s'agit d'une interface qui définit l'ensemble des opérations d'API Amazon S3 requises par la `GetObjectFromS3` fonction. `S3GetObjectAPI`est satisfait de la GetObjectméthode du client Amazon S3.

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type S3GetObjectAPI interface {
    GetObject(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error)
}

func GetObjectFromS3(ctx context.Context, api S3GetObjectAPI, bucket, key string)
 ([]byte, error) {
    object, err := api.GetObject(ctx, &s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return ioutil.ReadAll(object.Body)
}
```

Pour tester la `GetObjectFromS3` fonction, utilisez le `mockGetObjectAPI` pour satisfaire à la définition de `S3GetObjectAPI` l'interface. Utilisez ensuite le `mockGetObjectAPI` type pour simuler la sortie et les réponses d'erreur renvoyées par le client de service.

```
import "testing"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type mockGetObjectAPI func(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error)

func (m mockGetObjectAPI) GetObject(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error) {
    return m(ctx, params, optFns...)
}

func TestGetObjectFromS3(t *testing.T) {
    cases := []struct {
        client func(t *testing.T) S3GetObjectAPI
        bucket string
        key string
        expect []byte
    }{
        {
            client: func(t *testing.T) S3GetObjectAPI {
                return mockGetObjectAPI(func(ctx context.Context, params
 *s3.GetObjectInput, optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error) {
                    t.Helper()
                    if params.Bucket == nil {
                        t.Fatal("expect bucket to not be nil")
                    }
                    if e, a := "fooBucket", *params.Bucket; e != a {
                        t.Errorf("expect %v, got %v", e, a)
                    }
                    if params.Key == nil {
                        t.Fatal("expect key to not be nil")
                    }
                    if e, a := "barKey", *params.Key; e != a {
                        t.Errorf("expect %v, got %v", e, a)
                    }

                    return &s3.GetObjectOutput{
```

```
                        Body: ioutil.NopCloser(bytes.NewReader([]byte("this is the body
 foo bar baz"))),
                    }, nil
                })
            },
            bucket: "amzn-s3-demo-bucket>",
            key:    "barKey",
            expect: []byte("this is the body foo bar baz"),
        },
    }

    for i, tt := range cases {
        t.Run(strconv.Itoa(i), func(t *testing.T) {
            ctx := context.TODO()
            content, err := GetObjectFromS3(ctx, tt.client(t), tt.bucket, tt.key)
            if err != nil {
                t.Fatalf("expect no error, got %v", err)
            }
            if e, a := tt.expect, content; bytes.Compare(e, a) != 0 {
                t.Errorf("expect %v, got %v", e, a)
            }
        })
    }
}
```

Paginateurs moqueurs

À l'instar des clients de service, les paginateurs peuvent être simulés en définissant une interface Go pour le paginateur. Cette interface serait utilisée par le code de votre application. Cela permet d'utiliser l'implémentation du SDK lorsque votre application est en cours d'exécution et d'utiliser une implémentation simulée à des fins de test.

Dans l'exemple suivant, `ListObjectsV2Pager` il s'agit d'une interface qui définit les comportements de l'Amazon S3 ListObjectsV2Paginator requis par fonction. `CountObjects`

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type ListObjectsV2Pager interface {
    HasMorePages() bool
```

```
    NextPage(context.Context, ...func(*s3.Options)) (*s3.ListObjectsV2Output, error)
}

func CountObjects(ctx context.Context, pager ListObjectsV2Pager) (count int, err error)
 {
    for pager.HasMorePages() {
        var output *s3.ListObjectsV2Output
        output, err = pager.NextPage(ctx)
        if err != nil {
            return count, err
        }
        count += int(output.KeyCount)
    }
    return count, nil
}
```

Pour tester`CountObjects`, créez le `mockListObjectsV2Pager` type correspondant à la définition de `ListObjectsV2Pager` l'interface. Utilisez-le ensuite `mockListObjectsV2Pager` pour reproduire le comportement de pagination des réponses de sortie et d'erreur du paginateur des opérations de service.

```
import "context"
import  "fmt"
import "testing"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type mockListObjectsV2Pager struct {
    PageNum int
    Pages   []*s3.ListObjectsV2Output
}

func (m *mockListObjectsV2Pager) HasMorePages() bool {
    return m.PageNum < len(m.Pages)
}

func (m *mockListObjectsV2Pager) NextPage(ctx context.Context, f ...func(*s3.Options))
 (output *s3.ListObjectsV2Output, err error) {
    if m.PageNum >= len(m.Pages) {
        return nil, fmt.Errorf("no more pages")
    }
    output = m.Pages[m.PageNum]
```

```
    m.PageNum++
    return output, nil
}

func TestCountObjects(t *testing.T) {
    pager := &mockListObjectsV2Pager{
        Pages: []*s3.ListObjectsV2Output{
            {
                KeyCount: 5,
            },
            {
                KeyCount: 10,
            },
            {
                KeyCount: 15,
            },
        },
    }
    objects, err := CountObjects(context.TODO(), pager)
    if err != nil {
        t.Fatalf("expect no error, got %v", err)
    }
    if expect, actual := 30, objects; expect != actual {
        t.Errorf("expect %v, got %v", expect, actual)
    }
}
```

Exemples de code du SDK pour Go V2

Les exemples de code présentés dans cette rubrique vous montrent comment utiliser la AWS SDK pour Go V2 avec AWS.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

Certains services contiennent des exemples de catégories supplémentaires qui montrent comment tirer parti des bibliothèques ou des fonctions spécifiques au service.

Services

- Exemples d'API Gateway utilisant le SDK pour Go V2
- Exemples d'Aurora utilisant le SDK pour Go V2
- Exemples d'Amazon Bedrock utilisant le SDK pour Go V2
- Exemples d'Amazon Bedrock Runtime utilisant le SDK pour Go V2
- AWS CloudFormation exemples d'utilisation du SDK pour Go V2
- CloudWatch Exemples de journaux utilisant le SDK pour Go V2
- Exemples de fournisseurs d'identité Amazon Cognito utilisant le SDK pour Go V2
- Exemples d'Amazon DocumentDB utilisant le SDK pour Go V2
- Exemples DynamoDB utilisant le SDK pour Go V2
- Exemples d'IAM utilisant le SDK pour Go V2
- Exemples de Kinesis utilisant le SDK pour Go V2
- Exemples Lambda utilisant le SDK pour Go V2
- Exemples Amazon MSK utilisant le SDK pour Go V2
- Exemples d'utilisation du SDK pour Go V2 par Partner Central
- Exemples d'Amazon RDS utilisant le SDK pour Go V2

- Exemples d'Amazon Redshift utilisant le SDK pour Go V2
- Exemples d'Amazon S3 utilisant le SDK pour Go V2
- Exemples d'Amazon SNS utilisant le SDK pour Go V2
- Exemples d'Amazon SQS utilisant le SDK pour Go V2

Exemples d'API Gateway utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec API Gateway.

AWS les contributions communautaires sont des exemples qui ont été créés et sont maintenus par plusieurs équipes AWS. Pour fournir des commentaires, utilisez le mécanisme fourni dans les référentiels liés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- AWS contributions communautaires

AWS contributions communautaires

Création et test d'une application sans serveur

L'exemple de code suivant montre comment créer et tester une application sans serveur à l'aide d'API Gateway avec Lambda et DynamoDB

Kit SDK for Go V2

> Montre comment créer et tester une application sans serveur composée d'une API Gateway avec Lambda et DynamoDB à l'aide du SDK Go.
>
> Pour obtenir le code source complet et les instructions de configuration et d'exécution, consultez l'exemple complet sur GitHub.
>
> Les services utilisés dans cet exemple
>
> - API Gateway

- DynamoDB
- Lambda

Exemples d'Aurora utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Aurora.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Aurora

Les exemples de code suivants montrent comment bien démarrer avec Aurora.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/rds"
)

// main uses the AWS SDK for Go V2 to create an Amazon Aurora client and list up to
 20
// DB clusters in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 auroraClient := rds.NewFromConfig(sdkConfig)
 const maxClusters = 20
 fmt.Printf("Let's list up to %v DB clusters.\n", maxClusters)
 output, err := auroraClient.DescribeDBClusters(
  ctx, &rds.DescribeDBClustersInput{MaxRecords: aws.Int32(maxClusters)})
 if err != nil {
  fmt.Printf("Couldn't list DB clusters: %v\n", err)
  return
 }
 if len(output.DBClusters) == 0 {
  fmt.Println("No DB clusters found.")
 } else {
  for _, cluster := range output.DBClusters {
   fmt.Printf("DB cluster %v has database %v.\n", *cluster.DBClusterIdentifier,
    *cluster.DatabaseName)
  }
 }
}
```

- Pour plus de détails sur l'API, voir Description DBClusters dans le manuel de référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- Créez un groupe de paramètres pour le cluster de base de données Aurora personnalisé et définissez des valeurs pour les paramètres.
- Créez un cluster de base de données qui utilise le groupe de paramètres.
- Créez une instance de base de données qui contient une base de données.
- Prenez un instantané du cluster de base de données, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "aurora/actions"
 "context"
 "fmt"
 "log"
 "slices"
 "sort"
 "strconv"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
```

```
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/google/uuid"
)

// GetStartedClusters is an interactive example that shows you how to use the AWS
 SDK for Go
// with Amazon Aurora to do the following:
//
// 1. Create a custom DB cluster parameter group and set parameter values.
// 2. Create an Aurora DB cluster that is configured to use the parameter group.
// 3. Create a DB instance in the DB cluster that contains a database.
// 4. Take a snapshot of the DB cluster.
// 5. Delete the DB instance, DB cluster, and parameter group.
type GetStartedClusters struct {
 sdkConfig  aws.Config
 dbClusters actions.DbClusters
 questioner demotools.IQuestioner
 helper     IScenarioHelper
 isTestRun  bool
}

// NewGetStartedClusters constructs a GetStartedClusters instance from a
 configuration.
// It uses the specified config to get an Amazon Relational Database Service (Amazon
 RDS)
// client and create wrappers for the actions used in the scenario.
func NewGetStartedClusters(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) GetStartedClusters {
 auroraClient := rds.NewFromConfig(sdkConfig)
 return GetStartedClusters{
  sdkConfig:  sdkConfig,
  dbClusters: actions.DbClusters{AuroraClient: auroraClient},
  questioner: questioner,
  helper:     helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedClusters) Run(ctx context.Context, dbEngine string,
 parameterGroupName string,
 clusterName string, dbName string) {
 defer func() {
  if r := recover(); r != nil {
```

```
    log.Println("Something went wrong with the demo.")
   }
  }()

  log.Println(strings.Repeat("-", 88))
  log.Println("Welcome to the Amazon Aurora DB Cluster demo.")
  log.Println(strings.Repeat("-", 88))

  parameterGroup := scenario.CreateParameterGroup(ctx, dbEngine, parameterGroupName)
  scenario.SetUserParameters(ctx, parameterGroupName)
  cluster := scenario.CreateCluster(ctx, clusterName, dbEngine, dbName,
  parameterGroup)
  scenario.helper.Pause(5)
  dbInstance := scenario.CreateInstance(ctx, cluster)
  scenario.DisplayConnection(cluster)
  scenario.CreateSnapshot(ctx, clusterName)
  scenario.Cleanup(ctx, dbInstance, cluster, parameterGroup)

  log.Println(strings.Repeat("-", 88))
  log.Println("Thanks for watching!")
  log.Println(strings.Repeat("-", 88))
}

// CreateParameterGroup shows how to get available engine versions for a specified
// database engine and create a DB cluster parameter group that is compatible with a
// selected engine family.
func (scenario GetStartedClusters) CreateParameterGroup(ctx context.Context,
 dbEngine string,
 parameterGroupName string) *types.DBClusterParameterGroup {

 log.Printf("Checking for an existing DB cluster parameter group named %v.\n",
  parameterGroupName)
 parameterGroup, err := scenario.dbClusters.GetParameterGroup(ctx,
 parameterGroupName)
 if err != nil {
  panic(err)
 }
 if parameterGroup == nil {
  log.Printf("Getting available database engine versions for %v.\n", dbEngine)
  engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine, "")
  if err != nil {
   panic(err)
  }
```

```
  familySet := map[string]struct{}{}
  for _, family := range engineVersions {
   familySet[*family.DBParameterGroupFamily] = struct{}{}
  }
  var families []string
  for family := range familySet {
   families = append(families, family)
  }
  sort.Strings(families)
  familyIndex := scenario.questioner.AskChoice("Which family do you want to use?\n",
 families)
  log.Println("Creating a DB cluster parameter group.")
  _, err = scenario.dbClusters.CreateParameterGroup(
   ctx, parameterGroupName, families[familyIndex], "Example parameter group.")
  if err != nil {
   panic(err)
  }
  parameterGroup, err = scenario.dbClusters.GetParameterGroup(ctx,
 parameterGroupName)
  if err != nil {
   panic(err)
  }
 }
 log.Printf("Parameter group %v:\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tName: %v\n", *parameterGroup.DBClusterParameterGroupName)
 log.Printf("\tARN: %v\n", *parameterGroup.DBClusterParameterGroupArn)
 log.Printf("\tFamily: %v\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tDescription: %v\n", *parameterGroup.Description)
 log.Println(strings.Repeat("-", 88))
 return parameterGroup

}

// SetUserParameters shows how to get the parameters contained in a custom parameter
// group and update some of the parameter values in the group.
func (scenario GetStartedClusters) SetUserParameters(ctx context.Context,
 parameterGroupName string) {
 log.Println("Let's set some parameter values in your parameter group.")
 dbParameters, err := scenario.dbClusters.GetParameters(ctx, parameterGroupName, "")
 if err != nil {
  panic(err)
 }
 var updateParams []types.Parameter
 for _, dbParam := range dbParameters {
```

```
  if strings.HasPrefix(*dbParam.ParameterName, "auto_increment") &&
   *dbParam.IsModifiable && *dbParam.DataType == "integer" {
   log.Printf("The %v parameter is described as:\n\t%v",
    *dbParam.ParameterName, *dbParam.Description)
   rangeSplit := strings.Split(*dbParam.AllowedValues, "-")
   lower, _ := strconv.Atoi(rangeSplit[0])
   upper, _ := strconv.Atoi(rangeSplit[1])
   newValue := scenario.questioner.AskInt(
    fmt.Sprintf("Enter a value between %v and %v:", lower, upper),
    demotools.InIntRange{Lower: lower, Upper: upper})
   dbParam.ParameterValue = aws.String(strconv.Itoa(newValue))
   updateParams = append(updateParams, dbParam)
  }
 }
 err = scenario.dbClusters.UpdateParameters(ctx, parameterGroupName, updateParams)
 if err != nil {
  panic(err)
 }
 log.Println("You can get a list of parameters you've set by specifying a source of
 'user'.")
 userParameters, err := scenario.dbClusters.GetParameters(ctx, parameterGroupName,
 "user")
 if err != nil {
  panic(err)
 }
 log.Println("Here are the parameters you've set:")
 for _, param := range userParameters {
  log.Printf("\t%v: %v\n", *param.ParameterName, *param.ParameterValue)
 }
 log.Println(strings.Repeat("-", 88))
}

// CreateCluster shows how to create an Aurora DB cluster that contains a database
// of a specified type. The database is also configured to use a custom DB cluster
// parameter group.
func (scenario GetStartedClusters) CreateCluster(ctx context.Context, clusterName
 string, dbEngine string,
 dbName string, parameterGroup *types.DBClusterParameterGroup) *types.DBCluster {

 log.Println("Checking for an existing DB cluster.")
 cluster, err := scenario.dbClusters.GetDbCluster(ctx, clusterName)
 if err != nil {
  panic(err)
 }
```

```
 if cluster == nil {
  adminUsername := scenario.questioner.Ask(
   "Enter an administrator user name for the database: ", demotools.NotEmpty{})
  adminPassword := scenario.questioner.Ask(
   "Enter a password for the administrator (at least 8 characters): ",
 demotools.NotEmpty{})
  engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine,
 *parameterGroup.DBParameterGroupFamily)
  if err != nil {
   panic(err)
  }
  var engineChoices []string
  for _, engine := range engineVersions {
   engineChoices = append(engineChoices, *engine.EngineVersion)
  }
  log.Println("The available engines for your parameter group are:")
  engineIndex := scenario.questioner.AskChoice("Which engine do you want to use?\n",
 engineChoices)
  log.Printf("Creating DB cluster %v and database %v.\n", clusterName, dbName)
  log.Printf("The DB cluster is configured to use\nyour custom parameter group %v
\n",
   *parameterGroup.DBClusterParameterGroupName)
  log.Printf("and selected engine %v.\n", engineChoices[engineIndex])
  log.Println("This typically takes several minutes.")
  cluster, err = scenario.dbClusters.CreateDbCluster(
   ctx, clusterName, *parameterGroup.DBClusterParameterGroupName, dbName, dbEngine,
   engineChoices[engineIndex], adminUsername, adminPassword)
  if err != nil {
   panic(err)
  }
  for *cluster.Status != "available" {
   scenario.helper.Pause(30)
   cluster, err = scenario.dbClusters.GetDbCluster(ctx, clusterName)
   if err != nil {
    panic(err)
   }
   log.Println("Cluster created and available.")
  }
 }
 log.Println("Cluster data:")
 log.Printf("\tDBClusterIdentifier: %v\n", *cluster.DBClusterIdentifier)
 log.Printf("\tARN: %v\n", *cluster.DBClusterArn)
 log.Printf("\tStatus: %v\n", *cluster.Status)
 log.Printf("\tEngine: %v\n", *cluster.Engine)
```

```
 log.Printf("\tEngine version: %v\n", *cluster.EngineVersion)
 log.Printf("\tDBClusterParameterGroup: %v\n", *cluster.DBClusterParameterGroup)
 log.Printf("\tEngineMode: %v\n", *cluster.EngineMode)
 log.Println(strings.Repeat("-", 88))
 return cluster
}

// CreateInstance shows how to create a DB instance in an existing Aurora DB
 cluster.
// A new DB cluster contains no DB instances, so you must add one. The first DB
 instance
// that is added to a DB cluster defaults to a read-write DB instance.
func (scenario GetStartedClusters) CreateInstance(ctx context.Context, cluster
 *types.DBCluster) *types.DBInstance {
 log.Println("Checking for an existing database instance.")
 dbInstance, err := scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
 if err != nil {
  panic(err)
 }
 if dbInstance == nil {
  log.Println("Let's create a database instance in your DB cluster.")
  log.Println("First, choose a DB instance type:")
  instOpts, err := scenario.dbClusters.GetOrderableInstances(
   ctx, *cluster.Engine, *cluster.EngineVersion)
  if err != nil {
   panic(err)
  }
  var instChoices []string
  for _, opt := range instOpts {
   instChoices = append(instChoices, *opt.DBInstanceClass)
  }
  slices.Sort(instChoices)
  instChoices = slices.Compact(instChoices)
  instIndex := scenario.questioner.AskChoice(
   "Which DB instance class do you want to use?\n", instChoices)
  log.Println("Creating a database instance. This typically takes several minutes.")
  dbInstance, err = scenario.dbClusters.CreateInstanceInCluster(
   ctx, *cluster.DBClusterIdentifier, *cluster.DBClusterIdentifier, *cluster.Engine,
   instChoices[instIndex])
  if err != nil {
   panic(err)
  }
  for *dbInstance.DBInstanceStatus != "available" {
```

```
   scenario.helper.Pause(30)
   dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
   if err != nil {
    panic(err)
   }
  }
 }
 log.Println("Instance data:")
 log.Printf("\tDBInstanceIdentifier: %v\n", *dbInstance.DBInstanceIdentifier)
 log.Printf("\tARN: %v\n", *dbInstance.DBInstanceArn)
 log.Printf("\tStatus: %v\n", *dbInstance.DBInstanceStatus)
 log.Printf("\tEngine: %v\n", *dbInstance.Engine)
 log.Printf("\tEngine version: %v\n", *dbInstance.EngineVersion)
 log.Println(strings.Repeat("-", 88))
 return dbInstance
}

// DisplayConnection displays connection information about an Aurora DB cluster and
 tips
// on how to connect to it.
func (scenario GetStartedClusters) DisplayConnection(cluster *types.DBCluster) {
 log.Println(
  "You can now connect to your database using your favorite MySql client.\n" +
   "One way to connect is by using the 'mysql' shell on an Amazon EC2 instance\n" +
   "that is running in the same VPC as your database cluster. Pass the endpoint,\n"
 +
   "port, and administrator user name to 'mysql' and enter your password\n" +
   "when prompted:")
 log.Printf("\n\tmysql -h %v -P %v -u %v -p\n",
  *cluster.Endpoint, *cluster.Port, *cluster.MasterUsername)
 log.Println("For more information, see the User Guide for Aurora:\n" +
  "\thttps://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/
CHAP_GettingStartedAurora.CreatingConnecting.Aurora.html#CHAP_GettingStartedAurora.Aurora.Co
 log.Println(strings.Repeat("-", 88))
}

// CreateSnapshot shows how to create a DB cluster snapshot and wait until it's
 available.
func (scenario GetStartedClusters) CreateSnapshot(ctx context.Context, clusterName
 string) {
 if scenario.questioner.AskBool(
  "Do you want to create a snapshot of your DB cluster (y/n)? ", "y") {
  snapshotId := fmt.Sprintf("%v-%v", clusterName, scenario.helper.UniqueId())
```

```
  log.Printf("Creating a snapshot named %v. This typically takes a few minutes.\n",
 snapshotId)
  snapshot, err := scenario.dbClusters.CreateClusterSnapshot(ctx, clusterName,
 snapshotId)
  if err != nil {
   panic(err)
  }
  for *snapshot.Status != "available" {
   scenario.helper.Pause(30)
   snapshot, err = scenario.dbClusters.GetClusterSnapshot(ctx, snapshotId)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Snapshot data:")
  log.Printf("\tDBClusterSnapshotIdentifier: %v\n",
 *snapshot.DBClusterSnapshotIdentifier)
  log.Printf("\tARN: %v\n", *snapshot.DBClusterSnapshotArn)
  log.Printf("\tStatus: %v\n", *snapshot.Status)
  log.Printf("\tEngine: %v\n", *snapshot.Engine)
  log.Printf("\tEngine version: %v\n", *snapshot.EngineVersion)
  log.Printf("\tDBClusterIdentifier: %v\n", *snapshot.DBClusterIdentifier)
  log.Printf("\tSnapshotCreateTime: %v\n", *snapshot.SnapshotCreateTime)
  log.Println(strings.Repeat("-", 88))
 }
}

// Cleanup shows how to clean up a DB instance, DB cluster, and DB cluster parameter
 group.
// Before the DB cluster parameter group can be deleted, all associated DB instances
 and
// DB clusters must first be deleted.
func (scenario GetStartedClusters) Cleanup(ctx context.Context, dbInstance
 *types.DBInstance, cluster *types.DBCluster,
 parameterGroup *types.DBClusterParameterGroup) {

 if scenario.questioner.AskBool(
  "\nDo you want to delete the database instance, DB cluster, and parameter group
 (y/n)? ", "y") {
  log.Printf("Deleting database instance %v.\n", *dbInstance.DBInstanceIdentifier)
  err := scenario.dbClusters.DeleteInstance(ctx, *dbInstance.DBInstanceIdentifier)
  if err != nil {
   panic(err)
  }
```

```
  log.Printf("Deleting database cluster %v.\n", *cluster.DBClusterIdentifier)
  err = scenario.dbClusters.DeleteDbCluster(ctx, *cluster.DBClusterIdentifier)
  if err != nil {
   panic(err)
  }
  log.Println(
   "Waiting for the DB instance and DB cluster to delete. This typically takes
 several minutes.")
  for dbInstance != nil || cluster != nil {
   scenario.helper.Pause(30)
   if dbInstance != nil {
    dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *dbInstance.DBInstanceIdentifier)
    if err != nil {
     panic(err)
    }
   }
   if cluster != nil {
    cluster, err = scenario.dbClusters.GetDbCluster(ctx,
 *cluster.DBClusterIdentifier)
    if err != nil {
     panic(err)
    }
   }
  }
  log.Printf("Deleting parameter group %v.",
 *parameterGroup.DBClusterParameterGroupName)
  err = scenario.dbClusters.DeleteParameterGroup(ctx,
 *parameterGroup.DBClusterParameterGroupName)
  if err != nil {
   panic(err)
  }
 }
}

// IScenarioHelper abstracts the function from a scenario so that it
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 UniqueId() string
}
type ScenarioHelper struct{}

// Pause waits for the specified number of seconds.
```

```
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}

// UniqueId returns a new UUID.
func (helper ScenarioHelper) UniqueId() string {
 return uuid.New().String()
}
```

Définissez des fonctions appelées par le scénario pour gérer des actions Aurora.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}


// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
```

```
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBClusterParameterGroups[0], err
 }
}


// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
```

```
  return nil
 }
}



// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context, parameterGroupName
 string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
```

```
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified engine
 and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName string,
 parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {
```

```
 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
  DatabaseName:                aws.String(dbName),
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context, clusterName
 string, snapshotName string) (
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
```

```
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBClusterSnapshot, nil
 }
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context, clusterName
 string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
```

```
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}



// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string) (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}



// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
```

```
 }
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
```

```
  if err != nil {
   log.Printf("Couldn't get orderable DB instances: %v\n", err)
   break
  } else {
   instances = append(instances, output.OrderableDBInstanceOptions...)
  }
 }
 return instances, err
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CréerDBCluster
  - CréerDBClusterParameterGroup
  - Créer un DBCluster instantané
  - CréerDBInstance
  - SuppressionDBCluster
  - SuppressionDBClusterParameterGroup
  - SuppressionDBInstance
  - Décrivez DBCluster ParameterGroups
  - Décrire DBCluster les paramètres
  - Décrire les DBCluster instantanés
  - Décrivez DBClusters
  - Décrire DBEngine les versions
  - Décrivez DBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

Actions

`CreateDBCluster`

L'exemple de code suivant montre comment utiliser`CreateDBCluster`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified engine
 and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName string,
 parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {

 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
  DatabaseName:                aws.String(dbName),
```

```
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}
```

- Pour plus de détails sur l'API, consultez Create DBCluster in AWS SDK pour Go API Reference.

`CreateDBClusterParameterGroup`

L'exemple de code suivant montre comment utiliser`CreateDBClusterParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
```

```
 AuroraClient *rds.Client
}



// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}
```

- Pour plus de détails sur l'API, consultez Create DBCluster ParameterGroup in AWS SDK pour Go API Reference.

`CreateDBClusterSnapshot`

L'exemple de code suivant montre comment utiliser`CreateDBClusterSnapshot`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context, clusterName
 string, snapshotName string) (
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBClusterSnapshot, nil
 }
}
```

- Pour plus de détails sur l'API, consultez la section Créer un DBCluster instantané dans le manuel de référence des AWS SDK pour Go API.

`CreateDBInstance`

L'exemple de code suivant montre comment utiliser`CreateDBInstance`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context, clusterName
 string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
```

```
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

- Pour plus de détails sur l'API, consultez Create DBInstance in AWS SDK pour Go API Reference.

`DeleteDBCluster`

L'exemple de code suivant montre comment utiliser`DeleteDBCluster`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
```

```
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Supprimer DBCluster dans le manuel de référence des AWS SDK pour Go API.

`DeleteDBClusterParameterGroup`

L'exemple de code suivant montre comment utiliser`DeleteDBClusterParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Supprimer DBCluster ParameterGroup dans le manuel de référence des AWS SDK pour Go API.

`DeleteDBInstance`

L'exemple de code suivant montre comment utiliser`DeleteDBInstance`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Supprimer DBInstance dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBClusterParameterGroups`

L'exemple de code suivant montre comment utiliser`DescribeDBClusterParameterGroups`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
```

```
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBClusterParameterGroups[0], err
 }
}
```

- Pour plus de détails sur l'API, voir Description DBCluster ParameterGroups dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBClusterParameters`

L'exemple de code suivant montre comment utiliser`DescribeDBClusterParameters`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
```

```
 AuroraClient *rds.Client
}



// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}
```

- Pour plus de détails sur l'API, consultez la section Décrire DBCluster les paramètres dans le AWS SDK pour Go manuel de référence des API.

`DescribeDBClusterSnapshots`

L'exemple de code suivant montre comment utiliser`DescribeDBClusterSnapshots`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}
```

- Pour plus de détails sur l'API, consultez la section Décrire les DBCluster instantanés dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBClusters`

L'exemple de code suivant montre comment utiliser`DescribeDBClusters`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
```

```
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}
```

- Pour plus de détails sur l'API, voir Description DBClusters dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBEngineVersions`

L'exemple de code suivant montre comment utiliser`DescribeDBEngineVersions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
```

```
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}
```

- Pour plus de détails sur l'API, consultez la section Description DBEngine des versions dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBInstances`

L'exemple de code suivant montre comment utiliser`DescribeDBInstances`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string) (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}
```

- Pour plus de détails sur l'API, voir Description DBInstances dans le manuel de référence des AWS SDK pour Go API.

`DescribeOrderableDBInstanceOptions`

L'exemple de code suivant montre comment utiliser`DescribeOrderableDBInstanceOptions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
```

```
    EngineVersion: aws.String(engineVersion),
   })
  for orderablePaginator.HasMorePages() {
   output, err = orderablePaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't get orderable DB instances: %v\n", err)
    break
   } else {
    instances = append(instances, output.OrderableDBInstanceOptions...)
   }
  }
  return instances, err
}
```

- Pour plus de détails sur l'API, consultez la section DescribeOrderableDBInstanceOptions du manuel de référence des AWS SDK pour Go API.

`ModifyDBClusterParameterGroup`

L'exemple de code suivant montre comment utiliser`ModifyDBClusterParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)
```

```
type DbClusters struct {
 AuroraClient *rds.Client
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context, parameterGroupName
 string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Modifier DBCluster ParameterGroup dans le manuel de référence des AWS SDK pour Go API.

Exemples d'Amazon Bedrock utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants en utilisant la AWS SDK pour Go V2 avec Amazon Bedrock.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Amazon Bedrock

Les exemples de code suivants montrent comment commencer à utiliser Amazon Bedrock.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/bedrock"
)

const region = "us-east-1"

// main uses the AWS SDK for Go (v2) to create an Amazon Bedrock client and
// list the available foundation models in your account and the chosen region.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx, config.WithRegion(region))
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 bedrockClient := bedrock.NewFromConfig(sdkConfig)
 result, err := bedrockClient.ListFoundationModels(ctx,
 &bedrock.ListFoundationModelsInput{})
 if err != nil {
  fmt.Printf("Couldn't list foundation models. Here's why: %v\n", err)
```

```
  return
 }
 if len(result.ModelSummaries) == 0 {
  fmt.Println("There are no foundation models.")
 }
 for _, modelSummary := range result.ModelSummaries {
  fmt.Println(*modelSummary.ModelId)
 }
}
```

- Pour plus de détails sur l'API, voir ListFoundationModelsla section Référence des AWS SDK pour Go API.

Rubriques

- Actions

Actions

`ListFoundationModels`

L'exemple de code suivant montre comment utiliser`ListFoundationModels`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Répertoriez les modèles de fondations Bedrock disponibles.

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/bedrock"
```

```
 "github.com/aws/aws-sdk-go-v2/service/bedrock/types"
)

// FoundationModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock service client that is used to perform foundation model
 actions.
type FoundationModelWrapper struct {
 BedrockClient *bedrock.Client
}



// ListPolicies lists Bedrock foundation models that you can use.
func (wrapper FoundationModelWrapper) ListFoundationModels(ctx context.Context)
 ([]types.FoundationModelSummary, error) {

 var models []types.FoundationModelSummary

 result, err := wrapper.BedrockClient.ListFoundationModels(ctx,
 &bedrock.ListFoundationModelsInput{})

 if err != nil {
  log.Printf("Couldn't list foundation models. Here's why: %v\n", err)
 } else {
  models = result.ModelSummaries
 }
 return models, err
}
```

- Pour plus de détails sur l'API, voir ListFoundationModelsla section Référence des AWS SDK pour Go API.

Exemples d'Amazon Bedrock Runtime utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants en utilisant la AWS SDK pour Go V2 avec Amazon Bedrock Runtime.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d’un même service ou combinés à d’autres Services AWS.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Amazon Bedrock

Les exemples de code suivants montrent comment commencer à utiliser Amazon Bedrock.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "encoding/json"
 "flag"
 "fmt"
 "log"
 "os"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// Each model provider defines their own individual request and response formats.
// For the format, ranges, and default values for the different models, refer to:
// https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters.html

type ClaudeRequest struct {
 Prompt            string `json:"prompt"`
 MaxTokensToSample int    `json:"max_tokens_to_sample"`
 // Omitting optional request parameters
}
```

```
type ClaudeResponse struct {
 Completion string `json:"completion"`
}

// main uses the AWS SDK for Go (v2) to create an Amazon Bedrock Runtime client
// and invokes Anthropic Claude 2 inside your account and the chosen region.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {

 region := flag.String("region", "us-east-1", "The AWS region")
 flag.Parse()

 fmt.Printf("Using AWS region: %s\n", *region)

 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx, config.WithRegion(*region))
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }

 client := bedrockruntime.NewFromConfig(sdkConfig)

 modelId := "anthropic.claude-v2"

 prompt := "Hello, how are you today?"

 // Anthropic Claude requires you to enclose the prompt as follows:
 prefix := "Human: "
 postfix := "\n\nAssistant:"
 wrappedPrompt := prefix + prompt + postfix

 request := ClaudeRequest{
  Prompt:            wrappedPrompt,
  MaxTokensToSample: 200,
 }

 body, err := json.Marshal(request)
 if err != nil {
  log.Panicln("Couldn't marshal the request: ", err)
```

```
 }

 result, err := client.InvokeModel(ctx, &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  errMsg := err.Error()
  if strings.Contains(errMsg, "no such host") {
   fmt.Printf("Error: The Bedrock service is not available in the selected
 region. Please double-check the service availability for your region at https://
aws.amazon.com/about-aws/global-infrastructure/regional-product-services/.\n")
  } else if strings.Contains(errMsg, "Could not resolve the foundation model") {
   fmt.Printf("Error: Could not resolve the foundation model from model identifier:
 \"%v\". Please verify that the requested model exists and is accessible within the
 specified region.\n", modelId)
  } else {
   fmt.Printf("Error: Couldn't invoke Anthropic Claude. Here's why: %v\n", err)
  }
  os.Exit(1)
 }

 var response ClaudeResponse

 err = json.Unmarshal(result.Body, &response)

 if err != nil {
  log.Fatal("failed to unmarshal", err)
 }
 fmt.Println("Prompt:\n", prompt)
 fmt.Println("Response from Anthropic Claude:\n", response.Completion)
}
```

- Pour plus de détails sur l'API, voir InvokeModella section Référence des AWS SDK pour Go API.

Rubriques

- Scénarios

- AI21 Laboratoires Jurassic-2
- Amazon Titan Image Generator
- Texte Amazon Titan
- Anthropic Claude

Scénarios

Invoquez plusieurs modèles de fondation sur Amazon Bedrock

L'exemple de code suivant montre comment préparer et envoyer une invite à une variété de modèles en langage large (LLMs) sur Amazon Bedrock

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Invoquez plusieurs modèles de fondations sur Amazon Bedrock.

```
import (
 "context"
 "encoding/base64"
 "fmt"
 "log"
 "math/rand"
 "os"
 "path/filepath"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/bedrock-runtime/actions"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// InvokeModelsScenario demonstrates how to use the Amazon Bedrock Runtime client
```

```
// to invoke various foundation models for text and image generation
//
// 1. Generate text with Anthropic Claude 2
// 2. Generate text with AI21 Labs Jurassic-2
// 3. Generate text with Meta Llama 2 Chat
// 4. Generate text and asynchronously process the response stream with Anthropic
 Claude 2
// 5. Generate an image with the Amazon Titan image generation model
// 6. Generate text with Amazon Titan Text G1 Express model
type InvokeModelsScenario struct {
 sdkConfig             aws.Config
 invokeModelWrapper    actions.InvokeModelWrapper
 responseStreamWrapper actions.InvokeModelWithResponseStreamWrapper
 questioner            demotools.IQuestioner
}

// NewInvokeModelsScenario constructs an InvokeModelsScenario instance from a
 configuration.
// It uses the specified config to get a Bedrock Runtime client and create wrappers
 for the
// actions used in the scenario.
func NewInvokeModelsScenario(sdkConfig aws.Config, questioner demotools.IQuestioner)
 InvokeModelsScenario {
 client := bedrockruntime.NewFromConfig(sdkConfig)
 return InvokeModelsScenario{
  sdkConfig:             sdkConfig,
  invokeModelWrapper:    actions.InvokeModelWrapper{BedrockRuntimeClient: client},
  responseStreamWrapper:
 actions.InvokeModelWithResponseStreamWrapper{BedrockRuntimeClient: client},
  questioner:            questioner,
 }
}

// Runs the interactive scenario.
func (scenario InvokeModelsScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong with the demo: %v\n", r)
  }
 }()

 log.Println(strings.Repeat("=", 77))
 log.Println("Welcome to the Amazon Bedrock Runtime model invocation demo.")
 log.Println(strings.Repeat("=", 77))
```

```
 log.Printf("First, let's invoke a few large-language models using the synchronous
 client:\n\n")

 text2textPrompt := "In one paragraph, who are you?"

 log.Println(strings.Repeat("-", 77))
 log.Printf("Invoking Claude with prompt: %v\n", text2textPrompt)
 scenario.InvokeClaude(ctx, text2textPrompt)

 log.Println(strings.Repeat("-", 77))
 log.Printf("Invoking Jurassic-2 with prompt: %v\n", text2textPrompt)
 scenario.InvokeJurassic2(ctx, text2textPrompt)

 log.Println(strings.Repeat("=", 77))
 log.Printf("Now, let's invoke Claude with the asynchronous client and process the
 response stream:\n\n")

 log.Println(strings.Repeat("-", 77))
 log.Printf("Invoking Claude with prompt: %v\n", text2textPrompt)
 scenario.InvokeWithResponseStream(ctx, text2textPrompt)

 log.Println(strings.Repeat("=", 77))
 log.Printf("Now, let's create an image with the Amazon Titan image generation
 model:\n\n")

 text2ImagePrompt := "stylized picture of a cute old steampunk robot"
 seed := rand.Int63n(2147483648)

 log.Println(strings.Repeat("-", 77))
 log.Printf("Invoking Amazon Titan with prompt: %v\n", text2ImagePrompt)
 scenario.InvokeTitanImage(ctx, text2ImagePrompt, seed)

 log.Println(strings.Repeat("-", 77))
 log.Printf("Invoking Titan Text Express with prompt: %v\n", text2textPrompt)
 scenario.InvokeTitanText(ctx, text2textPrompt)

 log.Println(strings.Repeat("=", 77))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("=", 77))
}

func (scenario InvokeModelsScenario) InvokeClaude(ctx context.Context, prompt
 string) {
```

```
 completion, err := scenario.invokeModelWrapper.InvokeClaude(ctx, prompt)
 if err != nil {
  panic(err)
 }
 log.Printf("\nClaude     : %v\n", strings.TrimSpace(completion))
}

func (scenario InvokeModelsScenario) InvokeJurassic2(ctx context.Context, prompt
 string) {
 completion, err := scenario.invokeModelWrapper.InvokeJurassic2(ctx, prompt)
 if err != nil {
  panic(err)
 }
 log.Printf("\nJurassic-2 : %v\n", strings.TrimSpace(completion))
}

func (scenario InvokeModelsScenario) InvokeWithResponseStream(ctx context.Context,
 prompt string) {
 log.Println("\nClaude with response stream:")
 _, err := scenario.responseStreamWrapper.InvokeModelWithResponseStream(ctx, prompt)
 if err != nil {
  panic(err)
 }
 log.Println()
}

func (scenario InvokeModelsScenario) InvokeTitanImage(ctx context.Context, prompt
 string, seed int64) {
 base64ImageData, err := scenario.invokeModelWrapper.InvokeTitanImage(ctx, prompt,
 seed)
 if err != nil {
  panic(err)
 }
 imagePath := saveImage(base64ImageData, "amazon.titan-image-generator-v1")
 fmt.Printf("The generated image has been saved to %s\n", imagePath)
}

func (scenario InvokeModelsScenario) InvokeTitanText(ctx context.Context, prompt
 string) {
 completion, err := scenario.invokeModelWrapper.InvokeTitanText(ctx, prompt)
 if err != nil {
  panic(err)
 }
 log.Printf("\nTitan Text Express    : %v\n\n", strings.TrimSpace(completion))
```

```
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - InvokeModel
  - InvokeModelWithResponseStream

AI21 Laboratoires Jurassic-2

InvokeModel

L'exemple de code suivant montre comment envoyer un message texte à AI21 Labs Jurassic-2 à l'aide de l'API Invoke Model.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Utilisez l'API Invoke Model pour envoyer un message texte.

```
import (
 "context"
 "encoding/json"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// InvokeModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWrapper struct {
```

```
 BedrockRuntimeClient *bedrockruntime.Client
}



// Each model provider has their own individual request and response formats.
// For the format, ranges, and default values for AI21 Labs Jurassic-2, refer to:
// https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-
jurassic2.html

type Jurassic2Request struct {
 Prompt      string  `json:"prompt"`
 MaxTokens   int     `json:"maxTokens,omitempty"`
 Temperature float64 `json:"temperature,omitempty"`
}

type Jurassic2Response struct {
 Completions []Completion `json:"completions"`
}
type Completion struct {
 Data Data `json:"data"`
}
type Data struct {
 Text string `json:"text"`
}

// Invokes AI21 Labs Jurassic-2 on Amazon Bedrock to run an inference using the
 input
// provided in the request body.
func (wrapper InvokeModelWrapper) InvokeJurassic2(ctx context.Context, prompt
 string) (string, error) {
 modelId := "ai21.j2-mid-v1"

 body, err := json.Marshal(Jurassic2Request{
  Prompt:      prompt,
  MaxTokens:   200,
  Temperature: 0.5,
 })

 if err != nil {
  log.Fatal("failed to marshal", err)
 }
```

```
 output, err := wrapper.BedrockRuntimeClient.InvokeModel(ctx,
 &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  ProcessError(err, modelId)
 }

 var response Jurassic2Response
 if err := json.Unmarshal(output.Body, &response); err != nil {
  log.Fatal("failed to unmarshal", err)
 }

 return response.Completions[0].Data.Text, nil
}
```

- Pour plus de détails sur l'API, voir InvokeModella section Référence des AWS SDK pour Go API.

Amazon Titan Image Generator

InvokeModel

L'exemple de code suivant montre comment invoquer Amazon Titan Image sur Amazon Bedrock pour générer une image.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Créez une image avec le générateur d'images Amazon Titan.

```
import (
 "context"
 "encoding/json"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// InvokeModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



type TitanImageRequest struct {
 TaskType              string                `json:"taskType"`
 TextToImageParams     TextToImageParams     `json:"textToImageParams"`
 ImageGenerationConfig ImageGenerationConfig `json:"imageGenerationConfig"`
}
type TextToImageParams struct {
 Text string `json:"text"`
}
type ImageGenerationConfig struct {
 NumberOfImages int     `json:"numberOfImages"`
 Quality        string  `json:"quality"`
 CfgScale       float64 `json:"cfgScale"`
 Height         int     `json:"height"`
 Width          int     `json:"width"`
 Seed           int64   `json:"seed"`
}

type TitanImageResponse struct {
 Images []string `json:"images"`
}

// Invokes the Titan Image model to create an image using the input provided
// in the request body.
```

```
func (wrapper InvokeModelWrapper) InvokeTitanImage(ctx context.Context, prompt
 string, seed int64) (string, error) {
 modelId := "amazon.titan-image-generator-v1"

 body, err := json.Marshal(TitanImageRequest{
  TaskType: "TEXT_IMAGE",
  TextToImageParams: TextToImageParams{
   Text: prompt,
  },
  ImageGenerationConfig: ImageGenerationConfig{
   NumberOfImages: 1,
   Quality:        "standard",
   CfgScale:       8.0,
   Height:         512,
   Width:          512,
   Seed:           seed,
  },
 })

 if err != nil {
  log.Fatal("failed to marshal", err)
 }

 output, err := wrapper.BedrockRuntimeClient.InvokeModel(ctx,
 &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  ProcessError(err, modelId)
 }

 var response TitanImageResponse
 if err := json.Unmarshal(output.Body, &response); err != nil {
  log.Fatal("failed to unmarshal", err)
 }

 base64ImageData := response.Images[0]

 return base64ImageData, nil

}
```

- Pour plus de détails sur l'API, voir InvokeModella section Référence des AWS SDK pour Go API.

Texte Amazon Titan

InvokeModel

L'exemple de code suivant montre comment envoyer un message texte à Amazon Titan Text à l'aide de l'API Invoke Model.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Utilisez l'API Invoke Model pour envoyer un message texte.

```
import (
 "context"
 "encoding/json"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// InvokeModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}
```

```
// Each model provider has their own individual request and response formats.
// For the format, ranges, and default values for Amazon Titan Text, refer to:
// https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-titan-
text.html
type TitanTextRequest struct {
 InputText            string               `json:"inputText"`
 TextGenerationConfig TextGenerationConfig `json:"textGenerationConfig"`
}

type TextGenerationConfig struct {
 Temperature   float64  `json:"temperature"`
 TopP          float64  `json:"topP"`
 MaxTokenCount int      `json:"maxTokenCount"`
 StopSequences []string `json:"stopSequences,omitempty"`
}

type TitanTextResponse struct {
 InputTextTokenCount int      `json:"inputTextTokenCount"`
 Results             []Result `json:"results"`
}

type Result struct {
 TokenCount       int    `json:"tokenCount"`
 OutputText       string `json:"outputText"`
 CompletionReason string `json:"completionReason"`
}

func (wrapper InvokeModelWrapper) InvokeTitanText(ctx context.Context, prompt
 string) (string, error) {
 modelId := "amazon.titan-text-express-v1"

 body, err := json.Marshal(TitanTextRequest{
  InputText: prompt,
  TextGenerationConfig: TextGenerationConfig{
   Temperature:   0,
   TopP:          1,
   MaxTokenCount: 4096,
  },
 })

 if err != nil {
  log.Fatal("failed to marshal", err)
 }
```

```
 output, err := wrapper.BedrockRuntimeClient.InvokeModel(ctx,
 &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  ProcessError(err, modelId)
 }

 var response TitanTextResponse
 if err := json.Unmarshal(output.Body, &response); err != nil {
  log.Fatal("failed to unmarshal", err)
 }

 return response.Results[0].OutputText, nil
}
```

- Pour plus de détails sur l'API, voir InvokeModella section Référence des AWS SDK pour Go API.

Anthropic Claude

Converse

L'exemple de code suivant montre comment envoyer un message texte à Anthropic Claude à l'aide de l'API Converse de Bedrock.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Envoyez un SMS à Anthropic Claude à l'aide de l'API Converse de Bedrock.

```
import (
 "context"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime/types"
)

// ConverseWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke Bedrock.
type ConverseWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



func (wrapper ConverseWrapper) ConverseClaude(ctx context.Context, prompt string)
 (string, error) {
 var content = types.ContentBlockMemberText{
  Value: prompt,
 }
 var message = types.Message{
  Content: []types.ContentBlock{&content},
  Role:    "user",
 }
 modelId := "anthropic.claude-3-haiku-20240307-v1:0"
 var converseInput = bedrockruntime.ConverseInput{
  ModelId:  aws.String(modelId),
  Messages: []types.Message{message},
 }
 response, err := wrapper.BedrockRuntimeClient.Converse(ctx, &converseInput)
 if err != nil {
  ProcessError(err, modelId)
 }

 responseText, _ := response.Output.(*types.ConverseOutputMemberMessage)
 responseContentBlock := responseText.Value.Content[0]
 text, _ := responseContentBlock.(*types.ContentBlockMemberText)
 return text.Value, nil

}
```

- Pour plus de détails sur l'API, consultez Converse dans le manuel AWS SDK pour Go API Reference.

InvokeModel

L'exemple de code suivant montre comment envoyer un message texte à Anthropic Claude à l'aide de l'API Invoke Model.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Invoquez le modèle de base Anthropic Claude 2 pour générer du texte.

```
import (
 "context"
 "encoding/json"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// InvokeModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



// Each model provider has their own individual request and response formats.
// For the format, ranges, and default values for Anthropic Claude, refer to:
// https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters-claude.html

type ClaudeRequest struct {
```

```
 Prompt            string   `json:"prompt"`
 MaxTokensToSample int      `json:"max_tokens_to_sample"`
 Temperature       float64  `json:"temperature,omitempty"`
 StopSequences     []string `json:"stop_sequences,omitempty"`
}

type ClaudeResponse struct {
 Completion string `json:"completion"`
}

// Invokes Anthropic Claude on Amazon Bedrock to run an inference using the input
// provided in the request body.
func (wrapper InvokeModelWrapper) InvokeClaude(ctx context.Context, prompt string)
 (string, error) {
 modelId := "anthropic.claude-v2"

 // Anthropic Claude requires enclosing the prompt as follows:
 enclosedPrompt := "Human: " + prompt + "\n\nAssistant:"

 body, err := json.Marshal(ClaudeRequest{
  Prompt:            enclosedPrompt,
  MaxTokensToSample: 200,
  Temperature:       0.5,
  StopSequences:     []string{"\n\nHuman:"},
 })

 if err != nil {
  log.Fatal("failed to marshal", err)
 }

 output, err := wrapper.BedrockRuntimeClient.InvokeModel(ctx,
 &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  ProcessError(err, modelId)
 }

 var response ClaudeResponse
 if err := json.Unmarshal(output.Body, &response); err != nil {
  log.Fatal("failed to unmarshal", err)
```

```
 }

 return response.Completion, nil
}
```

- Pour plus de détails sur l'API, voir InvokeModella section Référence des AWS SDK pour Go API.

InvokeModelWithResponseStream

L'exemple de code suivant montre comment envoyer un message texte aux modèles Anthropic Claude, à l'aide de l'API Invoke Model, et comment imprimer le flux de réponses.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Utilisez l'API Invoke Model pour envoyer un message texte et traiter le flux de réponses en temps réel.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "fmt"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime/types"
)
```

```
// InvokeModelWithResponseStreamWrapper encapsulates Amazon Bedrock actions used in
 the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWithResponseStreamWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



// Each model provider defines their own individual request and response formats.
// For the format, ranges, and default values for the different models, refer to:
// https://docs.aws.amazon.com/bedrock/latest/userguide/model-parameters.html

type Request struct {
 Prompt            string  `json:"prompt"`
 MaxTokensToSample int     `json:"max_tokens_to_sample"`
 Temperature       float64 `json:"temperature,omitempty"`
}

type Response struct {
 Completion string `json:"completion"`
}

// Invokes Anthropic Claude on Amazon Bedrock to run an inference and asynchronously
// process the response stream.

func (wrapper InvokeModelWithResponseStreamWrapper)
 InvokeModelWithResponseStream(ctx context.Context, prompt string) (string, error) {

 modelId := "anthropic.claude-v2"

 // Anthropic Claude requires you to enclose the prompt as follows:
 prefix := "Human: "
 postfix := "\n\nAssistant:"
 prompt = prefix + prompt + postfix

 request := ClaudeRequest{
  Prompt:            prompt,
  MaxTokensToSample: 200,
  Temperature:       0.5,
  StopSequences:     []string{"\n\nHuman:"},
 }

 body, err := json.Marshal(request)
```

```
 if err != nil {
  log.Panicln("Couldn't marshal the request: ", err)
 }

 output, err := wrapper.BedrockRuntimeClient.InvokeModelWithResponseStream(ctx,
 &bedrockruntime.InvokeModelWithResponseStreamInput{
  Body:        body,
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
 })

 if err != nil {
  errMsg := err.Error()
  if strings.Contains(errMsg, "no such host") {
   log.Printf("The Bedrock service is not available in the selected region. Please
 double-check the service availability for your region at https://aws.amazon.com/
about-aws/global-infrastructure/regional-product-services/.\n")
  } else if strings.Contains(errMsg, "Could not resolve the foundation model") {
   log.Printf("Could not resolve the foundation model from model identifier: \"%v
\". Please verify that the requested model exists and is accessible within the
 specified region.\n", modelId)
  } else {
   log.Printf("Couldn't invoke Anthropic Claude. Here's why: %v\n", err)
  }
 }

 resp, err := processStreamingOutput(ctx, output, func(ctx context.Context, part
 []byte) error {
  fmt.Print(string(part))
  return nil
 })

 if err != nil {
  log.Fatal("streaming output processing error: ", err)
 }

 return resp.Completion, nil

}

type StreamingOutputHandler func(ctx context.Context, part []byte) error
```

```
func processStreamingOutput(ctx context.Context, output
 *bedrockruntime.InvokeModelWithResponseStreamOutput, handler
 StreamingOutputHandler) (Response, error) {

 var combinedResult string
 resp := Response{}

 for event := range output.GetStream().Events() {
  switch v := event.(type) {
  case *types.ResponseStreamMemberChunk:

   //fmt.Println("payload", string(v.Value.Bytes))

   var resp Response
   err := json.NewDecoder(bytes.NewReader(v.Value.Bytes)).Decode(&resp)
   if err != nil {
    return resp, err
   }

   err = handler(ctx, []byte(resp.Completion))
   if err != nil {
    return resp, err
   }

   combinedResult += resp.Completion

  case *types.UnknownUnionMember:
   fmt.Println("unknown tag:", v.Tag)

  default:
   fmt.Println("union is nil or unknown type")
  }
 }

 resp.Completion = combinedResult

 return resp, nil
}
```

- Pour plus de détails sur l'API, voir InvokeModelWithResponseStreamla section Référence des AWS SDK pour Go API.

AWS CloudFormation exemples d'utilisation du SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants en utilisant la AWS SDK pour Go V2 avec AWS CloudFormation.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Actions

Actions

`DescribeStacks`

L'exemple de code suivant montre comment utiliser`DescribeStacks`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
```

```
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

- Pour plus de détails sur l'API, voir DescribeStacksla section Référence des AWS SDK pour Go API.

CloudWatch Exemples de journaux utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go version 2 avec CloudWatch journaux.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Actions

Actions

`StartLiveTail`

L'exemple de code suivant montre comment utiliser`StartLiveTail`.

Kit SDK for Go V2

Joignez les fichiers requis.

```
import (
 "context"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)
```

Gérez les événements de la session Live Tail.

```
func handleEventStreamAsync(stream *cloudwatchlogs.StartLiveTailEventStream) {
 eventsChan := stream.Events()
 for {
  event := <-eventsChan
  switch e := event.(type) {
  case *types.StartLiveTailResponseStreamMemberSessionStart:
   log.Println("Received SessionStart event")
  case *types.StartLiveTailResponseStreamMemberSessionUpdate:
   for _, logEvent := range e.Value.SessionResults {
    log.Println(*logEvent.Message)
   }
  default:
   // Handle on-stream exceptions
   if err := stream.Err(); err != nil {
    log.Fatalf("Error occured during streaming: %v", err)
   } else if event == nil {
```

```
    log.Println("Stream is Closed")
    return
   } else {
    log.Fatalf("Unknown event type: %T", e)
   }
  }
 }
}
```

Démarrez la session Live Tail.

```
cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
 panic("configuration error, " + err.Error())
}
client := cloudwatchlogs.NewFromConfig(cfg)

request := &cloudwatchlogs.StartLiveTailInput{
 LogGroupIdentifiers:   logGroupIdentifiers,
 LogStreamNames:        logStreamNames,
 LogEventFilterPattern: logEventFilterPattern,
}

response, err := client.StartLiveTail(context.TODO(), request)
// Handle pre-stream Exceptions
if err != nil {
 log.Fatalf("Failed to start streaming: %v", err)
}

// Start a Goroutine to handle events over stream
stream := response.GetStream()
go handleEventStreamAsync(stream)
```

Arrêtez la session Live Tail au bout d'un certain temps.

```
// Close the stream (which ends the session) after a timeout
time.Sleep(10 * time.Second)
stream.Close()
log.Println("Event stream closed")
```

- Pour plus de détails sur l'API, voir StartLiveTaillla section Référence des AWS SDK pour Go API.

Exemples de fournisseurs d'identité Amazon Cognito utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants en utilisant le AWS SDK pour Go V2 avec le fournisseur d'identité Amazon Cognito.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Amazon Cognito

Les exemples de code suivants montrent comment bien démarrer avec Amazon Cognito.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 cognitoClient := cognitoidentityprovider.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the user pools for your account.")
 var pools []types.UserPoolDescriptionType
 paginator := cognitoidentityprovider.NewListUserPoolsPaginator(
  cognitoClient, &cognitoidentityprovider.ListUserPoolsInput{MaxResults:
 aws.Int32(10)})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get user pools. Here's why: %v\n", err)
  } else {
   pools = append(pools, output.UserPools...)
  }
 }
 if len(pools) == 0 {
  fmt.Println("You don't have any user pools!")
 } else {
  for _, pool := range pools {
   fmt.Printf("\t%v: %v\n", *pool.Name, *pool.Id)
  }
 }
}
```

- Pour plus de détails sur l'API, voir ListUserPoolsla section Référence des AWS SDK pour Go API.

Rubriques

- Actions
- Scénarios

Actions

`AdminCreateUser`

L'exemple de code suivant montre comment utiliser`AdminCreateUser`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}
```

```
// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

- Pour plus de détails sur l'API, voir AdminCreateUserla section Référence des AWS SDK pour Go API.

`AdminSetUserPassword`

L'exemple de code suivant montre comment utiliser`AdminSetUserPassword`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

- Pour plus de détails sur l'API, voir AdminSetUserPasswordla section Référence des AWS SDK pour Go API.

`ConfirmForgotPassword`

L'exemple de code suivant montre comment utiliser`ConfirmForgotPassword`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
```

```
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}
```

- Pour plus de détails sur l'API, voir ConfirmForgotPasswordla section Référence des AWS SDK pour Go API.

`DeleteUser`

L'exemple de code suivant montre comment utiliser`DeleteUser`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
```

```
 CognitoClient *cognitoidentityprovider.Client
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteUserla section Référence des AWS SDK pour Go API.

`ForgotPassword`

L'exemple de code suivant montre comment utiliser`ForgotPassword`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
```

```
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}
```

- Pour plus de détails sur l'API, voir ForgotPasswordla section Référence des AWS SDK pour Go API.

`InitiateAuth`

L'exemple de code suivant montre comment utiliser`InitiateAuth`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}
```

- Pour plus de détails sur l'API, voir InitiateAuthla section Référence des AWS SDK pour Go API.

`ListUserPools`

L'exemple de code suivant montre comment utiliser`ListUserPools`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 cognitoClient := cognitoidentityprovider.NewFromConfig(sdkConfig)
```

```
 fmt.Println("Let's list the user pools for your account.")
 var pools []types.UserPoolDescriptionType
 paginator := cognitoidentityprovider.NewListUserPoolsPaginator(
  cognitoClient, &cognitoidentityprovider.ListUserPoolsInput{MaxResults:
 aws.Int32(10)})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get user pools. Here's why: %v\n", err)
  } else {
   pools = append(pools, output.UserPools...)
  }
 }
 if len(pools) == 0 {
  fmt.Println("You don't have any user pools!")
 } else {
  for _, pool := range pools {
   fmt.Printf("\t%v: %v\n", *pool.Name, *pool.Id)
  }
 }
}
```

- Pour plus de détails sur l'API, voir ListUserPoolsla section Référence des AWS SDK pour Go API.

`SignUp`

L'exemple de code suivant montre comment utiliser`SignUp`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
```

```
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}
```

- Pour plus de détails sur l'API, voir SignUpla section Référence des AWS SDK pour Go API.

`UpdateUserPool`

L'exemple de code suivant montre comment utiliser`UpdateUserPool`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}
```

```
// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir UpdateUserPoolla section Référence des AWS SDK pour Go API.

Scénarios

Confirmation automatique des utilisateurs connus avec une fonction Lambda

L'exemple de code suivant montre comment confirmer automatiquement les utilisateurs connus d'Amazon Cognito à l'aide d'une fonction Lambda.

- Configurez un groupe d'utilisateurs pour appeler une fonction Lambda pour le déclencheur `PreSignUp`.
- Inscription d'un utilisateur avec Amazon Cognito.
- La fonction Lambda analyse une table DynamoDB et confirme automatiquement les utilisateurs connus.
- Connectez-vous en tant que nouvel utilisateur, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// AutoConfirm separates the steps of this scenario into individual functions so
 that
```

```
// they are simpler to read and understand.
type AutoConfirm struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewAutoConfirm constructs a new auto confirm runner.
func NewAutoConfirm(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) AutoConfirm {
 scenario := AutoConfirm{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddPreSignUpTrigger adds a Lambda handler as an invocation target for the
 PreSignUp trigger.
func (runner *AutoConfirm) AddPreSignUpTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the PreSignUp trigger from
 Cognito.\n" +
  "This trigger happens when a user signs up, and lets your function take action
 before the main Cognito\n" +
  "sign up processing occurs.\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PreSignUp, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the PreSignUp
 trigger.\n",
  functionArn, userPoolId)
}

// SignUpUser signs up a user from the known user table with a password you specify.
```

```
func (runner *AutoConfirm) SignUpUser(ctx context.Context, clientId string,
 usersTable string) (string, string) {
 log.Println("Let's sign up a user to your Cognito user pool. When the user's email
 matches an email in the\n" +
  "DynamoDB known users table, it is automatically verified and the user is
 confirmed.")

 knownUsers, err := runner.helper.GetKnownUsers(ctx, usersTable)
 if err != nil {
  panic(err)
 }
 userChoice := runner.questioner.AskChoice("Which user do you want to use?\n",
 knownUsers.UserNameList())
 user := knownUsers.Users[userChoice]

 var signedUp bool
 var userConfirmed bool
 password := runner.questioner.AskPassword("Enter a password that has at least eight
 characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !signedUp {
  log.Printf("Signing up user '%v' with email '%v' to Cognito.\n", user.UserName,
 user.UserEmail)
  userConfirmed, err = runner.cognitoActor.SignUp(ctx, clientId, user.UserName,
 password, user.UserEmail)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("Enter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   signedUp = true
  }
 }
 log.Printf("User %v signed up, confirmed = %v.\n", user.UserName, userConfirmed)

 log.Println(strings.Repeat("-", 88))

 return user.UserName, password
}

// SignInUser signs in a user.
```

```
func (runner *AutoConfirm) SignInUser(ctx context.Context, clientId string, userName
 string, password string) string {
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 log.Printf("Let's sign in as %v...\n", userName)
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 log.Println(strings.Repeat("-", 88))
 return *authResult.AccessToken
}

// Run runs the scenario.
func (runner *AutoConfirm) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])

 runner.AddPreSignUpTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["AutoConfirmFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers, actions.PreSignUp)
 userName, password := runner.SignUpUser(ctx, stackOutputs["UserPoolClientId"],
 stackOutputs["TableName"])
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["AutoConfirmFunction"])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
  runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password))
```

```
 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `PreSignUp` avec une fonction Lambda.

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}
```

```
type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PreSignUp event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be confirmed and verified.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsPreSignup) (events.CognitoEventUserPoolsPreSignup,
 error) {
 log.Printf("Received presignup from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "PreSignUp_SignUp" {
  // Other trigger sources, such as PreSignUp_AdminInitiateAuth, ignore the response
 from this handler.
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserEmail: event.Request.UserAttributes["email"],
 }
 log.Printf("Looking up email %v in table %v.\n", user.UserEmail, tableName)
 output, err := h.dynamoClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key:       user.GetKey(),
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Error looking up email %v.\n", user.UserEmail)
  return event, err
 }
 if output.Item == nil {
  log.Printf("Email %v not found. Email verification is required.\n",
 user.UserEmail)
  return event, err
 }

 err = attributevalue.UnmarshalMap(output.Item, &user)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB item. Here's why: %v\n", err)
  return event, err
 }

 if user.UserName != event.UserName {
```

```
  log.Printf("UserEmail %v found, but stored UserName '%v' does not match supplied
 UserName '%v'. Verification is required.\n",
   user.UserEmail, user.UserName, event.UserName)
 } else {
  log.Printf("UserEmail %v found with matching UserName %v. User is confirmed.\n",
 user.UserEmail, user.UserName)
  event.Response.AutoConfirmUser = true
  event.Response.AutoVerifyEmail = true
 }

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)
```

```
// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}
```

```
// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
```

```
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}
```

```
// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
```

```
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
```

```
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
```

```
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
```

```
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
```

```
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
```

```
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
```

```
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
```

```
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
```

```
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - DeleteUser
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Migration automatique des utilisateurs connus avec une fonction Lambda

L'exemple de code suivant illustre comment effectuer automatiquement une migration des utilisateurs Amazon Cognito connus avec une fonction Lambda.

- Configurez un groupe d'utilisateurs pour appeler une fonction Lambda pour le déclencheur `MigrateUser`.
- Connectez-vous à Amazon Cognito avec un nom d'utilisateur et une adresse e-mail qui ne figurent pas dans le groupe d'utilisateurs.

- La fonction Lambda analyse une table DynamoDB et transfère automatiquement les utilisateurs connus vers le groupe d'utilisateurs.
- Exécutez le flux de mots de passe oubliés pour réinitialiser le mot de passe de l'utilisateur soumis à la migration.
- Connectez-vous en tant que nouvel utilisateur, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "fmt"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// MigrateUser separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type MigrateUser struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}
```

```
// NewMigrateUser constructs a new migrate user runner.
func NewMigrateUser(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) MigrateUser {
 scenario := MigrateUser{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddMigrateUserTrigger adds a Lambda handler as an invocation target for the
 MigrateUser trigger.
func (runner *MigrateUser) AddMigrateUserTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the MigrateUser trigger from
 Cognito.\n" +
  "This trigger happens when an unknown user signs in, and lets your function take
 action before Cognito\n" +
  "rejects the user.\n\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.UserMigration, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the MigrateUser
 trigger.\n",
  functionArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser adds a new user to the known users table and signs that user in to
 Amazon Cognito.
func (runner *MigrateUser) SignInUser(ctx context.Context, usersTable string,
 clientId string) (bool, actions.User) {
 log.Println("Let's sign in a user to your Cognito user pool. When the username and
 email matches an entry in the\n" +
```

```
 "DynamoDB known users table, the email is automatically verified and the user is
migrated to the Cognito user pool.")

user := actions.User{}
user.UserName = runner.questioner.Ask("\nEnter a username:")
user.UserEmail = runner.questioner.Ask("\nEnter an email that you own. This email
will be used to confirm user migration\n" +
 "during this example:")

runner.helper.AddKnownUser(ctx, usersTable, user)

var err error
var resetRequired *types.PasswordResetRequiredException
var authResult *types.AuthenticationResultType
signedIn := false
for !signedIn && resetRequired == nil {
 log.Printf("Signing in to Cognito as user '%v'. The expected result is a
PasswordResetRequiredException.\n\n", user.UserName)
 authResult, err = runner.cognitoActor.SignIn(ctx, clientId, user.UserName, "_")
 if err != nil {
  if errors.As(err, &resetRequired) {
   log.Printf("\nUser '%v' is not in the Cognito user pool but was found in the
DynamoDB known users table.\n"+
    "User migration is started and a password reset is required.", user.UserName)
  } else {
   panic(err)
  }
 } else {
  log.Printf("User '%v' successfully signed in. This is unexpected and probably
means you have not\n"+
   "cleaned up a previous run of this scenario, so the user exist in the Cognito
user pool.\n"+
   "You can continue this example and select to clean up resources, or manually
remove\n"+
   "the user from your user pool and try again.", user.UserName)
  runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
*authResult.AccessToken)
  signedIn = true
 }
}

log.Println(strings.Repeat("-", 88))
return resetRequired != nil, user
}
```

```
// ResetPassword starts a password recovery flow.
func (runner *MigrateUser) ResetPassword(ctx context.Context, clientId string, user
 actions.User) {
 wantCode := runner.questioner.AskBool(fmt.Sprintf("In order to migrate the user to
 Cognito, you must be able to receive a confirmation\n"+
  "code by email at %v. Do you want to send a code (y/n)?", user.UserEmail), "y")
 if !wantCode {
  log.Println("To complete this example and successfully migrate a user to Cognito,
 you must enter an email\n" +
   "you own that can receive a confirmation code.")
  return
 }
 codeDelivery, err := runner.cognitoActor.ForgotPassword(ctx, clientId,
 user.UserName)
 if err != nil {
  panic(err)
 }
 log.Printf("\nA confirmation code has been sent to %v.", *codeDelivery.Destination)
 code := runner.questioner.Ask("Check your email and enter it here:")

 confirmed := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !confirmed {
  log.Printf("\nConfirming password reset for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.ConfirmForgotPassword(ctx, clientId, code,
 user.UserName, password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   confirmed = true
  }
 }
 log.Printf("User '%v' successfully confirmed and migrated.\n", user.UserName)
 log.Println("Signing in with your username and password...")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, user.UserName,
 password)
```

```
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)

 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *MigrateUser) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]

 runner.AddMigrateUserTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["MigrateUserFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers,
 actions.UserMigration)
 resetNeeded, user := runner.SignInUser(ctx, stackOutputs["TableName"],
 stackOutputs["UserPoolClientId"])
 if resetNeeded {
  runner.helper.ListRecentLogEvents(ctx, stackOutputs["MigrateUserFunction"])
  runner.ResetPassword(ctx, stackOutputs["UserPoolClientId"], user)
 }

 runner.resources.Cleanup(ctx)
```

```
 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `MigrateUser` avec une fonction Lambda.

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the MigrateUser event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be migrated to the user pool.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsMigrateUser) (events.CognitoEventUserPoolsMigrateUser,
 error) {
```

```
log.Printf("Received migrate trigger from %v for user '%v'", event.TriggerSource,
event.UserName)
if event.TriggerSource != "UserMigration_Authentication" {
 return event, nil
}
tableName := os.Getenv(TABLE_NAME)
user := UserInfo{
 UserName: event.UserName,
}
log.Printf("Looking up user '%v' in table %v.\n", user.UserName, tableName)
filterEx := expression.Name("UserName").Equal(expression.Value(user.UserName))
expr, err := expression.NewBuilder().WithFilter(filterEx).Build()
if err != nil {
 log.Printf("Error building expression to query for user '%v'.\n", user.UserName)
 return event, err
}
output, err := h.dynamoClient.Scan(ctx, &dynamodb.ScanInput{
 TableName:                 aws.String(tableName),
 FilterExpression:          expr.Filter(),
 ExpressionAttributeNames:  expr.Names(),
 ExpressionAttributeValues: expr.Values(),
})
if err != nil {
 log.Printf("Error looking up user '%v'.\n", user.UserName)
 return event, err
}
if len(output.Items) == 0 {
 log.Printf("User '%v' not found, not migrating user.\n", user.UserName)
 return event, err
}

var users []UserInfo
err = attributevalue.UnmarshalListOfMaps(output.Items, &users)
if err != nil {
 log.Printf("Couldn't unmarshal DynamoDB items. Here's why: %v\n", err)
 return event, err
}

user = users[0]
log.Printf("UserName '%v' found with email %v. User is migrated and must reset
password.\n", user.UserName, user.UserEmail)
event.CognitoEventUserPoolsMigrateUserResponse.UserAttributes = map[string]string{
 "email":          user.UserEmail,
```

```
  "email_verified": "true", // email_verified is required for the forgot password
 flow.
 }
 event.CognitoEventUserPoolsMigrateUserResponse.FinalUserStatus = "RESET_REQUIRED"
 event.CognitoEventUserPoolsMigrateUserResponse.MessageAction = "SUPPRESS"

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
```

```
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
```

```
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
```

```
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int
```

```
const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
```

```
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
```

```
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
```

```
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
```

```
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
```

```
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
```

```
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
```

```
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)
```

```
// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
```

```
    triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
  nil}
   }
   err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
  triggerList...)
   if err != nil {
    log.Println("Couldn't update Cognito triggers during cleanup.")
    panic(err)
   }
   log.Println("Removed Cognito triggers from user pool.")
  } else {
   log.Println("Be sure to remove resources when you're done with them to avoid
  unexpected charges!")
  }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - ConfirmForgotPassword
  - DeleteUser
  - ForgotPassword
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Rédaction de données d’activité personnalisées à l’aide d’une fonction Lambda après authentification de l’utilisateur Amazon Cognito

L’exemple de code suivant illustre comment écrire des données d’activité personnalisées avec une fonction Lambda après l’authentification utilisateur Amazon Cognito.

- Utilisez les fonctions d’administrateur pour ajouter un utilisateur à un groupe d’utilisateurs.
- Configurez un groupe d’utilisateurs pour appeler une fonction Lambda pour le déclencheur `PostAuthentication`.
- Inscrivez le nouvel utilisateur dans Amazon Cognito.

- La fonction Lambda écrit des informations personnalisées dans des CloudWatch journaux et dans une table DynamoDB.
- Obtenez et affichez les données personnalisées à partir de la table DynamoDB, puis nettoyer les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ActivityLog separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ActivityLog struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewActivityLog constructs a new activity log runner.
```

```
func NewActivityLog(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) ActivityLog {
 scenario := ActivityLog{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddUserToPool selects a user from the known users table and uses administrator
 credentials to add the user to the user pool.
func (runner *ActivityLog) AddUserToPool(ctx context.Context, userPoolId string,
 tableName string) (string, string) {
 log.Println("To facilitate this example, let's add a user to the user pool using
 administrator privileges.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 user := users.Users[0]
 log.Printf("Adding known user %v to the user pool.\n", user.UserName)
 err = runner.cognitoActor.AdminCreateUser(ctx, userPoolId, user.UserName,
 user.UserEmail)
 if err != nil {
  panic(err)
 }
 pwSet := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !pwSet {
  log.Printf("\nSetting password for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.AdminSetUserPassword(ctx, userPoolId, user.UserName,
 password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
```

```
   }
  } else {
   pwSet = true
  }
 }

 log.Println(strings.Repeat("-", 88))

 return user.UserName, password
}

// AddActivityLogTrigger adds a Lambda handler as an invocation target for the
 PostAuthentication trigger.
func (runner *ActivityLog) AddActivityLogTrigger(ctx context.Context, userPoolId
 string, activityLogArn string) {
 log.Println("Let's add a Lambda function to handle the PostAuthentication trigger
 from Cognito.\n" +
  "This trigger happens after a user is authenticated, and lets your function take
 action, such as logging\n" +
  "the outcome.")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PostAuthentication, HandlerArn:
 aws.String(activityLogArn)})
 if err != nil {
  panic(err)
 }
 runner.resources.triggers = append(runner.resources.triggers,
 actions.PostAuthentication)
 log.Printf("Lambda function %v added to user pool %v to handle PostAuthentication
 Cognito trigger.\n",
  activityLogArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser signs in as the specified user.
func (runner *ActivityLog) SignInUser(ctx context.Context, clientId string, userName
 string, password string) {
 log.Printf("Now we'll sign in user %v and check the results in the logs and the
 DynamoDB table.", userName)
 runner.questioner.Ask("Press Enter when you're ready.")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
```

```
  panic(err)
 }
 log.Println("Sign in successful.",
  "The PostAuthentication Lambda handler writes custom information to CloudWatch
 Logs.")

 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
}

// GetKnownUserLastLogin gets the login info for a user from the Amazon DynamoDB
 table and displays it.
func (runner *ActivityLog) GetKnownUserLastLogin(ctx context.Context, tableName
 string, userName string) {
 log.Println("The PostAuthentication handler also writes login data to the DynamoDB
 table.")
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 for _, user := range users.Users {
  if user.UserName == userName {
   log.Println("The last login info for the user in the known users table is:")
   log.Printf("\t%+v", *user.LastLogin)
  }
 }
 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *ActivityLog) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))
```

```
 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])
 userName, password := runner.AddUserToPool(ctx, stackOutputs["UserPoolId"],
 stackOutputs["TableName"])

 runner.AddActivityLogTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["ActivityLogFunctionArn"])
 runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password)
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["ActivityLogFunction"])
 runner.GetKnownUserLastLogin(ctx, stackOutputs["TableName"], userName)

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `PostAuthentication` avec une fonction Lambda.

```
import (
 "context"
 "fmt"
 "log"
 "os"
 "time"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
const TABLE_NAME = "TABLE_NAME"

// LoginInfo defines structured login data that can be marshalled to a DynamoDB
 format.
type LoginInfo struct {
 UserPoolId string `dynamodbav:"UserPoolId"`
 ClientId   string `dynamodbav:"ClientId"`
 Time       string `dynamodbav:"Time"`
}

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string    `dynamodbav:"UserName"`
 UserEmail string    `dynamodbav:"UserEmail"`
 LastLogin LoginInfo `dynamodbav:"LastLogin"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PostAuthentication event by writing custom data to the
 logs and
// to an Amazon DynamoDB table.
func (h *handler) HandleRequest(ctx context.Context,
 event events.CognitoEventUserPoolsPostAuthentication)
 (events.CognitoEventUserPoolsPostAuthentication, error) {
 log.Printf("Received post authentication trigger from %v for user '%v'",
 event.TriggerSource, event.UserName)
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName:  event.UserName,
  UserEmail: event.Request.UserAttributes["email"],
  LastLogin: LoginInfo{
```

```
    UserPoolId: event.UserPoolID,
    ClientId:   event.CallerContext.ClientID,
    Time:       time.Now().Format(time.UnixDate),
   },
  }
  // Write to CloudWatch Logs.
  fmt.Printf("%#v", user)

  // Also write to an external system. This examples uses DynamoDB to demonstrate.
  userMap, err := attributevalue.MarshalMap(user)
  if err != nil {
   log.Printf("Couldn't marshal to DynamoDB map. Here's why: %v\n", err)
  } else if len(userMap) == 0 {
   log.Printf("User info marshaled to an empty map.")
  } else {
   _, err := h.dynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
    Item:      userMap,
    TableName: aws.String(tableName),
   })
   if err != nil {
    log.Printf("Couldn't write to DynamoDB. Here's why: %v\n", err)
   } else {
    log.Printf("Wrote user info to DynamoDB table %v.\n", tableName)
   }
  }

  return event, nil
}

func main() {
  ctx := context.Background()
  sdkConfig, err := config.LoadDefaultConfig(ctx)
  if err != nil {
   log.Panicln(err)
  }
  h := handler{
   dynamoClient: dynamodb.NewFromConfig(sdkConfig),
  }
  lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
```

```
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
```

```
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
```

```
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
```

```
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
```

```
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
```

```
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
```

```
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
```

```
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
```

```
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
```

```
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
```

```
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
```

```
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
```

```
    log.Printf("Something went wrong during cleanup.\n%v\n", r)
    log.Println("Use the AWS Management Console to remove any remaining resources \n"
  +
     "that were created for this scenario.")
   }
  }()

  wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
  resources that were created "+
   "during this demo (y/n)?", "y")
  if wantDelete {
   for _, accessToken := range resources.userAccessTokens {
    err := resources.cognitoActor.DeleteUser(ctx, accessToken)
    if err != nil {
     log.Println("Couldn't delete user during cleanup.")
     panic(err)
    }
    log.Println("Deleted user.")
   }
   triggerList := make([]actions.TriggerInfo, len(resources.triggers))
   for i := 0; i < len(resources.triggers); i++ {
    triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
  nil}
   }
   err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
  triggerList...)
   if err != nil {
    log.Println("Couldn't update Cognito triggers during cleanup.")
    panic(err)
   }
   log.Println("Removed Cognito triggers from user pool.")
  } else {
   log.Println("Be sure to remove resources when you're done with them to avoid
  unexpected charges!")
  }
 }
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - AdminCreateUser

- AdminSetUserPassword
- DeleteUser
- InitiateAuth
- UpdateUserPool

Exemples d'Amazon DocumentDB utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon DocumentDB.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Exemples sans serveur

Exemples sans serveur

Invocation d’une fonction Lambda à partir d’un déclencheur Amazon DocumentDB

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements provenant d'un flux de modifications DocumentDB. La fonction récupère les données utiles DocumentDB et journalise le contenu de l’enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l’exemple complet et découvrez comment le configurer et l’exécuter dans le référentiel d’exemples sans serveur.

Consommation d’un événement Amazon DocumentDB avec Lambda en utilisant Go.

```
package main
```

```
import (
 "context"
 "encoding/json"
 "fmt"

 "github.com/aws/aws-lambda-go/lambda"
)

type Event struct {
 Events []Record `json:"events"`
}

type Record struct {
 Event struct {
  OperationType string `json:"operationType"`
  NS            struct {
   DB   string `json:"db"`
   Coll string `json:"coll"`
  } `json:"ns"`
  FullDocument interface{} `json:"fullDocument"`
 } `json:"event"`
}

func main() {
 lambda.Start(handler)
}

func handler(ctx context.Context, event Event) (string, error) {
 fmt.Println("Loading function")
 for _, record := range event.Events {
  logDocumentDBEvent(record)
 }

 return "OK", nil
}

func logDocumentDBEvent(record Record) {
 fmt.Printf("Operation type: %s\n", record.Event.OperationType)
 fmt.Printf("db: %s\n", record.Event.NS.DB)
 fmt.Printf("collection: %s\n", record.Event.NS.Coll)
 docBytes, _ := json.MarshalIndent(record.Event.FullDocument, "", "  ")
 fmt.Printf("Full document: %s\n", string(docBytes))
}
```

Exemples DynamoDB utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec DynamoDB.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

AWS les contributions communautaires sont des exemples qui ont été créés et sont maintenus par plusieurs équipes AWS. Pour fournir des commentaires, utilisez le mécanisme fourni dans les référentiels liés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Principes de base
- Actions
- Scénarios
- Exemples sans serveur
- AWS contributions communautaires

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- Créez une table pouvant contenir des données vidéo.
- Insérer, récupérez et mettez à jour un seul film dans la table.
- Écrivez des données vidéo dans la table à partir d'un exemple de fichier JSON.
- Recherchez les films sortis au cours d'une année donnée.
- Recherchez les films sortis au cours d'une plage d'années spécifique.
- Supprimez un film de la table, puis supprimez la table.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif pour créer la table et effectuer des actions dessus.

```
import (
 "context"
 "fmt"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)

// RunMovieScenario is an interactive example that shows you how to use the AWS SDK
 for Go
// to create and use an Amazon DynamoDB table that stores data about movies.
//
//  1. Create a table that can hold movie data.
//  2. Put, get, and update a single movie in the table.
//  3. Write movie data to the table from a sample JSON file.
//  4. Query for movies that were released in a given year.
//  5. Scan for movies that were released in a range of years.
//  6. Delete a movie from the table.
```

```
//  7. Delete the table.
//
// This example creates a DynamoDB service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
//
// The specified movie sampler is used to get sample data from a URL that is loaded
// into the named table.
func RunMovieScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner,
 tableName string,
 movieSampler actions.IMovieSampler) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon DynamoDB getting started demo.")
 log.Println(strings.Repeat("-", 88))

 tableBasics := actions.TableBasics{TableName: tableName,
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig)}

 exists, err := tableBasics.TableExists(ctx)
 if err != nil {
  panic(err)
 }
 if !exists {
  log.Printf("Creating table %v...\n", tableName)
  _, err = tableBasics.CreateMovieTable(ctx)
  if err != nil {
   panic(err)
  } else {
   log.Printf("Created table %v.\n", tableName)
  }
 } else {
  log.Printf("Table %v already exists.\n", tableName)
 }
```

```
var customMovie actions.Movie
customMovie.Title = questioner.Ask("Enter a movie title to add to the table:",
 demotools.NotEmpty{})
customMovie.Year = questioner.AskInt("What year was it released?",
 demotools.NotEmpty{}, demotools.InIntRange{Lower: 1900, Upper: 2030})
customMovie.Info = map[string]interface{}{}
customMovie.Info["rating"] = questioner.AskFloat64(
 "Enter a rating between 1 and 10:",
 demotools.NotEmpty{}, demotools.InFloatRange{Lower: 1, Upper: 10})
customMovie.Info["plot"] = questioner.Ask("What's the plot? ",
 demotools.NotEmpty{})
err = tableBasics.AddMovie(ctx, customMovie)
if err == nil {
 log.Printf("Added %v to the movie table.\n", customMovie.Title)
}
log.Println(strings.Repeat("-", 88))

log.Printf("Let's update your movie. You previously rated it %v.\n",
customMovie.Info["rating"])
customMovie.Info["rating"] = questioner.AskFloat64(
 "What new rating would you give it?",
 demotools.NotEmpty{}, demotools.InFloatRange{Lower: 1, Upper: 10})
log.Printf("You summarized the plot as '%v'.\n", customMovie.Info["plot"])
customMovie.Info["plot"] = questioner.Ask("What would you say now?",
 demotools.NotEmpty{})
attributes, err := tableBasics.UpdateMovie(ctx, customMovie)
if err == nil {
 log.Printf("Updated %v with new values.\n", customMovie.Title)
 for _, attVal := range attributes {
  for valKey, val := range attVal {
   log.Printf("\t%v: %v\n", valKey, val)
  }
 }
}
log.Println(strings.Repeat("-", 88))

log.Printf("Getting movie data from %v and adding 250 movies to the table...\n",
 movieSampler.GetURL())
movies := movieSampler.GetSampleMovies()
written, err := tableBasics.AddMovieBatch(ctx, movies, 250)
if err != nil {
 panic(err)
} else {
```

```
 log.Printf("Added %v movies to the table.\n", written)
}

show := 10
if show > written {
 show = written
}
log.Printf("The first %v movies in the table are:", show)
for index, movie := range movies[:show] {
 log.Printf("\t%v. %v\n", index+1, movie.Title)
}
movieIndex := questioner.AskInt(
 "Enter the number of a movie to get info about it: ",
 demotools.InIntRange{Lower: 1, Upper: show},
)
movie, err := tableBasics.GetMovie(ctx, movies[movieIndex-1].Title,
movies[movieIndex-1].Year)
if err == nil {
 log.Println(movie)
}
log.Println(strings.Repeat("-", 88))

log.Println("Let's get a list of movies released in a given year.")
releaseYear := questioner.AskInt("Enter a year between 1972 and 2018: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018},
)
releases, err := tableBasics.Query(ctx, releaseYear)
if err == nil {
 if len(releases) == 0 {
  log.Printf("I couldn't find any movies released in %v!\n", releaseYear)
 } else {
  for _, movie = range releases {
   log.Println(movie)
  }
 }
}
log.Println(strings.Repeat("-", 88))

log.Println("Now let's scan for movies released in a range of years.")
startYear := questioner.AskInt("Enter a year: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018})
endYear := questioner.AskInt("Enter another year: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018})
releases, err = tableBasics.Scan(ctx, startYear, endYear)
```

```
if err == nil {
 if len(releases) == 0 {
  log.Printf("I couldn't find any movies released between %v and %v!\n", startYear,
endYear)
 } else {
  log.Printf("Found %v movies. In this list, the plot is <nil> because "+
   "we used a projection expression when scanning for items to return only "+
   "the title, year, and rating.\n", len(releases))
  for _, movie = range releases {
   log.Println(movie)
  }
 }
}
log.Println(strings.Repeat("-", 88))

var tables []string
if questioner.AskBool("Do you want to list all of your tables? (y/n) ", "y") {
 tables, err = tableBasics.ListTables(ctx)
 if err == nil {
  log.Printf("Found %v tables:", len(tables))
  for _, table := range tables {
   log.Printf("\t%v", table)
  }
 }
}
log.Println(strings.Repeat("-", 88))

log.Printf("Let's remove your movie '%v'.\n", customMovie.Title)
if questioner.AskBool("Do you want to delete it from the table? (y/n) ", "y") {
 err = tableBasics.DeleteMovie(ctx, customMovie)
}
if err == nil {
 log.Printf("Deleted %v.\n", customMovie.Title)
}

if questioner.AskBool("Delete the table, too? (y/n)", "y") {
 err = tableBasics.DeleteTable(ctx)
} else {
 log.Println("Don't forget to delete the table when you're done or you might " +
  "incur charges on your account.")
}
if err == nil {
 log.Printf("Deleted table %v.\n", tableBasics.TableName)
}
```

```
 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
```

```
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

Créez une structure et des méthodes qui appellent des actions DynamoDB.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// TableExists determines whether a DynamoDB table exists.
func (basics TableBasics) TableExists(ctx context.Context) (bool, error) {
```

```
 exists := true
 _, err := basics.DynamoDbClient.DescribeTable(
  ctx, &dynamodb.DescribeTableInput{TableName: aws.String(basics.TableName)},
 )
 if err != nil {
  var notFoundEx *types.ResourceNotFoundException
  if errors.As(err, &notFoundEx) {
   log.Printf("Table %v does not exist.\n", basics.TableName)
   err = nil
  } else {
   log.Printf("Couldn't determine existence of table %v. Here's why: %v\n",
 basics.TableName, err)
  }
  exists = false
 }
 return exists, err
}



// CreateMovieTable creates a DynamoDB table with a composite primary key defined as
// a string sort key named `title`, and a numeric partition key named `year`.
// This function uses NewTableExistsWaiter to wait for the table to be created by
// DynamoDB before it returns.
func (basics TableBasics) CreateMovieTable(ctx context.Context)
 (*types.TableDescription, error) {
 var tableDesc *types.TableDescription
 table, err := basics.DynamoDbClient.CreateTable(ctx, &dynamodb.CreateTableInput{
  AttributeDefinitions: []types.AttributeDefinition{{
   AttributeName: aws.String("year"),
   AttributeType: types.ScalarAttributeTypeN,
  }, {
   AttributeName: aws.String("title"),
   AttributeType: types.ScalarAttributeTypeS,
  }},
  KeySchema: []types.KeySchemaElement{{
   AttributeName: aws.String("year"),
   KeyType:       types.KeyTypeHash,
  }, {
   AttributeName: aws.String("title"),
   KeyType:       types.KeyTypeRange,
  }},
  TableName:   aws.String(basics.TableName),
  BillingMode: types.BillingModePayPerRequest,
```

```
 })
 if err != nil {
  log.Printf("Couldn't create table %v. Here's why: %v\n", basics.TableName, err)
 } else {
  waiter := dynamodb.NewTableExistsWaiter(basics.DynamoDbClient)
  err = waiter.Wait(ctx, &dynamodb.DescribeTableInput{
   TableName: aws.String(basics.TableName)}, 5*time.Minute)
  if err != nil {
   log.Printf("Wait for table exists failed. Here's why: %v\n", err)
  }
  tableDesc = table.TableDescription
  log.Printf("Ccreating table test")
 }
 return tableDesc, err
}



// ListTables lists the DynamoDB table names for the current account.
func (basics TableBasics) ListTables(ctx context.Context) ([]string, error) {
 var tableNames []string
 var output *dynamodb.ListTablesOutput
 var err error
 tablePaginator := dynamodb.NewListTablesPaginator(basics.DynamoDbClient,
 &dynamodb.ListTablesInput{})
 for tablePaginator.HasMorePages() {
  output, err = tablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't list tables. Here's why: %v\n", err)
   break
  } else {
   tableNames = append(tableNames, output.TableNames...)
  }
 }
 return tableNames, err
}



// AddMovie adds a movie the DynamoDB table.
func (basics TableBasics) AddMovie(ctx context.Context, movie Movie) error {
 item, err := attributevalue.MarshalMap(movie)
 if err != nil {
  panic(err)
```

```
 }
 _, err = basics.DynamoDbClient.PutItem(ctx, &dynamodb.PutItemInput{
  TableName: aws.String(basics.TableName), Item: item,
 })
 if err != nil {
  log.Printf("Couldn't add item to table. Here's why: %v\n", err)
 }
 return err
}



// UpdateMovie updates the rating and plot of a movie that already exists in the
// DynamoDB table. This function uses the `expression` package to build the update
// expression.
func (basics TableBasics) UpdateMovie(ctx context.Context, movie Movie)
 (map[string]map[string]interface{}, error) {
 var err error
 var response *dynamodb.UpdateItemOutput
 var attributeMap map[string]map[string]interface{}
 update := expression.Set(expression.Name("info.rating"),
 expression.Value(movie.Info["rating"]))
 update.Set(expression.Name("info.plot"), expression.Value(movie.Info["plot"]))
 expr, err := expression.NewBuilder().WithUpdate(update).Build()
 if err != nil {
  log.Printf("Couldn't build expression for update. Here's why: %v\n", err)
 } else {
  response, err = basics.DynamoDbClient.UpdateItem(ctx, &dynamodb.UpdateItemInput{
   TableName:                 aws.String(basics.TableName),
   Key:                       movie.GetKey(),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   UpdateExpression:          expr.Update(),
   ReturnValues:              types.ReturnValueUpdatedNew,
  })
  if err != nil {
   log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
  } else {
   err = attributevalue.UnmarshalMap(response.Attributes, &attributeMap)
   if err != nil {
    log.Printf("Couldn't unmarshall update response. Here's why: %v\n", err)
   }
  }
 }
```

```
 return attributeMap, err
}



// AddMovieBatch adds a slice of movies to the DynamoDB table. The function sends
// batches of 25 movies to DynamoDB until all movies are added or it reaches the
// specified maximum.
func (basics TableBasics) AddMovieBatch(ctx context.Context, movies []Movie,
 maxMovies int) (int, error) {
 var err error
 var item map[string]types.AttributeValue
 written := 0
 batchSize := 25 // DynamoDB allows a maximum batch size of 25 items.
 start := 0
 end := start + batchSize
 for start < maxMovies && start < len(movies) {
  var writeReqs []types.WriteRequest
  if end > len(movies) {
   end = len(movies)
  }
  for _, movie := range movies[start:end] {
   item, err = attributevalue.MarshalMap(movie)
   if err != nil {
    log.Printf("Couldn't marshal movie %v for batch writing. Here's why: %v\n",
 movie.Title, err)
   } else {
    writeReqs = append(
     writeReqs,
     types.WriteRequest{PutRequest: &types.PutRequest{Item: item}},
    )
   }
  }
  _, err = basics.DynamoDbClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
   RequestItems: map[string][]types.WriteRequest{basics.TableName: writeReqs}})
  if err != nil {
   log.Printf("Couldn't add a batch of movies to %v. Here's why: %v\n",
 basics.TableName, err)
  } else {
   written += len(writeReqs)
  }
  start = end
  end += batchSize
 }
```

```
 return written, err
}



// GetMovie gets movie data from the DynamoDB table by using the primary composite
 key
// made of title and year.
func (basics TableBasics) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 movie := Movie{Title: title, Year: year}
 response, err := basics.DynamoDbClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key: movie.GetKey(), TableName: aws.String(basics.TableName),
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Item, &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}



// Query gets all movies in the DynamoDB table that were released in the specified
 year.
// The function uses the `expression` package to build the key condition expression
// that is used in the query.
func (basics TableBasics) Query(ctx context.Context, releaseYear int) ([]Movie,
 error) {
 var err error
 var response *dynamodb.QueryOutput
 var movies []Movie
 keyEx := expression.Key("year").Equal(expression.Value(releaseYear))
 expr, err := expression.NewBuilder().WithKeyCondition(keyEx).Build()
 if err != nil {
  log.Printf("Couldn't build expression for query. Here's why: %v\n", err)
 } else {
  queryPaginator := dynamodb.NewQueryPaginator(basics.DynamoDbClient,
 &dynamodb.QueryInput{
```

```
    TableName:                 aws.String(basics.TableName),
    ExpressionAttributeNames:  expr.Names(),
    ExpressionAttributeValues: expr.Values(),
    KeyConditionExpression:    expr.KeyCondition(),
   })
   for queryPaginator.HasMorePages() {
    response, err = queryPaginator.NextPage(ctx)
    if err != nil {
     log.Printf("Couldn't query for movies released in %v. Here's why: %v\n",
  releaseYear, err)
     break
    } else {
     var moviePage []Movie
     err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
     if err != nil {
      log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
      break
     } else {
      movies = append(movies, moviePage...)
     }
    }
   }
  }
  return movies, err
}



// Scan gets all movies in the DynamoDB table that were released in a range of years
// and projects them to return a reduced set of fields.
// The function uses the `expression` package to build the filter and projection
// expressions.
func (basics TableBasics) Scan(ctx context.Context, startYear int, endYear int)
 ([]Movie, error) {
 var movies []Movie
 var err error
 var response *dynamodb.ScanOutput
 filtEx := expression.Name("year").Between(expression.Value(startYear),
 expression.Value(endYear))
 projEx := expression.NamesList(
  expression.Name("year"), expression.Name("title"), expression.Name("info.rating"))
 expr, err :=
 expression.NewBuilder().WithFilter(filtEx).WithProjection(projEx).Build()
 if err != nil {
```

```
  log.Printf("Couldn't build expressions for scan. Here's why: %v\n", err)
 } else {
  scanPaginator := dynamodb.NewScanPaginator(basics.DynamoDbClient,
 &dynamodb.ScanInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   FilterExpression:          expr.Filter(),
   ProjectionExpression:      expr.Projection(),
  })
  for scanPaginator.HasMorePages() {
   response, err = scanPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't scan for movies released between %v and %v. Here's why: %v
\n",
     startYear, endYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}



// DeleteMovie removes a movie from the DynamoDB table.
func (basics TableBasics) DeleteMovie(ctx context.Context, movie Movie) error {
 _, err := basics.DynamoDbClient.DeleteItem(ctx, &dynamodb.DeleteItemInput{
  TableName: aws.String(basics.TableName), Key: movie.GetKey(),
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
```

```
}



// DeleteTable deletes the DynamoDB table and all of its data.
func (basics TableBasics) DeleteTable(ctx context.Context) error {
 _, err := basics.DynamoDbClient.DeleteTable(ctx, &dynamodb.DeleteTableInput{
  TableName: aws.String(basics.TableName)})
 if err != nil {
  log.Printf("Couldn't delete table %v. Here's why: %v\n", basics.TableName, err)
 }
 return err
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - BatchWriteItem
  - CreateTable
  - DeleteItem
  - DeleteTable
  - DescribeTable
  - GetItem
  - PutItem
  - Interrogation
  - Analyser
  - UpdateItem

Actions

`BatchExecuteStatement`

L'exemple de code suivant montre comment utiliser`BatchExecuteStatement`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Définissez une structure de réception de fonctions pour l'exemple.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

Utilisez des lots d'instructions INSERT pour ajouter des éléments.

```
// AddMovieBatch runs a batch of PartiQL INSERT statements to add multiple movies to
 the
// DynamoDB table.
func (runner PartiQLRunner) AddMovieBatch(ctx context.Context, movies []Movie) error
 {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
```

```
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(fmt.Sprintf(
    "INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't insert a batch of items with PartiQL. Here's why: %v\n", err)
 }
 return err
}
```

Utilisez des lots d'instructions SELECT pour obtenir des éléments.

```
// GetMovieBatch runs a batch of PartiQL SELECT statements to get multiple movies
 from
// the DynamoDB table by title and year.
func (runner PartiQLRunner) GetMovieBatch(ctx context.Context, movies []Movie)
 ([]Movie, error) {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
```

```
   Parameters: params,
  }
 }

 output, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 var outMovies []Movie
 if err != nil {
  log.Printf("Couldn't get a batch of items with PartiQL. Here's why: %v\n", err)
 } else {
  for _, response := range output.Responses {
   var movie Movie
   err = attributevalue.UnmarshalMap(response.Item, &movie)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    outMovies = append(outMovies, movie)
   }
  }
 }
 return outMovies, err
}
```

Utilisez des lots d'instructions UPDATE pour mettre à jour des éléments.

```
// UpdateMovieBatch runs a batch of PartiQL UPDATE statements to update the rating
 of
// multiple movies that already exist in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovieBatch(ctx context.Context, movies []Movie,
 ratings []float64) error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{ratings[index],
 movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
```

```
   Statement: aws.String(
    fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't update the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

Utilisez des lots d'instructions DELETE pour supprimer des éléments.

```
// DeleteMovieBatch runs a batch of PartiQL DELETE statements to remove multiple
 movies
// from the DynamoDB table.
func (runner PartiQLRunner) DeleteMovieBatch(ctx context.Context, movies []Movie)
 error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
```

```
 })
 if err != nil {
  log.Printf("Couldn't delete the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
```

```
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir BatchExecuteStatementla section Référence des AWS SDK pour Go API.

`BatchWriteItem`

L'exemple de code suivant montre comment utiliser`BatchWriteItem`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
```

```
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovieBatch adds a slice of movies to the DynamoDB table. The function sends
// batches of 25 movies to DynamoDB until all movies are added or it reaches the
// specified maximum.
func (basics TableBasics) AddMovieBatch(ctx context.Context, movies []Movie,
 maxMovies int) (int, error) {
 var err error
 var item map[string]types.AttributeValue
 written := 0
 batchSize := 25 // DynamoDB allows a maximum batch size of 25 items.
 start := 0
 end := start + batchSize
 for start < maxMovies && start < len(movies) {
  var writeReqs []types.WriteRequest
  if end > len(movies) {
   end = len(movies)
  }
  for _, movie := range movies[start:end] {
   item, err = attributevalue.MarshalMap(movie)
   if err != nil {
    log.Printf("Couldn't marshal movie %v for batch writing. Here's why: %v\n",
 movie.Title, err)
   } else {
    writeReqs = append(
     writeReqs,
     types.WriteRequest{PutRequest: &types.PutRequest{Item: item}},
    )
   }
  }
  _, err = basics.DynamoDbClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
   RequestItems: map[string][]types.WriteRequest{basics.TableName: writeReqs}})
```

```
  if err != nil {
   log.Printf("Couldn't add a batch of movies to %v. Here's why: %v\n",
 basics.TableName, err)
  } else {
   written += len(writeReqs)
  }
  start = end
  end += batchSize
 }

 return written, err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                `dynamodbav:"title"`
 Year  int                   `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
```

```
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir BatchWriteItemla section Référence des AWS SDK pour Go API.

`CreateTable`

L'exemple de code suivant montre comment utiliser`CreateTable`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
```

```
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// CreateMovieTable creates a DynamoDB table with a composite primary key defined as
// a string sort key named `title`, and a numeric partition key named `year`.
// This function uses NewTableExistsWaiter to wait for the table to be created by
// DynamoDB before it returns.
func (basics TableBasics) CreateMovieTable(ctx context.Context)
 (*types.TableDescription, error) {
 var tableDesc *types.TableDescription
 table, err := basics.DynamoDbClient.CreateTable(ctx, &dynamodb.CreateTableInput{
  AttributeDefinitions: []types.AttributeDefinition{{
   AttributeName: aws.String("year"),
   AttributeType: types.ScalarAttributeTypeN,
  }, {
   AttributeName: aws.String("title"),
   AttributeType: types.ScalarAttributeTypeS,
  }},
  KeySchema: []types.KeySchemaElement{{
   AttributeName: aws.String("year"),
   KeyType:       types.KeyTypeHash,
  }, {
   AttributeName: aws.String("title"),
   KeyType:       types.KeyTypeRange,
  }},
  TableName:   aws.String(basics.TableName),
  BillingMode: types.BillingModePayPerRequest,
```

```
 })
 if err != nil {
  log.Printf("Couldn't create table %v. Here's why: %v\n", basics.TableName, err)
 } else {
  waiter := dynamodb.NewTableExistsWaiter(basics.DynamoDbClient)
  err = waiter.Wait(ctx, &dynamodb.DescribeTableInput{
   TableName: aws.String(basics.TableName)}, 5*time.Minute)
  if err != nil {
   log.Printf("Wait for table exists failed. Here's why: %v\n", err)
  }
  tableDesc = table.TableDescription
  log.Printf("Ccreating table test")
 }
 return tableDesc, err
}
```

- Pour plus de détails sur l'API, voir CreateTablela section Référence des AWS SDK pour Go API.

`DeleteItem`

L'exemple de code suivant montre comment utiliser`DeleteItem`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// DeleteMovie removes a movie from the DynamoDB table.
func (basics TableBasics) DeleteMovie(ctx context.Context, movie Movie) error {
 _, err := basics.DynamoDbClient.DeleteItem(ctx, &dynamodb.DeleteItemInput{
  TableName: aws.String(basics.TableName), Key: movie.GetKey(),
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
```

```
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir DeleteItemla section Référence des AWS SDK pour Go API.

`DeleteTable`

L'exemple de code suivant montre comment utiliser`DeleteTable`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// DeleteTable deletes the DynamoDB table and all of its data.
func (basics TableBasics) DeleteTable(ctx context.Context) error {
 _, err := basics.DynamoDbClient.DeleteTable(ctx, &dynamodb.DeleteTableInput{
  TableName: aws.String(basics.TableName)})
 if err != nil {
  log.Printf("Couldn't delete table %v. Here's why: %v\n", basics.TableName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteTablela section Référence des AWS SDK pour Go API.

`DescribeTable`

L'exemple de code suivant montre comment utiliser`DescribeTable`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

```
// TableExists determines whether a DynamoDB table exists.
func (basics TableBasics) TableExists(ctx context.Context) (bool, error) {
 exists := true
 _, err := basics.DynamoDbClient.DescribeTable(
  ctx, &dynamodb.DescribeTableInput{TableName: aws.String(basics.TableName)},
 )
 if err != nil {
  var notFoundEx *types.ResourceNotFoundException
  if errors.As(err, &notFoundEx) {
   log.Printf("Table %v does not exist.\n", basics.TableName)
   err = nil
  } else {
   log.Printf("Couldn't determine existence of table %v. Here's why: %v\n",
 basics.TableName, err)
  }
  exists = false
 }
 return exists, err
}
```

- Pour plus de détails sur l'API, voir DescribeTablela section Référence des AWS SDK pour Go API.

`ExecuteStatement`

L'exemple de code suivant montre comment utiliser`ExecuteStatement`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Définissez une structure de réception de fonctions pour l'exemple.

```
import (
 "context"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

Utilisez une instruction INSERT pour ajouter un élément.

```
// AddMovie runs a PartiQL INSERT statement to add a movie to the DynamoDB table.
func (runner PartiQLRunner) AddMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't insert an item with PartiQL. Here's why: %v\n", err)
 }
 return err
}
```

Utilisez une instruction SELECT pour obtenir un élément.

```
// GetMovie runs a PartiQL SELECT statement to get a movie from the DynamoDB table
 by
// title and year.
func (runner PartiQLRunner) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 var movie Movie
 params, err := attributevalue.MarshalList([]interface{}{title, year})
 if err != nil {
  panic(err)
 }
 response, err := runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Items[0], &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}
```

Utilisez une instruction SELECT pour obtenir une liste d'éléments et projeter les résultats.

```
// GetAllMovies runs a PartiQL SELECT statement to get all movies from the DynamoDB
 table.
// pageSize is not typically required and is used to show how to paginate the
 results.
// The results are projected to return only the title and rating of each movie.
```

```
func (runner PartiQLRunner) GetAllMovies(ctx context.Context, pageSize int32)
 ([]map[string]interface{}, error) {
 var output []map[string]interface{}
 var response *dynamodb.ExecuteStatementOutput
 var err error
 var nextToken *string
 for moreData := true; moreData; {
  response, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
   Statement: aws.String(
    fmt.Sprintf("SELECT title, info.rating FROM \"%v\"", runner.TableName)),
   Limit:     aws.Int32(pageSize),
   NextToken: nextToken,
  })
  if err != nil {
   log.Printf("Couldn't get movies. Here's why: %v\n", err)
   moreData = false
  } else {
   var pageOutput []map[string]interface{}
   err = attributevalue.UnmarshalListOfMaps(response.Items, &pageOutput)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    log.Printf("Got a page of length %v.\n", len(response.Items))
    output = append(output, pageOutput...)
   }
   nextToken = response.NextToken
   moreData = nextToken != nil
  }
 }
 return output, err
}
```

Utilisez une instruction UPDATE pour mettre à jour un élément.

```
// UpdateMovie runs a PartiQL UPDATE statement to update the rating of a movie that
// already exists in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovie(ctx context.Context, movie Movie, rating
 float64) error {
```

```
 params, err := attributevalue.MarshalList([]interface{}{rating, movie.Title,
 movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
 }
 return err
}
```

Utilisez une instruction DELETE pour supprimer un élément.

```
// DeleteMovie runs a PartiQL DELETE statement to remove a movie from the DynamoDB
 table.
func (runner PartiQLRunner) DeleteMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}
```

```
// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir ExecuteStatementla section Référence des AWS SDK pour Go API.

`GetItem`

L'exemple de code suivant montre comment utiliser`GetItem`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
```

```
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// GetMovie gets movie data from the DynamoDB table by using the primary composite
 key
// made of title and year.
func (basics TableBasics) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 movie := Movie{Title: title, Year: year}
 response, err := basics.DynamoDbClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key: movie.GetKey(), TableName: aws.String(basics.TableName),
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Item, &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
```

```
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir GetItemla section Référence des AWS SDK pour Go API.

`ListTables`

L'exemple de code suivant montre comment utiliser`ListTables`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// ListTables lists the DynamoDB table names for the current account.
func (basics TableBasics) ListTables(ctx context.Context) ([]string, error) {
 var tableNames []string
 var output *dynamodb.ListTablesOutput
 var err error
 tablePaginator := dynamodb.NewListTablesPaginator(basics.DynamoDbClient,
 &dynamodb.ListTablesInput{})
 for tablePaginator.HasMorePages() {
  output, err = tablePaginator.NextPage(ctx)
  if err != nil {
```

```
    log.Printf("Couldn't list tables. Here's why: %v\n", err)
    break
   } else {
    tableNames = append(tableNames, output.TableNames...)
   }
  }
  return tableNames, err
}
```

- Pour plus de détails sur l'API, voir ListTablesla section Référence des AWS SDK pour Go API.

`PutItem`

L'exemple de code suivant montre comment utiliser`PutItem`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
```

```
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovie adds a movie the DynamoDB table.
func (basics TableBasics) AddMovie(ctx context.Context, movie Movie) error {
 item, err := attributevalue.MarshalMap(movie)
 if err != nil {
  panic(err)
 }
 _, err = basics.DynamoDbClient.PutItem(ctx, &dynamodb.PutItemInput{
  TableName: aws.String(basics.TableName), Item: item,
 })
 if err != nil {
  log.Printf("Couldn't add item to table. Here's why: %v\n", err)
 }
 return err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
```

```
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir PutItemla section Référence des AWS SDK pour Go API.

`Query`

L'exemple de code suivant montre comment utiliser`Query`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// Query gets all movies in the DynamoDB table that were released in the specified
 year.
// The function uses the `expression` package to build the key condition expression
// that is used in the query.
func (basics TableBasics) Query(ctx context.Context, releaseYear int) ([]Movie,
 error) {
 var err error
 var response *dynamodb.QueryOutput
 var movies []Movie
 keyEx := expression.Key("year").Equal(expression.Value(releaseYear))
```

```
 expr, err := expression.NewBuilder().WithKeyCondition(keyEx).Build()
 if err != nil {
  log.Printf("Couldn't build expression for query. Here's why: %v\n", err)
 } else {
  queryPaginator := dynamodb.NewQueryPaginator(basics.DynamoDbClient,
 &dynamodb.QueryInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   KeyConditionExpression:    expr.KeyCondition(),
  })
  for queryPaginator.HasMorePages() {
   response, err = queryPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't query for movies released in %v. Here's why: %v\n",
 releaseYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
```

```
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus d'informations sur l'API, consultez Requête dans la référence d'API AWS SDK pour Go .

Scan

L'exemple de code suivant montre comment utiliserScan.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// Scan gets all movies in the DynamoDB table that were released in a range of years
// and projects them to return a reduced set of fields.
// The function uses the `expression` package to build the filter and projection
// expressions.
func (basics TableBasics) Scan(ctx context.Context, startYear int, endYear int)
 ([]Movie, error) {
 var movies []Movie
```

```
 var err error
 var response *dynamodb.ScanOutput
 filtEx := expression.Name("year").Between(expression.Value(startYear),
 expression.Value(endYear))
 projEx := expression.NamesList(
  expression.Name("year"), expression.Name("title"), expression.Name("info.rating"))
 expr, err :=
 expression.NewBuilder().WithFilter(filtEx).WithProjection(projEx).Build()
 if err != nil {
  log.Printf("Couldn't build expressions for scan. Here's why: %v\n", err)
 } else {
  scanPaginator := dynamodb.NewScanPaginator(basics.DynamoDbClient,
 &dynamodb.ScanInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   FilterExpression:          expr.Filter(),
   ProjectionExpression:      expr.Projection(),
  })
  for scanPaginator.HasMorePages() {
   response, err = scanPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't scan for movies released between %v and %v. Here's why: %v
\n",
     startYear, endYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
```

```
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour de plus amples informations sur API, consultez TagResource dans AWS SDK pour Go Référence de l'API.

`UpdateItem`

L'exemple de code suivant montre comment utiliser`UpdateItem`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
```

```
}



// UpdateMovie updates the rating and plot of a movie that already exists in the
// DynamoDB table. This function uses the `expression` package to build the update
// expression.
func (basics TableBasics) UpdateMovie(ctx context.Context, movie Movie)
 (map[string]map[string]interface{}, error) {
 var err error
 var response *dynamodb.UpdateItemOutput
 var attributeMap map[string]map[string]interface{}
 update := expression.Set(expression.Name("info.rating"),
 expression.Value(movie.Info["rating"]))
 update.Set(expression.Name("info.plot"), expression.Value(movie.Info["plot"]))
 expr, err := expression.NewBuilder().WithUpdate(update).Build()
 if err != nil {
  log.Printf("Couldn't build expression for update. Here's why: %v\n", err)
 } else {
  response, err = basics.DynamoDbClient.UpdateItem(ctx, &dynamodb.UpdateItemInput{
   TableName:                 aws.String(basics.TableName),
   Key:                       movie.GetKey(),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   UpdateExpression:          expr.Update(),
   ReturnValues:              types.ReturnValueUpdatedNew,
  })
  if err != nil {
   log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
  } else {
   err = attributevalue.UnmarshalMap(response.Attributes, &attributeMap)
   if err != nil {
    log.Printf("Couldn't unmarshall update response. Here's why: %v\n", err)
   }
  }
 }
 return attributeMap, err
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
```

```
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- Pour plus de détails sur l'API, voir UpdateItemla section Référence des AWS SDK pour Go API.

Scénarios

Interroger une table à l'aide de lots d'instructions PartiQL

L'exemple de code suivant illustre comment :

- Obtenez un lot d'éléments en exécutant plusieurs instructions SELECT.
- Ajoutez un lot d'éléments en exécutant plusieurs instructions INSERT.
- Mettez à jour un lot d'éléments en exécutant plusieurs instructions UPDATE.
- Supprimez un lot d'éléments en exécutant plusieurs instructions DELETE.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario qui crée une table et exécute des lots de requêtes PartiQL.

```
import (
 "context"
 "fmt"
 "log"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)
```

```
// RunPartiQLBatchScenario shows you how to use the AWS SDK for Go
// to run batches of PartiQL statements to query a table that stores data about
 movies.
//
//   - Use batches of PartiQL statements to add, get, update, and delete data for
//     individual movies.
//
// This example creates an Amazon DynamoDB service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// This example creates and deletes a DynamoDB table to use during the scenario.
func RunPartiQLBatchScenario(ctx context.Context, sdkConfig aws.Config, tableName
 string) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon DynamoDB PartiQL batch demo.")
 log.Println(strings.Repeat("-", 88))

 tableBasics := actions.TableBasics{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
 }
 runner := actions.PartiQLRunner{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
 }

 exists, err := tableBasics.TableExists(ctx)
 if err != nil {
  panic(err)
 }
 if !exists {
  log.Printf("Creating table %v...\n", tableName)
  _, err = tableBasics.CreateMovieTable(ctx)
  if err != nil {
   panic(err)
  } else {
```

```
  log.Printf("Created table %v.\n", tableName)
 }
} else {
 log.Printf("Table %v already exists.\n", tableName)
}
log.Println(strings.Repeat("-", 88))

currentYear, _, _ := time.Now().Date()
customMovies := []actions.Movie{{
 Title: "House PartiQL",
 Year:  currentYear - 5,
 Info: map[string]interface{}{
  "plot":   "Wacky high jinks result from querying a mysterious database.",
  "rating": 8.5}}, {
 Title: "House PartiQL 2",
 Year:  currentYear - 3,
 Info: map[string]interface{}{
  "plot":   "Moderate high jinks result from querying another mysterious
database.",
  "rating": 6.5}}, {
 Title: "House PartiQL 3",
 Year:  currentYear - 1,
 Info: map[string]interface{}{
  "plot":   "Tepid high jinks result from querying yet another mysterious
database.",
  "rating": 2.5},
},
}

log.Printf("Inserting a batch of movies into table '%v'.\n", tableName)
err = runner.AddMovieBatch(ctx, customMovies)
if err == nil {
 log.Printf("Added %v movies to the table.\n", len(customMovies))
}
log.Println(strings.Repeat("-", 88))

log.Println("Getting data for a batch of movies.")
movies, err := runner.GetMovieBatch(ctx, customMovies)
if err == nil {
 for _, movie := range movies {
  log.Println(movie)
 }
}
log.Println(strings.Repeat("-", 88))
```

```
 newRatings := []float64{7.7, 4.4, 1.1}
 log.Println("Updating a batch of movies with new ratings.")
 err = runner.UpdateMovieBatch(ctx, customMovies, newRatings)
 if err == nil {
  log.Printf("Updated %v movies with new ratings.\n", len(customMovies))
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Getting projected data from the table to verify our update.")
 log.Println("Using a page size of 2 to demonstrate paging.")
 projections, err := runner.GetAllMovies(ctx, 2)
 if err == nil {
  log.Println("All movies:")
  for _, projection := range projections {
   log.Println(projection)
  }
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Deleting a batch of movies.")
 err = runner.DeleteMovieBatch(ctx, customMovies)
 if err == nil {
  log.Printf("Deleted %v movies.\n", len(customMovies))
 }

 err = tableBasics.DeleteTable(ctx)
 if err == nil {
  log.Printf("Deleted table %v.\n", tableBasics.TableName)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
```

```
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

Créez une structure et des méthodes qui exécutent des instructions partiQL.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovieBatch runs a batch of PartiQL INSERT statements to add multiple movies to
 the
// DynamoDB table.
func (runner PartiQLRunner) AddMovieBatch(ctx context.Context, movies []Movie) error
 {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(fmt.Sprintf(
    "INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
 runner.TableName)),
```

```
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't insert a batch of items with PartiQL. Here's why: %v\n", err)
 }
 return err
}



// GetMovieBatch runs a batch of PartiQL SELECT statements to get multiple movies
 from
// the DynamoDB table by title and year.
func (runner PartiQLRunner) GetMovieBatch(ctx context.Context, movies []Movie)
 ([]Movie, error) {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 output, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 var outMovies []Movie
 if err != nil {
  log.Printf("Couldn't get a batch of items with PartiQL. Here's why: %v\n", err)
 } else {
  for _, response := range output.Responses {
   var movie Movie
```

```
   err = attributevalue.UnmarshalMap(response.Item, &movie)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    outMovies = append(outMovies, movie)
   }
  }
 }
 return outMovies, err
}



// GetAllMovies runs a PartiQL SELECT statement to get all movies from the DynamoDB
 table.
// pageSize is not typically required and is used to show how to paginate the
 results.
// The results are projected to return only the title and rating of each movie.
func (runner PartiQLRunner) GetAllMovies(ctx context.Context, pageSize int32)
 ([]map[string]interface{}, error) {
 var output []map[string]interface{}
 var response *dynamodb.ExecuteStatementOutput
 var err error
 var nextToken *string
 for moreData := true; moreData; {
  response, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
   Statement: aws.String(
    fmt.Sprintf("SELECT title, info.rating FROM \"%v\"", runner.TableName)),
   Limit:     aws.Int32(pageSize),
   NextToken: nextToken,
  })
  if err != nil {
   log.Printf("Couldn't get movies. Here's why: %v\n", err)
   moreData = false
  } else {
   var pageOutput []map[string]interface{}
   err = attributevalue.UnmarshalListOfMaps(response.Items, &pageOutput)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    log.Printf("Got a page of length %v.\n", len(response.Items))
    output = append(output, pageOutput...)
   }
```

```
    nextToken = response.NextToken
    moreData = nextToken != nil
   }
  }
  return output, err
}



// UpdateMovieBatch runs a batch of PartiQL UPDATE statements to update the rating
 of
// multiple movies that already exist in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovieBatch(ctx context.Context, movies []Movie,
 ratings []float64) error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{ratings[index],
 movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't update the batch of movies. Here's why: %v\n", err)
 }
 return err
}



// DeleteMovieBatch runs a batch of PartiQL DELETE statements to remove multiple
 movies
// from the DynamoDB table.
```

```
func (runner PartiQLRunner) DeleteMovieBatch(ctx context.Context, movies []Movie)
 error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't delete the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir BatchExecuteStatementla section Référence des AWS SDK pour Go API.

Interroger une table à l'aide de PartiqL

L’exemple de code suivant illustre comment :

- Obtenez un élément en exécutant une instruction SELECT.
- Ajoutez un élément en exécutant une instruction INSERT.
- Mettez à jour un élément en exécutant une instruction UPDATE.
- Supprimez un élément en exécutant une instruction DELETE.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario qui crée une table et exécute des requêtes ParIQL.

```
import (
 "context"
 "fmt"
 "log"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)

// RunPartiQLSingleScenario shows you how to use the AWS SDK for Go
// to use PartiQL to query a table that stores data about movies.
//
// * Use PartiQL statements to add, get, update, and delete data for individual
 movies.
//
// This example creates an Amazon DynamoDB service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// This example creates and deletes a DynamoDB table to use during the scenario.
func RunPartiQLSingleScenario(ctx context.Context, sdkConfig aws.Config, tableName
 string) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
```

```
log.Println("Welcome to the Amazon DynamoDB PartiQL single action demo.")
log.Println(strings.Repeat("-", 88))

tableBasics := actions.TableBasics{
 DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
 TableName:      tableName,
}
runner := actions.PartiQLRunner{
 DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
 TableName:      tableName,
}

exists, err := tableBasics.TableExists(ctx)
if err != nil {
 panic(err)
}
if !exists {
 log.Printf("Creating table %v...\n", tableName)
 _, err = tableBasics.CreateMovieTable(ctx)
 if err != nil {
  panic(err)
 } else {
  log.Printf("Created table %v.\n", tableName)
 }
} else {
 log.Printf("Table %v already exists.\n", tableName)
}
log.Println(strings.Repeat("-", 88))

currentYear, _, _ := time.Now().Date()
customMovie := actions.Movie{
 Title: "24 Hour PartiQL People",
 Year:  currentYear,
 Info: map[string]interface{}{
  "plot":   "A group of data developers discover a new query language they can't
stop using.",
  "rating": 9.9,
 },
}

log.Printf("Inserting movie '%v' released in %v.", customMovie.Title,
customMovie.Year)
err = runner.AddMovie(ctx, customMovie)
if err == nil {
```

```
  log.Printf("Added %v to the movie table.\n", customMovie.Title)
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Getting data for movie '%v' released in %v.", customMovie.Title,
 customMovie.Year)
 movie, err := runner.GetMovie(ctx, customMovie.Title, customMovie.Year)
 if err == nil {
  log.Println(movie)
 }
 log.Println(strings.Repeat("-", 88))

 newRating := 6.6
 log.Printf("Updating movie '%v' with a rating of %v.", customMovie.Title,
 newRating)
 err = runner.UpdateMovie(ctx, customMovie, newRating)
 if err == nil {
  log.Printf("Updated %v with a new rating.\n", customMovie.Title)
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Getting data again to verify the update.")
 movie, err = runner.GetMovie(ctx, customMovie.Title, customMovie.Year)
 if err == nil {
  log.Println(movie)
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Deleting movie '%v'.\n", customMovie.Title)
 err = runner.DeleteMovie(ctx, customMovie)
 if err == nil {
  log.Printf("Deleted %v.\n", customMovie.Title)
 }

 err = tableBasics.DeleteTable(ctx)
 if err == nil {
  log.Printf("Deleted table %v.\n", tableBasics.TableName)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure Movie utilisée dans cet exemple.

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}
```

```
// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

Créez une structure et des méthodes qui exécutent des instructions partiQL.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovie runs a PartiQL INSERT statement to add a movie to the DynamoDB table.
func (runner PartiQLRunner) AddMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
```

```
  Statement: aws.String(
   fmt.Sprintf("INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't insert an item with PartiQL. Here's why: %v\n", err)
 }
 return err
}



// GetMovie runs a PartiQL SELECT statement to get a movie from the DynamoDB table
 by
// title and year.
func (runner PartiQLRunner) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 var movie Movie
 params, err := attributevalue.MarshalList([]interface{}{title, year})
 if err != nil {
  panic(err)
 }
 response, err := runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Items[0], &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}



// UpdateMovie runs a PartiQL UPDATE statement to update the rating of a movie that
```

```
// already exists in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovie(ctx context.Context, movie Movie, rating
 float64) error {
 params, err := attributevalue.MarshalList([]interface{}{rating, movie.Title,
 movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
 }
 return err
}



// DeleteMovie runs a PartiQL DELETE statement to remove a movie from the DynamoDB
 table.
func (runner PartiQLRunner) DeleteMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir ExecuteStatementla section Référence des AWS SDK pour Go API.

Exemples sans serveur

Invocation d’une fonction Lambda à partir d’un déclencheur DynamoDB

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements d'un flux DynamoDB. La fonction récupère les données utiles DynamoDB et journalise le contenu de l’enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l’exemple complet et découvrez comment le configurer et l’exécuter dans le référentiel d’exemples sans serveur.

Consommation d’un événement DynamoDB avec Lambda en utilisant Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-lambda-go/events"
 "fmt"
)

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*string, error)
 {
 if len(event.Records) == 0 {
  return nil, fmt.Errorf("received empty event")
 }

 for _, record := range event.Records {
```

```
    LogDynamoDBRecord(record)
 }

 message := fmt.Sprintf("Records processed: %d", len(event.Records))
 return &message, nil
}

func main() {
 lambda.Start(HandleRequest)
}

func LogDynamoDBRecord(record events.DynamoDBEventRecord){
 fmt.Println(record.EventID)
 fmt.Println(record.EventName)
 fmt.Printf("%+v\n", record.Change)
}
```

Signalement des échecs d'articles par lots pour les fonctions Lambda à l'aide d'un déclencheur DynamoDB

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'un flux DynamoDB. La fonction signale les défaillances échecs d'articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots DynamoDB avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
```

```
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

type BatchItemFailure struct {
 ItemIdentifier string `json:"ItemIdentifier"`
}

type BatchResult struct {
 BatchItemFailures []BatchItemFailure `json:"BatchItemFailures"`
}

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*BatchResult,
 error) {
 var batchItemFailures []BatchItemFailure
 curRecordSequenceNumber := ""

 for _, record := range event.Records {
  // Process your record
  curRecordSequenceNumber = record.Change.SequenceNumber
 }

 if curRecordSequenceNumber != "" {
  batchItemFailures = append(batchItemFailures, BatchItemFailure{ItemIdentifier:
 curRecordSequenceNumber})
 }

 batchResult := BatchResult{
  BatchItemFailures: batchItemFailures,
 }

 return &batchResult, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

AWS contributions communautaires

Création et test d'une application sans serveur

L'exemple de code suivant montre comment créer et tester une application sans serveur à l'aide d'API Gateway avec Lambda et DynamoDB

Kit SDK for Go V2

Montre comment créer et tester une application sans serveur composée d'une API Gateway avec Lambda et DynamoDB à l'aide du SDK Go.

Pour obtenir le code source complet et les instructions de configuration et d'exécution, consultez l'exemple complet sur GitHub.

Les services utilisés dans cet exemple

- API Gateway
- DynamoDB
- Lambda

Exemples d'IAM utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec IAM.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour IAM

Les exemples de code suivants montrent comment démarrer avec IAM.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/iam"
)

// main uses the AWS SDK for Go (v2) to create an AWS Identity and Access Management
 (IAM)
// client and list up to 10 policies in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 iamClient := iam.NewFromConfig(sdkConfig)
 const maxPols = 10
 fmt.Printf("Let's list up to %v policies for your account.\n", maxPols)
 result, err := iamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPols),
 })
 if err != nil {
  fmt.Printf("Couldn't list policies for your account. Here's why: %v\n", err)
```

```
  return
 }
 if len(result.Policies) == 0 {
  fmt.Println("You don't have any policies!")
 } else {
  for _, policy := range result.Policies {
   fmt.Printf("\t%v\n", *policy.PolicyName)
  }
 }
}
```

- Pour plus de détails sur l'API, voir ListPolicieslа section Référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions

Principes de base

Principes de base

L'exemple de code suivant montre comment créer un utilisateur et assumer un rôle.

> **Warning**
>
> Afin d'éviter les risques de sécurité, n'employez pas les utilisateurs IAM pour l'authentification lorsque vous développez des logiciels spécialisés ou lorsque vous travaillez avec des données réelles. Préférez la fédération avec un fournisseur d'identité tel que AWS IAM Identity Center.

- Créer un utilisateur sans autorisation.
- Créer un rôle qui accorde l'autorisation de répertorier les compartiments Amazon S3 pour le compte.
- Ajouter une politique pour permettre à l'utilisateur d'assumer le rôle.

- Assumez le rôle et répertorier les compartiments S3 à l'aide d'informations d'identification temporaires, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "fmt"
 "log"
 "math/rand"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/credentials"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/sts"
 "github.com/aws/smithy-go"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/iam/actions"
)

// AssumeRoleScenario shows you how to use the AWS Identity and Access Management
 (IAM)
// service to perform the following actions:
//
//  1. Create a user who has no permissions.
//  2. Create a role that grants permission to list Amazon Simple Storage Service
//     (Amazon S3) buckets for the account.
```

```
//  3. Add a policy to let the user assume the role.
//  4. Try and fail to list buckets without permissions.
//  5. Assume the role and list S3 buckets using temporary credentials.
//  6. Delete the policy, role, and user.
type AssumeRoleScenario struct {
 sdkConfig      aws.Config
 accountWrapper actions.AccountWrapper
 policyWrapper  actions.PolicyWrapper
 roleWrapper    actions.RoleWrapper
 userWrapper    actions.UserWrapper
 questioner     demotools.IQuestioner
 helper         IScenarioHelper
 isTestRun      bool
}

// NewAssumeRoleScenario constructs an AssumeRoleScenario instance from a
 configuration.
// It uses the specified config to get an IAM client and create wrappers for the
 actions
// used in the scenario.
func NewAssumeRoleScenario(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) AssumeRoleScenario {
 iamClient := iam.NewFromConfig(sdkConfig)
 return AssumeRoleScenario{
  sdkConfig:      sdkConfig,
  accountWrapper: actions.AccountWrapper{IamClient: iamClient},
  policyWrapper:  actions.PolicyWrapper{IamClient: iamClient},
  roleWrapper:    actions.RoleWrapper{IamClient: iamClient},
  userWrapper:    actions.UserWrapper{IamClient: iamClient},
  questioner:     questioner,
  helper:         helper,
 }
}

// addTestOptions appends the API options specified in the original configuration to
// another configuration. This is used to attach the middleware stubber to clients
// that are constructed during the scenario, which is needed for unit testing.
func (scenario AssumeRoleScenario) addTestOptions(scenarioConfig *aws.Config) {
 if scenario.isTestRun {
  scenarioConfig.APIOptions = append(scenarioConfig.APIOptions,
 scenario.sdkConfig.APIOptions...)
 }
}
```

```
// Run runs the interactive scenario.
func (scenario AssumeRoleScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong with the demo.\n")
   log.Println(r)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the AWS Identity and Access Management (IAM) assume role
 demo.")
 log.Println(strings.Repeat("-", 88))

 user := scenario.CreateUser(ctx)
 accessKey := scenario.CreateAccessKey(ctx, user)
 role := scenario.CreateRoleAndPolicies(ctx, user)
 noPermsConfig := scenario.ListBucketsWithoutPermissions(ctx, accessKey)
 scenario.ListBucketsWithAssumedRole(ctx, noPermsConfig, role)
 scenario.Cleanup(ctx, user, role)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// CreateUser creates a new IAM user. This user has no permissions.
func (scenario AssumeRoleScenario) CreateUser(ctx context.Context) *types.User {
 log.Println("Let's create an example user with no permissions.")
 userName := scenario.questioner.Ask("Enter a name for the example user:",
 demotools.NotEmpty{})
 user, err := scenario.userWrapper.GetUser(ctx, userName)
 if err != nil {
  panic(err)
 }
 if user == nil {
  user, err = scenario.userWrapper.CreateUser(ctx, userName)
  if err != nil {
   panic(err)
  }
  log.Printf("Created user %v.\n", *user.UserName)
 } else {
  log.Printf("User %v already exists.\n", *user.UserName)
 }
```

```
 log.Println(strings.Repeat("-", 88))
 return user
}

// CreateAccessKey creates an access key for the user.
func (scenario AssumeRoleScenario) CreateAccessKey(ctx context.Context, user
 *types.User) *types.AccessKey {
 accessKey, err := scenario.userWrapper.CreateAccessKeyPair(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 log.Printf("Created access key %v for your user.", *accessKey.AccessKeyId)
 log.Println("Waiting a few seconds for your user to be ready...")
 scenario.helper.Pause(10)
 log.Println(strings.Repeat("-", 88))
 return accessKey
}

// CreateRoleAndPolicies creates a policy that grants permission to list S3 buckets
 for
// the current account and attaches the policy to a newly created role. It also adds
 an
// inline policy to the specified user that grants the user permission to assume the
 role.
func (scenario AssumeRoleScenario) CreateRoleAndPolicies(ctx context.Context, user
 *types.User) *types.Role {
 log.Println("Let's create a role and policy that grant permission to list S3
 buckets.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 listBucketsRole, err := scenario.roleWrapper.CreateRole(ctx,
 scenario.helper.GetName(), *user.Arn)
 if err != nil {
  panic(err)
 }
 log.Printf("Created role %v.\n", *listBucketsRole.RoleName)
 listBucketsPolicy, err := scenario.policyWrapper.CreatePolicy(
  ctx, scenario.helper.GetName(), []string{"s3:ListAllMyBuckets"}, "arn:aws:s3:::*")
 if err != nil {
  panic(err)
 }
 log.Printf("Created policy %v.\n", *listBucketsPolicy.PolicyName)
 err = scenario.roleWrapper.AttachRolePolicy(ctx, *listBucketsPolicy.Arn,
 *listBucketsRole.RoleName)
 if err != nil {
```

```
  panic(err)
 }
 log.Printf("Attached policy %v to role %v.\n", *listBucketsPolicy.PolicyName,
  *listBucketsRole.RoleName)
 err = scenario.userWrapper.CreateUserPolicy(ctx, *user.UserName,
 scenario.helper.GetName(),
  []string{"sts:AssumeRole"}, *listBucketsRole.Arn)
 if err != nil {
  panic(err)
 }
 log.Printf("Created an inline policy for user %v that lets the user assume the
 role.\n",
  *user.UserName)
 log.Println("Let's give AWS a few seconds to propagate these new resources and
 connections...")
 scenario.helper.Pause(10)
 log.Println(strings.Repeat("-", 88))
 return listBucketsRole
}

// ListBucketsWithoutPermissions creates an Amazon S3 client from the user's access
 key
// credentials and tries to list buckets for the account. Because the user does not
 have
// permission to perform this action, the action fails.
func (scenario AssumeRoleScenario) ListBucketsWithoutPermissions(ctx
 context.Context, accessKey *types.AccessKey) *aws.Config {
 log.Println("Let's try to list buckets without permissions. This should return an
 AccessDenied error.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 noPermsConfig, err := config.LoadDefaultConfig(ctx,
  config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider(
   *accessKey.AccessKeyId, *accessKey.SecretAccessKey, ""),
  ))
 if err != nil {
  panic(err)
 }

 // Add test options if this is a test run. This is needed only for testing
 purposes.
 scenario.addTestOptions(&noPermsConfig)

 s3Client := s3.NewFromConfig(noPermsConfig)
 _, err = s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
```

```
 if err != nil {
  // The SDK for Go does not model the AccessDenied error, so check ErrorCode
 directly.
  var ae smithy.APIError
  if errors.As(err, &ae) {
   switch ae.ErrorCode() {
   case "AccessDenied":
    log.Println("Got AccessDenied error, which is the expected result because\n" +
     "the ListBuckets call was made without permissions.")
   default:
    log.Println("Expected AccessDenied, got something else.")
    panic(err)
   }
  }
 } else {
  log.Println("Expected AccessDenied error when calling ListBuckets without
 permissions,\n" +
   "but the call succeeded. Continuing the example anyway...")
 }
 log.Println(strings.Repeat("-", 88))
 return &noPermsConfig
}

// ListBucketsWithAssumedRole performs the following actions:
//
//  1. Creates an AWS Security Token Service (AWS STS) client from the config
 created from
//     the user's access key credentials.
//  2. Gets temporary credentials by assuming the role that grants permission to
 list the
//     buckets.
//  3. Creates an Amazon S3 client from the temporary credentials.
//  4. Lists buckets for the account. Because the temporary credentials are
 generated by
//     assuming the role that grants permission, the action succeeds.
func (scenario AssumeRoleScenario) ListBucketsWithAssumedRole(ctx context.Context,
 noPermsConfig *aws.Config, role *types.Role) {
 log.Println("Let's assume the role that grants permission to list buckets and try
 again.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 stsClient := sts.NewFromConfig(*noPermsConfig)
 tempCredentials, err := stsClient.AssumeRole(ctx, &sts.AssumeRoleInput{
  RoleArn:         role.Arn,
  RoleSessionName: aws.String("AssumeRoleExampleSession"),
```

```
  DurationSeconds: aws.Int32(900),
 })
 if err != nil {
  log.Printf("Couldn't assume role %v.\n", *role.RoleName)
  panic(err)
 }
 log.Printf("Assumed role %v, got temporary credentials.\n", *role.RoleName)
 assumeRoleConfig, err := config.LoadDefaultConfig(ctx,
  config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider(
   *tempCredentials.Credentials.AccessKeyId,
   *tempCredentials.Credentials.SecretAccessKey,
   *tempCredentials.Credentials.SessionToken),
  ),
 )
 if err != nil {
  panic(err)
 }

 // Add test options if this is a test run. This is needed only for testing
 purposes.
 scenario.addTestOptions(&assumeRoleConfig)

 s3Client := s3.NewFromConfig(assumeRoleConfig)
 result, err := s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
 if err != nil {
  log.Println("Couldn't list buckets with assumed role credentials.")
  panic(err)
 }
 log.Println("Successfully called ListBuckets with assumed role credentials, \n" +
  "here are some of them:")
 for i := 0; i < len(result.Buckets) && i < 5; i++ {
  log.Printf("\t%v\n", *result.Buckets[i].Name)
 }
 log.Println(strings.Repeat("-", 88))
}

// Cleanup deletes all resources created for the scenario.
func (scenario AssumeRoleScenario) Cleanup(ctx context.Context, user *types.User,
 role *types.Role) {
 if scenario.questioner.AskBool(
  "Do you want to delete the resources created for this example? (y/n)", "y",
 ) {
  policies, err := scenario.roleWrapper.ListAttachedRolePolicies(ctx,
 *role.RoleName)
```

```
 if err != nil {
  panic(err)
 }
 for _, policy := range policies {
  err = scenario.roleWrapper.DetachRolePolicy(ctx, *role.RoleName,
*policy.PolicyArn)
  if err != nil {
   panic(err)
  }
  err = scenario.policyWrapper.DeletePolicy(ctx, *policy.PolicyArn)
  if err != nil {
   panic(err)
  }
  log.Printf("Detached policy %v from role %v and deleted the policy.\n",
   *policy.PolicyName, *role.RoleName)
 }
 err = scenario.roleWrapper.DeleteRole(ctx, *role.RoleName)
 if err != nil {
  panic(err)
 }
 log.Printf("Deleted role %v.\n", *role.RoleName)

 userPols, err := scenario.userWrapper.ListUserPolicies(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 for _, userPol := range userPols {
  err = scenario.userWrapper.DeleteUserPolicy(ctx, *user.UserName, userPol)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleted policy %v from user %v.\n", userPol, *user.UserName)
 }
 keys, err := scenario.userWrapper.ListAccessKeys(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 for _, key := range keys {
  err = scenario.userWrapper.DeleteAccessKey(ctx, *user.UserName, *key.AccessKeyId)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleted access key %v from user %v.\n", *key.AccessKeyId,
*user.UserName)
```

```
  }
  err = scenario.userWrapper.DeleteUser(ctx, *user.UserName)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleted user %v.\n", *user.UserName)
  log.Println(strings.Repeat("-", 88))
 }

}

// IScenarioHelper abstracts input and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 GetName() string
 Pause(secs int)
}

const rMax = 100000

type ScenarioHelper struct {
 Prefix string
 Random *rand.Rand
}

// GetName returns a unique name formed of a prefix and a random number.
func (helper *ScenarioHelper) GetName() string {
 return fmt.Sprintf("%v%v", helper.Prefix, helper.Random.Intn(rMax))
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}
```

Définissez une structure qui encapsule les actions du compte.

```
import (
 "context"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// GetAccountPasswordPolicy gets the account password policy for the current
 account.
// If no policy has been set, a NoSuchEntityException is error is returned.
func (wrapper AccountWrapper) GetAccountPasswordPolicy(ctx context.Context)
 (*types.PasswordPolicy, error) {
 var pwPolicy *types.PasswordPolicy
 result, err := wrapper.IamClient.GetAccountPasswordPolicy(ctx,
  &iam.GetAccountPasswordPolicyInput{})
 if err != nil {
  log.Printf("Couldn't get account password policy. Here's why: %v\n", err)
 } else {
  pwPolicy = result.PasswordPolicy
 }
 return pwPolicy, err
}



// ListSAMLProviders gets the SAML providers for the account.
func (wrapper AccountWrapper) ListSAMLProviders(ctx context.Context)
 ([]types.SAMLProviderListEntry, error) {
 var providers []types.SAMLProviderListEntry
 result, err := wrapper.IamClient.ListSAMLProviders(ctx,
 &iam.ListSAMLProvidersInput{})
 if err != nil {
  log.Printf("Couldn't list SAML providers. Here's why: %v\n", err)
 } else {
  providers = result.SAMLProviderList
 }
```

```
 return providers, err
}
```

Définissez une structure qui encapsule les actions de la politique.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// ListPolicies gets up to maxPolicies policies.
func (wrapper PolicyWrapper) ListPolicies(ctx context.Context, maxPolicies int32)
 ([]types.Policy, error) {
 var policies []types.Policy
 result, err := wrapper.IamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPolicies),
 })
 if err != nil {
  log.Printf("Couldn't list policies. Here's why: %v\n", err)
 } else {
  policies = result.Policies
 }
 return policies, err
}
```

```
// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    []string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
}

// CreatePolicy creates a policy that grants a list of actions to the specified
 resource.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper PolicyWrapper) CreatePolicy(ctx context.Context, policyName string,
 actions []string,
 resourceArn string) (*types.Policy, error) {
 var policy *types.Policy
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(resourceArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n",
 resourceArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreatePolicy(ctx, &iam.CreatePolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't create policy %v. Here's why: %v\n", policyName, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}



// GetPolicy gets data about a policy.
func (wrapper PolicyWrapper) GetPolicy(ctx context.Context, policyArn string)
 (*types.Policy, error) {
 var policy *types.Policy
 result, err := wrapper.IamClient.GetPolicy(ctx, &iam.GetPolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't get policy %v. Here's why: %v\n", policyArn, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}



// DeletePolicy deletes a policy.
func (wrapper PolicyWrapper) DeletePolicy(ctx context.Context, policyArn string)
 error {
 _, err := wrapper.IamClient.DeletePolicy(ctx, &iam.DeletePolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't delete policy %v. Here's why: %v\n", policyArn, err)
 }
 return err
}
```

Définissez une structure qui encapsule les actions du rôle.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRoles gets up to maxRoles roles.
func (wrapper RoleWrapper) ListRoles(ctx context.Context, maxRoles int32)
 ([]types.Role, error) {
 var roles []types.Role
 result, err := wrapper.IamClient.ListRoles(ctx,
  &iam.ListRolesInput{MaxItems: aws.Int32(maxRoles)},
 )
 if err != nil {
  log.Printf("Couldn't list roles. Here's why: %v\n", err)
 } else {
  roles = result.Roles
 }
 return roles, err
}



// CreateRole creates a role that trusts a specified user. The trusted user can
 assume
// the role to acquire its permissions.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper RoleWrapper) CreateRole(ctx context.Context, roleName string,
 trustedUserArn string) (*types.Role, error) {
 var role *types.Role
```

```
 trustPolicy := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Principal: map[string]string{"AWS": trustedUserArn},
   Action:    []string{"sts:AssumeRole"},
  }},
 }
 policyBytes, err := json.Marshal(trustPolicy)
 if err != nil {
  log.Printf("Couldn't create trust policy for %v. Here's why: %v\n",
 trustedUserArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreateRole(ctx, &iam.CreateRoleInput{
  AssumeRolePolicyDocument: aws.String(string(policyBytes)),
  RoleName:                 aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't create role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}



// GetRole gets data about a role.
func (wrapper RoleWrapper) GetRole(ctx context.Context, roleName string)
 (*types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.GetRole(ctx,
  &iam.GetRoleInput{RoleName: aws.String(roleName)})
 if err != nil {
  log.Printf("Couldn't get role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

```
// CreateServiceLinkedRole creates a service-linked role that is owned by the
 specified service.
func (wrapper RoleWrapper) CreateServiceLinkedRole(ctx context.Context, serviceName
 string, description string) (
 *types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.CreateServiceLinkedRole(ctx,
 &iam.CreateServiceLinkedRoleInput{
  AWSServiceName: aws.String(serviceName),
  Description:    aws.String(description),
 })
 if err != nil {
  log.Printf("Couldn't create service-linked role %v. Here's why: %v\n",
 serviceName, err)
 } else {
  role = result.Role
 }
 return role, err
}



// DeleteServiceLinkedRole deletes a service-linked role.
func (wrapper RoleWrapper) DeleteServiceLinkedRole(ctx context.Context, roleName
 string) error {
 _, err := wrapper.IamClient.DeleteServiceLinkedRole(ctx,
 &iam.DeleteServiceLinkedRoleInput{
  RoleName: aws.String(roleName)},
 )
 if err != nil {
  log.Printf("Couldn't delete service-linked role %v. Here's why: %v\n", roleName,
 err)
 }
 return err
}



// AttachRolePolicy attaches a policy to a role.
func (wrapper RoleWrapper) AttachRolePolicy(ctx context.Context, policyArn string,
 roleName string) error {
 _, err := wrapper.IamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
```

```
 })
 if err != nil {
  log.Printf("Couldn't attach policy %v to role %v. Here's why: %v\n", policyArn,
 roleName, err)
 }
 return err
}



// ListAttachedRolePolicies lists the policies that are attached to the specified
 role.
func (wrapper RoleWrapper) ListAttachedRolePolicies(ctx context.Context, roleName
 string) ([]types.AttachedPolicy, error) {
 var policies []types.AttachedPolicy
 result, err := wrapper.IamClient.ListAttachedRolePolicies(ctx,
 &iam.ListAttachedRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list attached policies for role %v. Here's why: %v\n",
 roleName, err)
 } else {
  policies = result.AttachedPolicies
 }
 return policies, err
}



// DetachRolePolicy detaches a policy from a role.
func (wrapper RoleWrapper) DetachRolePolicy(ctx context.Context, roleName string,
 policyArn string) error {
 _, err := wrapper.IamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't detach policy from role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

```
// ListRolePolicies lists the inline policies for a role.
func (wrapper RoleWrapper) ListRolePolicies(ctx context.Context, roleName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListRolePolicies(ctx, &iam.ListRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for role %v. Here's why: %v\n", roleName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}



// DeleteRole deletes a role. All attached policies must be detached before a
// role can be deleted.
func (wrapper RoleWrapper) DeleteRole(ctx context.Context, roleName string) error {
 _, err := wrapper.IamClient.DeleteRole(ctx, &iam.DeleteRoleInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't delete role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

Définissez une structure qui encapsule les actions de l'utilisateur.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUsers gets up to maxUsers number of users.
func (wrapper UserWrapper) ListUsers(ctx context.Context, maxUsers int32)
 ([]types.User, error) {
 var users []types.User
 result, err := wrapper.IamClient.ListUsers(ctx, &iam.ListUsersInput{
  MaxItems: aws.Int32(maxUsers),
 })
 if err != nil {
  log.Printf("Couldn't list users. Here's why: %v\n", err)
 } else {
  users = result.Users
 }
 return users, err
}



// GetUser gets data about a user.
func (wrapper UserWrapper) GetUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.GetUser(ctx, &iam.GetUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NoSuchEntityException:
    log.Printf("User %v does not exist.\n", userName)
    err = nil
```

```
   default:
    log.Printf("Couldn't get user %v. Here's why: %v\n", userName, err)
   }
  }
 } else {
  user = result.User
 }
 return user, err
}



// CreateUser creates a new user with the specified name.
func (wrapper UserWrapper) CreateUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.CreateUser(ctx, &iam.CreateUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
 } else {
  user = result.User
 }
 return user, err
}



// CreateUserPolicy adds an inline policy to a user. This example creates a policy
 that
// grants a list of actions on a specified role.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper UserWrapper) CreateUserPolicy(ctx context.Context, userName string,
 policyName string, actions []string,
 roleArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(roleArn),
  }},
```

```
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n", roleArn,
 err)
  return err
 }
 _, err = wrapper.IamClient.PutUserPolicy(ctx, &iam.PutUserPolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
  UserName:       aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create policy for user %v. Here's why: %v\n", userName, err)
 }
 return err
}



// ListUserPolicies lists the inline policies for the specified user.
func (wrapper UserWrapper) ListUserPolicies(ctx context.Context, userName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListUserPolicies(ctx, &iam.ListUserPoliciesInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for user %v. Here's why: %v\n", userName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}



// DeleteUserPolicy deletes an inline policy from a user.
func (wrapper UserWrapper) DeleteUserPolicy(ctx context.Context, userName string,
 policyName string) error {
 _, err := wrapper.IamClient.DeleteUserPolicy(ctx, &iam.DeleteUserPolicyInput{
  PolicyName: aws.String(policyName),
  UserName:   aws.String(userName),
 })
```

```
 if err != nil {
  log.Printf("Couldn't delete policy from user %v. Here's why: %v\n", userName, err)
 }
 return err
}



// DeleteUser deletes a user.
func (wrapper UserWrapper) DeleteUser(ctx context.Context, userName string) error {
 _, err := wrapper.IamClient.DeleteUser(ctx, &iam.DeleteUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete user %v. Here's why: %v\n", userName, err)
 }
 return err
}



// CreateAccessKeyPair creates an access key for a user. The returned access key
 contains
// the ID and secret credentials needed to use the key.
func (wrapper UserWrapper) CreateAccessKeyPair(ctx context.Context, userName string)
 (*types.AccessKey, error) {
 var key *types.AccessKey
 result, err := wrapper.IamClient.CreateAccessKey(ctx, &iam.CreateAccessKeyInput{
  UserName: aws.String(userName)})
 if err != nil {
  log.Printf("Couldn't create access key pair for user %v. Here's why: %v\n",
 userName, err)
 } else {
  key = result.AccessKey
 }
 return key, err
}



// DeleteAccessKey deletes an access key from a user.
func (wrapper UserWrapper) DeleteAccessKey(ctx context.Context, userName string,
 keyId string) error {
 _, err := wrapper.IamClient.DeleteAccessKey(ctx, &iam.DeleteAccessKeyInput{
```

```
  AccessKeyId: aws.String(keyId),
  UserName:    aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete access key %v. Here's why: %v\n", keyId, err)
 }
 return err
}



// ListAccessKeys lists the access keys for the specified user.
func (wrapper UserWrapper) ListAccessKeys(ctx context.Context, userName string)
 ([]types.AccessKeyMetadata, error) {
 var keys []types.AccessKeyMetadata
 result, err := wrapper.IamClient.ListAccessKeys(ctx, &iam.ListAccessKeysInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list access keys for user %v. Here's why: %v\n", userName,
 err)
 } else {
  keys = result.AccessKeyMetadata
 }
 return keys, err
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - AttachRolePolicy
  - CreateAccessKey
  - CreatePolicy
  - CreateRole
  - CreateUser
  - DeleteAccessKey
  - DeletePolicy
  - DeleteRole

- DeleteUser
- DeleteUserPolicy
- DetachRolePolicy
- PutUserPolicy

Actions

`AttachRolePolicy`

L'exemple de code suivant montre comment utiliser`AttachRolePolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// AttachRolePolicy attaches a policy to a role.
```

```
func (wrapper RoleWrapper) AttachRolePolicy(ctx context.Context, policyArn string,
 roleName string) error {
 _, err := wrapper.IamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't attach policy %v to role %v. Here's why: %v\n", policyArn,
 roleName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir AttachRolePolicyla section Référence des AWS SDK pour Go API.

`CreateAccessKey`

L'exemple de code suivant montre comment utiliser`CreateAccessKey`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
```

```
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateAccessKeyPair creates an access key for a user. The returned access key
 contains
// the ID and secret credentials needed to use the key.
func (wrapper UserWrapper) CreateAccessKeyPair(ctx context.Context, userName string)
 (*types.AccessKey, error) {
 var key *types.AccessKey
 result, err := wrapper.IamClient.CreateAccessKey(ctx, &iam.CreateAccessKeyInput{
  UserName: aws.String(userName)})
 if err != nil {
  log.Printf("Couldn't create access key pair for user %v. Here's why: %v\n",
 userName, err)
 } else {
  key = result.AccessKey
 }
 return key, err
}
```

- Pour plus de détails sur l'API, voir CreateAccessKeyla section Référence des AWS SDK pour Go API.

`CreatePolicy`

L'exemple de code suivant montre comment utiliser`CreatePolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    []string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
```

```
}

// CreatePolicy creates a policy that grants a list of actions to the specified
 resource.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper PolicyWrapper) CreatePolicy(ctx context.Context, policyName string,
 actions []string,
 resourceArn string) (*types.Policy, error) {
 var policy *types.Policy
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(resourceArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n",
 resourceArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreatePolicy(ctx, &iam.CreatePolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
 })
 if err != nil {
  log.Printf("Couldn't create policy %v. Here's why: %v\n", policyName, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}
```

- Pour plus de détails sur l'API, voir CreatePolicyla section Référence des AWS SDK pour Go API.

`CreateRole`

L'exemple de code suivant montre comment utiliser`CreateRole`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// CreateRole creates a role that trusts a specified user. The trusted user can
 assume
// the role to acquire its permissions.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper RoleWrapper) CreateRole(ctx context.Context, roleName string,
 trustedUserArn string) (*types.Role, error) {
 var role *types.Role
 trustPolicy := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
```

```
    Effect:    "Allow",
    Principal: map[string]string{"AWS": trustedUserArn},
    Action:    []string{"sts:AssumeRole"},
   }},
  }
  policyBytes, err := json.Marshal(trustPolicy)
  if err != nil {
   log.Printf("Couldn't create trust policy for %v. Here's why: %v\n",
  trustedUserArn, err)
   return nil, err
  }
  result, err := wrapper.IamClient.CreateRole(ctx, &iam.CreateRoleInput{
   AssumeRolePolicyDocument: aws.String(string(policyBytes)),
   RoleName:                 aws.String(roleName),
  })
  if err != nil {
   log.Printf("Couldn't create role %v. Here's why: %v\n", roleName, err)
  } else {
   role = result.Role
  }
  return role, err
}
```

- Pour plus de détails sur l'API, voir CreateRolela section Référence des AWS SDK pour Go API.

`CreateServiceLinkedRole`

L'exemple de code suivant montre comment utiliser`CreateServiceLinkedRole`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
```

```
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// CreateServiceLinkedRole creates a service-linked role that is owned by the
 specified service.
func (wrapper RoleWrapper) CreateServiceLinkedRole(ctx context.Context, serviceName
 string, description string) (
 *types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.CreateServiceLinkedRole(ctx,
 &iam.CreateServiceLinkedRoleInput{
  AWSServiceName: aws.String(serviceName),
  Description:    aws.String(description),
 })
 if err != nil {
  log.Printf("Couldn't create service-linked role %v. Here's why: %v\n",
 serviceName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

- Pour plus de détails sur l'API, voir CreateServiceLinkedRolela section Référence des AWS SDK pour Go API.

`CreateUser`

L'exemple de code suivant montre comment utiliser`CreateUser`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateUser creates a new user with the specified name.
func (wrapper UserWrapper) CreateUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.CreateUser(ctx, &iam.CreateUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
 } else {
```

```
  user = result.User
 }
 return user, err
}
```

- Pour plus de détails sur l'API, voir CreateUserla section Référence des AWS SDK pour Go API.

`DeleteAccessKey`

L'exemple de code suivant montre comment utiliser`DeleteAccessKey`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}
```

```
// DeleteAccessKey deletes an access key from a user.
func (wrapper UserWrapper) DeleteAccessKey(ctx context.Context, userName string,
 keyId string) error {
 _, err := wrapper.IamClient.DeleteAccessKey(ctx, &iam.DeleteAccessKeyInput{
  AccessKeyId: aws.String(keyId),
  UserName:    aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete access key %v. Here's why: %v\n", keyId, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteAccessKeyla section Référence des AWS SDK pour Go API.

`DeletePolicy`

L'exemple de code suivant montre comment utiliser`DeletePolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)
```

```
// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// DeletePolicy deletes a policy.
func (wrapper PolicyWrapper) DeletePolicy(ctx context.Context, policyArn string)
 error {
 _, err := wrapper.IamClient.DeletePolicy(ctx, &iam.DeletePolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't delete policy %v. Here's why: %v\n", policyArn, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeletePolicyla section Référence des AWS SDK pour Go API.

`DeleteRole`

L'exemple de code suivant montre comment utiliser`DeleteRole`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
```

```
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DeleteRole deletes a role. All attached policies must be detached before a
// role can be deleted.
func (wrapper RoleWrapper) DeleteRole(ctx context.Context, roleName string) error {
 _, err := wrapper.IamClient.DeleteRole(ctx, &iam.DeleteRoleInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't delete role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteRolela section Référence des AWS SDK pour Go API.

`DeleteServiceLinkedRole`

L'exemple de code suivant montre comment utiliser`DeleteServiceLinkedRole`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DeleteServiceLinkedRole deletes a service-linked role.
func (wrapper RoleWrapper) DeleteServiceLinkedRole(ctx context.Context, roleName
 string) error {
 _, err := wrapper.IamClient.DeleteServiceLinkedRole(ctx,
 &iam.DeleteServiceLinkedRoleInput{
  RoleName: aws.String(roleName)},
 )
 if err != nil {
  log.Printf("Couldn't delete service-linked role %v. Here's why: %v\n", roleName,
 err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteServiceLinkedRolela section Référence des AWS SDK pour Go API.

`DeleteUser`

L'exemple de code suivant montre comment utiliser`DeleteUser`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// DeleteUser deletes a user.
func (wrapper UserWrapper) DeleteUser(ctx context.Context, userName string) error {
 _, err := wrapper.IamClient.DeleteUser(ctx, &iam.DeleteUserInput{
```

```
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteUserla section Référence des AWS SDK pour Go API.

`DeleteUserPolicy`

L'exemple de code suivant montre comment utiliser`DeleteUserPolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}
```

```
// DeleteUserPolicy deletes an inline policy from a user.
func (wrapper UserWrapper) DeleteUserPolicy(ctx context.Context, userName string,
 policyName string) error {
 _, err := wrapper.IamClient.DeleteUserPolicy(ctx, &iam.DeleteUserPolicyInput{
  PolicyName: aws.String(policyName),
  UserName:   aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete policy from user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DeleteUserPolicyla section Référence des AWS SDK pour Go API.

`DetachRolePolicy`

L'exemple de code suivant montre comment utiliser`DetachRolePolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
```

```
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DetachRolePolicy detaches a policy from a role.
func (wrapper RoleWrapper) DetachRolePolicy(ctx context.Context, roleName string,
 policyArn string) error {
 _, err := wrapper.IamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't detach policy from role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, voir DetachRolePolicyla section Référence des AWS SDK pour Go API.

`GetAccountPasswordPolicy`

L'exemple de code suivant montre comment utiliser`GetAccountPasswordPolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// GetAccountPasswordPolicy gets the account password policy for the current
 account.
// If no policy has been set, a NoSuchEntityException is error is returned.
func (wrapper AccountWrapper) GetAccountPasswordPolicy(ctx context.Context)
 (*types.PasswordPolicy, error) {
 var pwPolicy *types.PasswordPolicy
 result, err := wrapper.IamClient.GetAccountPasswordPolicy(ctx,
  &iam.GetAccountPasswordPolicyInput{})
 if err != nil {
  log.Printf("Couldn't get account password policy. Here's why: %v\n", err)
 } else {
  pwPolicy = result.PasswordPolicy
 }
 return pwPolicy, err
}
```

- Pour plus de détails sur l'API, voir GetAccountPasswordPolicyla section Référence des AWS SDK pour Go API.

`GetPolicy`

L'exemple de code suivant montre comment utiliser`GetPolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// GetPolicy gets data about a policy.
func (wrapper PolicyWrapper) GetPolicy(ctx context.Context, policyArn string)
 (*types.Policy, error) {
 var policy *types.Policy
 result, err := wrapper.IamClient.GetPolicy(ctx, &iam.GetPolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't get policy %v. Here's why: %v\n", policyArn, err)
 } else {
```

```
  policy = result.Policy
 }
 return policy, err
}
```

- Pour plus de détails sur l'API, voir GetPolicyla section Référence des AWS SDK pour Go API.

`GetRole`

L'exemple de code suivant montre comment utiliser`GetRole`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}
```

```
// GetRole gets data about a role.
func (wrapper RoleWrapper) GetRole(ctx context.Context, roleName string)
 (*types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.GetRole(ctx,
  &iam.GetRoleInput{RoleName: aws.String(roleName)})
 if err != nil {
  log.Printf("Couldn't get role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetRoleà la section Référence des AWS SDK pour Go API.

`GetUser`

L'exemple de code suivant montre comment utiliser`GetUser`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
```

```
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// GetUser gets data about a user.
func (wrapper UserWrapper) GetUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.GetUser(ctx, &iam.GetUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NoSuchEntityException:
    log.Printf("User %v does not exist.\n", userName)
    err = nil
   default:
    log.Printf("Couldn't get user %v. Here's why: %v\n", userName, err)
   }
  }
 } else {
  user = result.User
 }
 return user, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetUserà la section Référence des AWS SDK pour Go API.

`ListAccessKeys`

L'exemple de code suivant montre comment utiliser`ListAccessKeys`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListAccessKeys lists the access keys for the specified user.
func (wrapper UserWrapper) ListAccessKeys(ctx context.Context, userName string)
 ([]types.AccessKeyMetadata, error) {
 var keys []types.AccessKeyMetadata
 result, err := wrapper.IamClient.ListAccessKeys(ctx, &iam.ListAccessKeysInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list access keys for user %v. Here's why: %v\n", userName,
 err)
 } else {
  keys = result.AccessKeyMetadata
 }
```

```
 return keys, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListAccessKeysà la section Référence des AWS SDK pour Go API.

`ListAttachedRolePolicies`

L'exemple de code suivant montre comment utiliser`ListAttachedRolePolicies`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}
```

```
// ListAttachedRolePolicies lists the policies that are attached to the specified
 role.
func (wrapper RoleWrapper) ListAttachedRolePolicies(ctx context.Context, roleName
 string) ([]types.AttachedPolicy, error) {
 var policies []types.AttachedPolicy
 result, err := wrapper.IamClient.ListAttachedRolePolicies(ctx,
 &iam.ListAttachedRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list attached policies for role %v. Here's why: %v\n",
 roleName, err)
 } else {
  policies = result.AttachedPolicies
 }
 return policies, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListAttachedRolePoliciesà la section Référence des AWS SDK pour Go API.

`ListGroups`

L'exemple de code suivant montre comment utiliser`ListGroups`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// GroupWrapper encapsulates AWS Identity and Access Management (IAM) group actions
// used in the examples.
// It contains an IAM service client that is used to perform group actions.
type GroupWrapper struct {
 IamClient *iam.Client
}



// ListGroups lists up to maxGroups number of groups.
func (wrapper GroupWrapper) ListGroups(ctx context.Context, maxGroups int32)
 ([]types.Group, error) {
 var groups []types.Group
 result, err := wrapper.IamClient.ListGroups(ctx, &iam.ListGroupsInput{
  MaxItems: aws.Int32(maxGroups),
 })
 if err != nil {
  log.Printf("Couldn't list groups. Here's why: %v\n", err)
 } else {
  groups = result.Groups
 }
 return groups, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListGroupsà la section Référence des AWS SDK pour Go API.

`ListPolicies`

L'exemple de code suivant montre comment utiliser`ListPolicies`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// ListPolicies gets up to maxPolicies policies.
func (wrapper PolicyWrapper) ListPolicies(ctx context.Context, maxPolicies int32)
 ([]types.Policy, error) {
 var policies []types.Policy
 result, err := wrapper.IamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPolicies),
 })
 if err != nil {
  log.Printf("Couldn't list policies. Here's why: %v\n", err)
 } else {
  policies = result.Policies
 }
 return policies, err
```

```
}
```

- Pour plus de détails sur l'API, reportez-vous ListPoliciesà la section Référence des AWS SDK pour Go API.

`ListRolePolicies`

L'exemple de code suivant montre comment utiliser`ListRolePolicies`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRolePolicies lists the inline policies for a role.
```

```
func (wrapper RoleWrapper) ListRolePolicies(ctx context.Context, roleName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListRolePolicies(ctx, &iam.ListRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for role %v. Here's why: %v\n", roleName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListRolePoliciesà la section Référence des AWS SDK pour Go API.

`ListRoles`

L'exemple de code suivant montre comment utiliser`ListRoles`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)
```

```
// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRoles gets up to maxRoles roles.
func (wrapper RoleWrapper) ListRoles(ctx context.Context, maxRoles int32)
 ([]types.Role, error) {
 var roles []types.Role
 result, err := wrapper.IamClient.ListRoles(ctx,
  &iam.ListRolesInput{MaxItems: aws.Int32(maxRoles)},
 )
 if err != nil {
  log.Printf("Couldn't list roles. Here's why: %v\n", err)
 } else {
  roles = result.Roles
 }
 return roles, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListRolesà la section Référence des AWS SDK pour Go API.

`ListSAMLProviders`

L'exemple de code suivant montre comment utiliser`ListSAMLProviders`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// ListSAMLProviders gets the SAML providers for the account.
func (wrapper AccountWrapper) ListSAMLProviders(ctx context.Context)
 ([]types.SAMLProviderListEntry, error) {
 var providers []types.SAMLProviderListEntry
 result, err := wrapper.IamClient.ListSAMLProviders(ctx,
 &iam.ListSAMLProvidersInput{})
 if err != nil {
  log.Printf("Couldn't list SAML providers. Here's why: %v\n", err)
 } else {
  providers = result.SAMLProviderList
 }
 return providers, err
}
```

- Pour plus de détails sur l'API, consultez la section Liste SAMLProviders dans la référence des AWS SDK pour Go API.

`ListUserPolicies`

L'exemple de code suivant montre comment utiliser`ListUserPolicies`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUserPolicies lists the inline policies for the specified user.
func (wrapper UserWrapper) ListUserPolicies(ctx context.Context, userName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListUserPolicies(ctx, &iam.ListUserPoliciesInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for user %v. Here's why: %v\n", userName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
```

```
}
```

- Pour plus de détails sur l'API, reportez-vous ListUserPoliciesà la section Référence des AWS SDK pour Go API.

`ListUsers`

L'exemple de code suivant montre comment utiliser`ListUsers`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUsers gets up to maxUsers number of users.
```

```
func (wrapper UserWrapper) ListUsers(ctx context.Context, maxUsers int32)
 ([]types.User, error) {
 var users []types.User
 result, err := wrapper.IamClient.ListUsers(ctx, &iam.ListUsersInput{
  MaxItems: aws.Int32(maxUsers),
 })
 if err != nil {
  log.Printf("Couldn't list users. Here's why: %v\n", err)
 } else {
  users = result.Users
 }
 return users, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListUsersà la section Référence des AWS SDK pour Go API.

`PutUserPolicy`

L'exemple de code suivant montre comment utiliser`PutUserPolicy`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
```

```
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateUserPolicy adds an inline policy to a user. This example creates a policy
 that
// grants a list of actions on a specified role.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper UserWrapper) CreateUserPolicy(ctx context.Context, userName string,
 policyName string, actions []string,
 roleArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(roleArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n", roleArn,
 err)
  return err
 }
 _, err = wrapper.IamClient.PutUserPolicy(ctx, &iam.PutUserPolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
  UserName:       aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create policy for user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous PutUserPolicyà la section Référence des AWS SDK pour Go API.

Exemples de Kinesis utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Kinesis.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Exemples sans serveur

Exemples sans serveur

Invoquer une fonction Lambda à partir d’un déclencheur Kinesis

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements provenant d'un flux Kinesis. La fonction récupère la charge utile Kinesis, décode à partir de Base64 et enregistre le contenu de l’enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l’exemple complet et découvrez comment le configurer et l’exécuter dans le référentiel d’exemples sans serveur.

Consommation d’un événement Kinesis avec Lambda à l’aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
```

```
package main

import (
 "context"
 "log"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent) error {
 if len(kinesisEvent.Records) == 0 {
  log.Printf("empty Kinesis event received")
  return nil
 }

 for _, record := range kinesisEvent.Records {
  log.Printf("processed Kinesis event with EventId: %v", record.EventID)
  recordDataBytes := record.Kinesis.Data
  recordDataText := string(recordDataBytes)
  log.Printf("record data: %v", recordDataText)
  // TODO: Do interesting work based on the new data
 }
 log.Printf("successfully processed %v records", len(kinesisEvent.Records))
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Signalement des échecs d’articles par lots pour les fonctions Lambda à l’aide d’un déclencheur Kinesis

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'un flux Kinesis. La fonction signale les défaillances échecs d’articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots Kinesis avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent)
 (map[string]interface{}, error) {
 batchItemFailures := []map[string]interface{}{}

 for _, record := range kinesisEvent.Records {
  curRecordSequenceNumber := ""

  // Process your record
  if /* Your record processing condition here */ {
   curRecordSequenceNumber = record.Kinesis.SequenceNumber
  }

  // Add a condition to check if the record processing failed
  if curRecordSequenceNumber != "" {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": curRecordSequenceNumber})
  }
 }

 kinesisBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
```

```
 return kinesisBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

Exemples Lambda utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants en utilisant la AWS SDK pour Go V2 avec Lambda.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

AWS les contributions communautaires sont des exemples qui ont été créés et sont maintenus par plusieurs équipes AWS. Pour fournir des commentaires, utilisez le mécanisme fourni dans les référentiels liés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Hello Lambda

Les exemples de code suivants montrent comment démarrer avec Lambda.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
)

// main uses the AWS SDK for Go (v2) to create an AWS Lambda client and list up to
 10
// functions in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 lambdaClient := lambda.NewFromConfig(sdkConfig)

 maxItems := 10
 fmt.Printf("Let's list up to %v functions for your account.\n", maxItems)
 result, err := lambdaClient.ListFunctions(ctx, &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
 })
 if err != nil {
```

```
  fmt.Printf("Couldn't list functions for your account. Here's why: %v\n", err)
  return
 }
 if len(result.Functions) == 0 {
  fmt.Println("You don't have any functions!")
 } else {
  for _, function := range result.Functions {
   fmt.Printf("\t%v\n", *function.FunctionName)
  }
 }
}
```

- Pour plus de détails sur l'API, reportez-vous ListFunctionsà la section Référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions
- Scénarios
- Exemples sans serveur
- AWS contributions communautaires

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- Créer un rôle IAM et une fonction Lambda, puis charger le code du gestionnaire.
- Invoquer la fonction avec un seul paramètre et obtenir des résultats.
- Mettre à jour le code de la fonction et configurer avec une variable d'environnement.
- Invoquer la fonction avec de nouveaux paramètres et obtenir des résultats. Afficher le journal d'exécution renvoyé.
- Répertorier les fonctions pour votre compte, puis nettoyer les ressources.

Pour plus d'informations, consultez Créer une fonction Lambda à l'aide de la console.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Créez un scénario interactif qui vous montre comment démarrer avec les fonctions Lambda.

```
import (
 "archive/zip"
 "bytes"
 "context"
 "encoding/base64"
 "encoding/json"
 "errors"
 "fmt"
 "log"
 "os"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 iamtypes "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/lambda/actions"
)

// GetStartedFunctionsScenario shows you how to use AWS Lambda to perform the
 following
// actions:
//
//  1. Create an AWS Identity and Access Management (IAM) role and Lambda function,
 then upload handler code.
//  2. Invoke the function with a single parameter and get results.
//  3. Update the function code and configure with an environment variable.
```

```
//  4. Invoke the function with new parameters and get results. Display the returned
 execution log.
//  5. List the functions for your account, then clean up resources.
type GetStartedFunctionsScenario struct {
 sdkConfig       aws.Config
 functionWrapper actions.FunctionWrapper
 questioner      demotools.IQuestioner
 helper          IScenarioHelper
 isTestRun       bool
}

// NewGetStartedFunctionsScenario constructs a GetStartedFunctionsScenario instance
 from a configuration.
// It uses the specified config to get a Lambda client and create wrappers for the
 actions
// used in the scenario.
func NewGetStartedFunctionsScenario(sdkConfig aws.Config, questioner
 demotools.IQuestioner,
 helper IScenarioHelper) GetStartedFunctionsScenario {
 lambdaClient := lambda.NewFromConfig(sdkConfig)
 return GetStartedFunctionsScenario{
  sdkConfig:       sdkConfig,
  functionWrapper: actions.FunctionWrapper{LambdaClient: lambdaClient},
  questioner:      questioner,
  helper:          helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedFunctionsScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong with the demo.\n")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the AWS Lambda get started with functions demo.")
 log.Println(strings.Repeat("-", 88))

 role := scenario.GetOrCreateRole(ctx)
 funcName := scenario.CreateFunction(ctx, role)
 scenario.InvokeIncrement(ctx, funcName)
 scenario.UpdateFunction(ctx, funcName)
```

```
 scenario.InvokeCalculator(ctx, funcName)
 scenario.ListFunctions(ctx)
 scenario.Cleanup(ctx, role, funcName)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// GetOrCreateRole checks whether the specified role exists and returns it if it
 does.
// Otherwise, a role is created that specifies Lambda as a trusted principal.
// The AWSLambdaBasicExecutionRole managed policy is attached to the role and the
 role
// is returned.
func (scenario GetStartedFunctionsScenario) GetOrCreateRole(ctx context.Context)
 *iamtypes.Role {
 var role *iamtypes.Role
 iamClient := iam.NewFromConfig(scenario.sdkConfig)
 log.Println("First, we need an IAM role that Lambda can assume.")
 roleName := scenario.questioner.Ask("Enter a name for the role:",
 demotools.NotEmpty{})
 getOutput, err := iamClient.GetRole(ctx, &iam.GetRoleInput{
  RoleName: aws.String(roleName)})
 if err != nil {
  var noSuch *iamtypes.NoSuchEntityException
  if errors.As(err, &noSuch) {
   log.Printf("Role %v doesn't exist. Creating it....\n", roleName)
  } else {
   log.Panicf("Couldn't check whether role %v exists. Here's why: %v\n",
    roleName, err)
  }
 } else {
  role = getOutput.Role
  log.Printf("Found role %v.\n", *role.RoleName)
 }
 if role == nil {
  trustPolicy := PolicyDocument{
   Version: "2012-10-17",
   Statement: []PolicyStatement{{
    Effect:    "Allow",
    Principal: map[string]string{"Service": "lambda.amazonaws.com"},
    Action:    []string{"sts:AssumeRole"},
   }},
```

```
  }
  policyArn := "arn:aws:iam::aws:policy/service-role/AWSLambdaBasicExecutionRole"
  createOutput, err := iamClient.CreateRole(ctx, &iam.CreateRoleInput{
   AssumeRolePolicyDocument: aws.String(trustPolicy.String()),
   RoleName:                 aws.String(roleName),
  })
  if err != nil {
   log.Panicf("Couldn't create role %v. Here's why: %v\n", roleName, err)
  }
  role = createOutput.Role
  _, err = iamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
   PolicyArn: aws.String(policyArn),
   RoleName:  aws.String(roleName),
  })
  if err != nil {
   log.Panicf("Couldn't attach a policy to role %v. Here's why: %v\n", roleName,
 err)
  }
  log.Printf("Created role %v.\n", *role.RoleName)
  log.Println("Let's give AWS a few seconds to propagate resources...")
  scenario.helper.Pause(10)
 }
 log.Println(strings.Repeat("-", 88))
 return role
}

// CreateFunction creates a Lambda function and uploads a handler written in Python.
// The code for the Python handler is packaged as a []byte in .zip format.
func (scenario GetStartedFunctionsScenario) CreateFunction(ctx context.Context, role
 *iamtypes.Role) string {
 log.Println("Let's create a function that increments a number.\n" +
  "The function uses the 'lambda_handler_basic.py' script found in the \n" +
  "'handlers' directory of this project.")
 funcName := scenario.questioner.Ask("Enter a name for the Lambda function:",
 demotools.NotEmpty{})
 zipPackage := scenario.helper.CreateDeploymentPackage("lambda_handler_basic.py",
 fmt.Sprintf("%v.py", funcName))
 log.Printf("Creating function %v and waiting for it to be ready.", funcName)
 funcState := scenario.functionWrapper.CreateFunction(ctx, funcName,
 fmt.Sprintf("%v.lambda_handler", funcName),
  role.Arn, zipPackage)
 log.Printf("Your function is %v.", funcState)
 log.Println(strings.Repeat("-", 88))
 return funcName
```

```
}

// InvokeIncrement invokes a Lambda function that increments a number. The function
// parameters are contained in a Go struct that is used to serialize the parameters
 to
// a JSON payload that is passed to the function.
// The result payload is deserialized into a Go struct that contains an int value.
func (scenario GetStartedFunctionsScenario) InvokeIncrement(ctx context.Context,
 funcName string) {
 parameters := actions.IncrementParameters{Action: "increment"}
 log.Println("Let's invoke our function. This function increments a number.")
 parameters.Number = scenario.questioner.AskInt("Enter a number to increment:",
 demotools.NotEmpty{})
 log.Printf("Invoking %v with %v...\n", funcName, parameters.Number)
 invokeOutput := scenario.functionWrapper.Invoke(ctx, funcName, parameters, false)
 var payload actions.LambdaResultInt
 err := json.Unmarshal(invokeOutput.Payload, &payload)
 if err != nil {
  log.Panicf("Couldn't unmarshal payload from invoking %v. Here's why: %v\n",
   funcName, err)
 }
 log.Printf("Invoking %v with %v returned %v.\n", funcName, parameters.Number,
 payload)
 log.Println(strings.Repeat("-", 88))
}

// UpdateFunction updates the code for a Lambda function by uploading a simple
 arithmetic
// calculator written in Python. The code for the Python handler is packaged as a
// []byte in .zip format.
// After the code is updated, the configuration is also updated with a new log
// level that instructs the handler to log additional information.
func (scenario GetStartedFunctionsScenario) UpdateFunction(ctx context.Context,
 funcName string) {
 log.Println("Let's update the function to an arithmetic calculator.\n" +
  "The function uses the 'lambda_handler_calculator.py' script found in the \n" +
  "'handlers' directory of this project.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 log.Println("Creating deployment package...")
 zipPackage :=
 scenario.helper.CreateDeploymentPackage("lambda_handler_calculator.py",
  fmt.Sprintf("%v.py", funcName))
 log.Println("...and updating the Lambda function and waiting for it to be ready.")
 funcState := scenario.functionWrapper.UpdateFunctionCode(ctx, funcName, zipPackage)
```

```
 log.Printf("Updated function %v. Its current state is %v.", funcName, funcState)
 log.Println("This function uses an environment variable to control logging level.")
 log.Println("Let's set it to DEBUG to get the most logging.")
 scenario.functionWrapper.UpdateFunctionConfiguration(ctx, funcName,
  map[string]string{"LOG_LEVEL": "DEBUG"})
 log.Println(strings.Repeat("-", 88))
}

// InvokeCalculator invokes the Lambda calculator function. The parameters are
 stored in a
// Go struct that is used to serialize the parameters to a JSON payload. That
 payload is then passed
// to the function.
// The result payload is deserialized to a Go struct that stores the result as
 either an
// int or float32, depending on the kind of operation that was specified.
func (scenario GetStartedFunctionsScenario) InvokeCalculator(ctx context.Context,
 funcName string) {
 wantInvoke := true
 choices := []string{"plus", "minus", "times", "divided-by"}
 for wantInvoke {
  choice := scenario.questioner.AskChoice("Select an arithmetic operation:\n",
 choices)
  x := scenario.questioner.AskInt("Enter a value for x:", demotools.NotEmpty{})
  y := scenario.questioner.AskInt("Enter a value for y:", demotools.NotEmpty{})
  log.Printf("Invoking %v %v %v...", x, choices[choice], y)
  calcParameters := actions.CalculatorParameters{
   Action: choices[choice],
   X:      x,
   Y:      y,
  }
  invokeOutput := scenario.functionWrapper.Invoke(ctx, funcName, calcParameters,
 true)
  var payload any
  if choice == 3 { // divide-by results in a float.
   payload = actions.LambdaResultFloat{}
  } else {
   payload = actions.LambdaResultInt{}
  }
  err := json.Unmarshal(invokeOutput.Payload, &payload)
  if err != nil {
   log.Panicf("Couldn't unmarshal payload from invoking %v. Here's why: %v\n",
    funcName, err)
  }
```

```
  log.Printf("Invoking %v with %v %v %v returned %v.\n", funcName,
   calcParameters.X, calcParameters.Action, calcParameters.Y, payload)
  scenario.questioner.Ask("Press Enter to see the logs from the call.")
  logRes, err := base64.StdEncoding.DecodeString(*invokeOutput.LogResult)
  if err != nil {
   log.Panicf("Couldn't decode log result. Here's why: %v\n", err)
  }
  log.Println(string(logRes))
  wantInvoke = scenario.questioner.AskBool("Do you want to calculate again? (y/n)",
 "y")
 }
 log.Println(strings.Repeat("-", 88))
}

// ListFunctions lists up to the specified number of functions for your account.
func (scenario GetStartedFunctionsScenario) ListFunctions(ctx context.Context) {
 count := scenario.questioner.AskInt(
  "Let's list functions for your account. How many do you want to see?",
 demotools.NotEmpty{})
 functions := scenario.functionWrapper.ListFunctions(ctx, count)
 log.Printf("Found %v functions:", len(functions))
 for _, function := range functions {
  log.Printf("\t%v", *function.FunctionName)
 }
 log.Println(strings.Repeat("-", 88))
}

// Cleanup removes the IAM and Lambda resources created by the example.
func (scenario GetStartedFunctionsScenario) Cleanup(ctx context.Context, role
 *iamtypes.Role, funcName string) {
 if scenario.questioner.AskBool("Do you want to clean up resources created for this
 example? (y/n)",
  "y") {
  iamClient := iam.NewFromConfig(scenario.sdkConfig)
  policiesOutput, err := iamClient.ListAttachedRolePolicies(ctx,
   &iam.ListAttachedRolePoliciesInput{RoleName: role.RoleName})
  if err != nil {
   log.Panicf("Couldn't get policies attached to role %v. Here's why: %v\n",
    *role.RoleName, err)
  }
  for _, policy := range policiesOutput.AttachedPolicies {
   _, err = iamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
    PolicyArn: policy.PolicyArn, RoleName: role.RoleName,
   })
```

```
   if err != nil {
    log.Panicf("Couldn't detach policy %v from role %v. Here's why: %v\n",
     *policy.PolicyArn, *role.RoleName, err)
   }
  }
  _, err = iamClient.DeleteRole(ctx, &iam.DeleteRoleInput{RoleName: role.RoleName})
  if err != nil {
   log.Panicf("Couldn't delete role %v. Here's why: %v\n", *role.RoleName, err)
  }
  log.Printf("Deleted role %v.\n", *role.RoleName)

  scenario.functionWrapper.DeleteFunction(ctx, funcName)
  log.Printf("Deleted function %v.\n", funcName)
 } else {
  log.Println("Okay. Don't forget to delete the resources when you're done with
 them.")
 }
}

// IScenarioHelper abstracts I/O and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 CreateDeploymentPackage(sourceFile string, destinationFile string) *bytes.Buffer
}

// ScenarioHelper lets the caller specify the path to Lambda handler functions.
type ScenarioHelper struct {
 HandlerPath string
}

// Pause waits for the specified number of seconds.
func (helper *ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}

// CreateDeploymentPackage creates an AWS Lambda deployment package from a source
 file. The
// deployment package is stored in .zip format in a bytes.Buffer. The buffer can be
// used to pass a []byte to Lambda when creating the function.
// The specified destinationFile is the name to give the file when it's deployed to
 Lambda.
func (helper *ScenarioHelper) CreateDeploymentPackage(sourceFile string,
 destinationFile string) *bytes.Buffer {
```

```
 var err error
 buffer := &bytes.Buffer{}
 writer := zip.NewWriter(buffer)
 zFile, err := writer.Create(destinationFile)
 if err != nil {
  log.Panicf("Couldn't create destination archive %v. Here's why: %v\n",
 destinationFile, err)
 }
 sourceBody, err := os.ReadFile(fmt.Sprintf("%v/%v", helper.HandlerPath,
 sourceFile))
 if err != nil {
  log.Panicf("Couldn't read handler source file %v. Here's why: %v\n",
   sourceFile, err)
 } else {
  _, err = zFile.Write(sourceBody)
  if err != nil {
   log.Panicf("Couldn't write handler %v to zip archive. Here's why: %v\n",
    sourceFile, err)
  }
 }
 err = writer.Close()
 if err != nil {
  log.Panicf("Couldn't close zip writer. Here's why: %v\n", err)
 }
 return buffer
}
```

Créez une structure qui englobe les actions Lambda individuelles.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
```

```
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}


// GetFunction gets data about the Lambda function specified by functionName.
func (wrapper FunctionWrapper) GetFunction(ctx context.Context, functionName string)
 types.State {
 var state types.State
 funcOutput, err := wrapper.LambdaClient.GetFunction(ctx, &lambda.GetFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't get function %v. Here's why: %v\n", functionName, err)
 } else {
  state = funcOutput.Configuration.State
 }
 return state
}



// CreateFunction creates a new Lambda function from code contained in the
 zipPackage
// buffer. The specified handlerName must match the name of the file and function
// contained in the uploaded code. The role specified by iamRoleArn is assumed by
// Lambda and grants specific permissions.
// When the function already exists, types.StateActive is returned.
// When the function is created, a lambda.FunctionActiveV2Waiter is used to wait
 until the
// function is active.
func (wrapper FunctionWrapper) CreateFunction(ctx context.Context, functionName
 string, handlerName string,
 iamRoleArn *string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.CreateFunction(ctx, &lambda.CreateFunctionInput{
  Code:         &types.FunctionCode{ZipFile: zipPackage.Bytes()},
  FunctionName: aws.String(functionName),
  Role:         iamRoleArn,
  Handler:      aws.String(handlerName),
```

```
  Publish:      true,
  Runtime:      types.RuntimePython39,
 })
 if err != nil {
  var resConflict *types.ResourceConflictException
  if errors.As(err, &resConflict) {
   log.Printf("Function %v already exists.\n", functionName)
   state = types.StateActive
  } else {
   log.Panicf("Couldn't create function %v. Here's why: %v\n", functionName, err)
  }
 } else {
  waiter := lambda.NewFunctionActiveV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}



// UpdateFunctionCode updates the code for the Lambda function specified by
 functionName.
// The existing code for the Lambda function is entirely replaced by the code in the
// zipPackage buffer. After the update action is called, a
 lambda.FunctionUpdatedV2Waiter
// is used to wait until the update is successful.
func (wrapper FunctionWrapper) UpdateFunctionCode(ctx context.Context, functionName
 string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.UpdateFunctionCode(ctx,
 &lambda.UpdateFunctionCodeInput{
  FunctionName: aws.String(functionName), ZipFile: zipPackage.Bytes(),
 })
 if err != nil {
  log.Panicf("Couldn't update code for function %v. Here's why: %v\n", functionName,
 err)
 } else {
```

```
  waiter := lambda.NewFunctionUpdatedV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}



// UpdateFunctionConfiguration updates a map of environment variables configured for
// the Lambda function specified by functionName.
func (wrapper FunctionWrapper) UpdateFunctionConfiguration(ctx context.Context,
 functionName string, envVars map[string]string) {
 _, err := wrapper.LambdaClient.UpdateFunctionConfiguration(ctx,
 &lambda.UpdateFunctionConfigurationInput{
  FunctionName: aws.String(functionName),
  Environment:  &types.Environment{Variables: envVars},
 })
 if err != nil {
  log.Panicf("Couldn't update configuration for %v. Here's why: %v", functionName,
 err)
 }
}



// ListFunctions lists up to maxItems functions for the account. This function uses
 a
// lambda.ListFunctionsPaginator to paginate the results.
func (wrapper FunctionWrapper) ListFunctions(ctx context.Context, maxItems int)
 []types.FunctionConfiguration {
 var functions []types.FunctionConfiguration
 paginator := lambda.NewListFunctionsPaginator(wrapper.LambdaClient,
 &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
 })
 for paginator.HasMorePages() && len(functions) < maxItems {
  pageOutput, err := paginator.NextPage(ctx)
```

```
  if err != nil {
   log.Panicf("Couldn't list functions for your account. Here's why: %v\n", err)
  }
  functions = append(functions, pageOutput.Functions...)
 }
 return functions
}



// DeleteFunction deletes the Lambda function specified by functionName.
func (wrapper FunctionWrapper) DeleteFunction(ctx context.Context, functionName
 string) {
 _, err := wrapper.LambdaClient.DeleteFunction(ctx, &lambda.DeleteFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't delete function %v. Here's why: %v\n", functionName, err)
 }
}



// Invoke invokes the Lambda function specified by functionName, passing the
 parameters
// as a JSON payload. When getLog is true, types.LogTypeTail is specified, which
 tells
// Lambda to include the last few log lines in the returned result.
func (wrapper FunctionWrapper) Invoke(ctx context.Context, functionName string,
 parameters any, getLog bool) *lambda.InvokeOutput {
 logType := types.LogTypeNone
 if getLog {
  logType = types.LogTypeTail
 }
 payload, err := json.Marshal(parameters)
 if err != nil {
  log.Panicf("Couldn't marshal parameters to JSON. Here's why %v\n", err)
 }
 invokeOutput, err := wrapper.LambdaClient.Invoke(ctx, &lambda.InvokeInput{
  FunctionName: aws.String(functionName),
  LogType:      logType,
  Payload:      payload,
 })
 if err != nil {
```

```
  log.Panicf("Couldn't invoke function %v. Here's why: %v\n", functionName, err)
 }
 return invokeOutput
}



// IncrementParameters is used to serialize parameters to the increment Lambda
 handler.
type IncrementParameters struct {
 Action string `json:"action"`
 Number int    `json:"number"`
}

// CalculatorParameters is used to serialize parameters to the calculator Lambda
 handler.
type CalculatorParameters struct {
 Action string `json:"action"`
 X      int    `json:"x"`
 Y      int    `json:"y"`
}

// LambdaResultInt is used to deserialize an int result from a Lambda handler.
type LambdaResultInt struct {
 Result int `json:"result"`
}

// LambdaResultFloat is used to deserialize a float32 result from a Lambda handler.
type LambdaResultFloat struct {
 Result float32 `json:"result"`
}
```

Définir un gestionnaire Lambda qui incrémente un nombre.

```
import logging

logger = logging.getLogger()
logger.setLevel(logging.INFO)


def lambda_handler(event, context):
```

```
    """
    Accepts an action and a single number, performs the specified action on the
 number,
    and returns the result. The only allowable action is 'increment'.

    :param event: The event dict that contains the parameters sent when the function
                  is invoked.
    :param context: The context in which the function is called.
    :return: The result of the action.
    """
    result = None
    action = event.get("action")
    if action == "increment":
        result = event.get("number", 0) + 1
        logger.info("Calculated result of %s", result)
    else:
        logger.error("%s is not a valid action.", action)

    response = {"result": result}
    return response
```

Définir un deuxième gestionnaire Lambda qui effectue des opérations arithmétiques.

```
import logging
import os


logger = logging.getLogger()

# Define a list of Python lambda functions that are called by this AWS Lambda
 function.
ACTIONS = {
    "plus": lambda x, y: x + y,
    "minus": lambda x, y: x - y,
    "times": lambda x, y: x * y,
    "divided-by": lambda x, y: x / y,
}


def lambda_handler(event, context):
```

```
    """
    Accepts an action and two numbers, performs the specified action on the numbers,
    and returns the result.

    :param event: The event dict that contains the parameters sent when the function
                  is invoked.
    :param context: The context in which the function is called.
    :return: The result of the specified action.
    """
    # Set the log level based on a variable configured in the Lambda environment.
    logger.setLevel(os.environ.get("LOG_LEVEL", logging.INFO))
    logger.debug("Event: %s", event)

    action = event.get("action")
    func = ACTIONS.get(action)
    x = event.get("x")
    y = event.get("y")
    result = None
    try:
        if func is not None and x is not None and y is not None:
            result = func(x, y)
            logger.info("%s %s %s is %s", x, action, y, result)
        else:
            logger.error("I can't calculate %s %s %s.", x, action, y)
    except ZeroDivisionError:
        logger.warning("I can't divide %s by 0!", x)

    response = {"result": result}
    return response
```

- Pour plus d'informations sur l'API, consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CreateFunction
  - DeleteFunction
  - GetFunction
  - Invoke
  - ListFunctions
  - UpdateFunctionCode

- UpdateFunctionConfiguration

Actions

`CreateFunction`

L'exemple de code suivant montre comment utiliser`CreateFunction`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// CreateFunction creates a new Lambda function from code contained in the
 zipPackage
// buffer. The specified handlerName must match the name of the file and function
```

```
// contained in the uploaded code. The role specified by iamRoleArn is assumed by
// Lambda and grants specific permissions.
// When the function already exists, types.StateActive is returned.
// When the function is created, a lambda.FunctionActiveV2Waiter is used to wait
 until the
// function is active.
func (wrapper FunctionWrapper) CreateFunction(ctx context.Context, functionName
 string, handlerName string,
 iamRoleArn *string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.CreateFunction(ctx, &lambda.CreateFunctionInput{
  Code:         &types.FunctionCode{ZipFile: zipPackage.Bytes()},
  FunctionName: aws.String(functionName),
  Role:         iamRoleArn,
  Handler:      aws.String(handlerName),
  Publish:      true,
  Runtime:      types.RuntimePython39,
 })
 if err != nil {
  var resConflict *types.ResourceConflictException
  if errors.As(err, &resConflict) {
   log.Printf("Function %v already exists.\n", functionName)
   state = types.StateActive
  } else {
   log.Panicf("Couldn't create function %v. Here's why: %v\n", functionName, err)
  }
 } else {
  waiter := lambda.NewFunctionActiveV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}
```

- Pour plus de détails sur l'API, reportez-vous CreateFunctionà la section Référence des AWS SDK pour Go API.

`DeleteFunction`

L'exemple de code suivant montre comment utiliser`DeleteFunction`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// DeleteFunction deletes the Lambda function specified by functionName.
func (wrapper FunctionWrapper) DeleteFunction(ctx context.Context, functionName
 string) {
 _, err := wrapper.LambdaClient.DeleteFunction(ctx, &lambda.DeleteFunctionInput{
  FunctionName: aws.String(functionName),
```

```
 })
 if err != nil {
  log.Panicf("Couldn't delete function %v. Here's why: %v\n", functionName, err)
 }
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteFunctionà la section Référence des AWS SDK pour Go API.

`GetFunction`

L'exemple de code suivant montre comment utiliser`GetFunction`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
```

```
}



// GetFunction gets data about the Lambda function specified by functionName.
func (wrapper FunctionWrapper) GetFunction(ctx context.Context, functionName string)
 types.State {
 var state types.State
 funcOutput, err := wrapper.LambdaClient.GetFunction(ctx, &lambda.GetFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't get function %v. Here's why: %v\n", functionName, err)
 } else {
  state = funcOutput.Configuration.State
 }
 return state
}
```

- Pour plus de détails sur l'API, reportez-vous GetFunctionà la section Référence des AWS SDK pour Go API.

`Invoke`

L'exemple de code suivant montre comment utiliser`Invoke`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
```

```
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// Invoke invokes the Lambda function specified by functionName, passing the
 parameters
// as a JSON payload. When getLog is true, types.LogTypeTail is specified, which
 tells
// Lambda to include the last few log lines in the returned result.
func (wrapper FunctionWrapper) Invoke(ctx context.Context, functionName string,
 parameters any, getLog bool) *lambda.InvokeOutput {
 logType := types.LogTypeNone
 if getLog {
  logType = types.LogTypeTail
 }
 payload, err := json.Marshal(parameters)
 if err != nil {
  log.Panicf("Couldn't marshal parameters to JSON. Here's why %v\n", err)
 }
 invokeOutput, err := wrapper.LambdaClient.Invoke(ctx, &lambda.InvokeInput{
  FunctionName: aws.String(functionName),
  LogType:      logType,
  Payload:      payload,
 })
 if err != nil {
  log.Panicf("Couldn't invoke function %v. Here's why: %v\n", functionName, err)
 }
 return invokeOutput
}
```

- Pour en savoir plus sur l'API, consultez Invoke dans la Référence de l'API AWS SDK pour Go .

`ListFunctions`

L'exemple de code suivant montre comment utiliser`ListFunctions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// ListFunctions lists up to maxItems functions for the account. This function uses
 a
// lambda.ListFunctionsPaginator to paginate the results.
```

```
func (wrapper FunctionWrapper) ListFunctions(ctx context.Context, maxItems int)
 []types.FunctionConfiguration {
 var functions []types.FunctionConfiguration
 paginator := lambda.NewListFunctionsPaginator(wrapper.LambdaClient,
 &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
 })
 for paginator.HasMorePages() && len(functions) < maxItems {
  pageOutput, err := paginator.NextPage(ctx)
  if err != nil {
   log.Panicf("Couldn't list functions for your account. Here's why: %v\n", err)
  }
  functions = append(functions, pageOutput.Functions...)
 }
 return functions
}
```

- Pour plus de détails sur l'API, reportez-vous ListFunctionsà la section Référence des AWS SDK pour Go API.

`UpdateFunctionCode`

L'exemple de code suivant montre comment utiliser`UpdateFunctionCode`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
```

```
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// UpdateFunctionCode updates the code for the Lambda function specified by
 functionName.
// The existing code for the Lambda function is entirely replaced by the code in the
// zipPackage buffer. After the update action is called, a
 lambda.FunctionUpdatedV2Waiter
// is used to wait until the update is successful.
func (wrapper FunctionWrapper) UpdateFunctionCode(ctx context.Context, functionName
 string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.UpdateFunctionCode(ctx,
 &lambda.UpdateFunctionCodeInput{
  FunctionName: aws.String(functionName), ZipFile: zipPackage.Bytes(),
 })
 if err != nil {
  log.Panicf("Couldn't update code for function %v. Here's why: %v\n", functionName,
 err)
 } else {
  waiter := lambda.NewFunctionUpdatedV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}
```

- Pour plus de détails sur l'API, reportez-vous UpdateFunctionCodeà la section Référence des AWS SDK pour Go API.

`UpdateFunctionConfiguration`

L'exemple de code suivant montre comment utiliser`UpdateFunctionConfiguration`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// UpdateFunctionConfiguration updates a map of environment variables configured for
```

```
// the Lambda function specified by functionName.
func (wrapper FunctionWrapper) UpdateFunctionConfiguration(ctx context.Context,
 functionName string, envVars map[string]string) {
 _, err := wrapper.LambdaClient.UpdateFunctionConfiguration(ctx,
 &lambda.UpdateFunctionConfigurationInput{
  FunctionName: aws.String(functionName),
  Environment:  &types.Environment{Variables: envVars},
 })
 if err != nil {
  log.Panicf("Couldn't update configuration for %v. Here's why: %v", functionName,
 err)
 }
}
```

- Pour plus de détails sur l'API, reportez-vous UpdateFunctionConfigurationà la section Référence des AWS SDK pour Go API.

Scénarios

Confirmation automatique des utilisateurs connus avec une fonction Lambda

L'exemple de code suivant montre comment confirmer automatiquement les utilisateurs connus d'Amazon Cognito à l'aide d'une fonction Lambda.

- Configurez un groupe d'utilisateurs pour appeler une fonction Lambda pour le déclencheur `PreSignUp`.
- Inscription d'un utilisateur avec Amazon Cognito.
- La fonction Lambda analyse une table DynamoDB et confirme automatiquement les utilisateurs connus.
- Connectez-vous en tant que nouvel utilisateur, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// AutoConfirm separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type AutoConfirm struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewAutoConfirm constructs a new auto confirm runner.
func NewAutoConfirm(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) AutoConfirm {
 scenario := AutoConfirm{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddPreSignUpTrigger adds a Lambda handler as an invocation target for the
 PreSignUp trigger.
func (runner *AutoConfirm) AddPreSignUpTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
```

```
 log.Printf("Let's add a Lambda function to handle the PreSignUp trigger from
 Cognito.\n" +
  "This trigger happens when a user signs up, and lets your function take action
 before the main Cognito\n" +
  "sign up processing occurs.\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PreSignUp, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the PreSignUp
 trigger.\n",
  functionArn, userPoolId)
}

// SignUpUser signs up a user from the known user table with a password you specify.
func (runner *AutoConfirm) SignUpUser(ctx context.Context, clientId string,
 usersTable string) (string, string) {
 log.Println("Let's sign up a user to your Cognito user pool. When the user's email
 matches an email in the\n" +
  "DynamoDB known users table, it is automatically verified and the user is
 confirmed.")

 knownUsers, err := runner.helper.GetKnownUsers(ctx, usersTable)
 if err != nil {
  panic(err)
 }
 userChoice := runner.questioner.AskChoice("Which user do you want to use?\n",
 knownUsers.UserNameList())
 user := knownUsers.Users[userChoice]

 var signedUp bool
 var userConfirmed bool
 password := runner.questioner.AskPassword("Enter a password that has at least eight
 characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !signedUp {
  log.Printf("Signing up user '%v' with email '%v' to Cognito.\n", user.UserName,
 user.UserEmail)
  userConfirmed, err = runner.cognitoActor.SignUp(ctx, clientId, user.UserName,
 password, user.UserEmail)
  if err != nil {
```

```
    var invalidPassword *types.InvalidPasswordException
    if errors.As(err, &invalidPassword) {
     password = runner.questioner.AskPassword("Enter another password:", 8)
    } else {
     panic(err)
    }
   } else {
    signedUp = true
   }
  }
  log.Printf("User %v signed up, confirmed = %v.\n", user.UserName, userConfirmed)

  log.Println(strings.Repeat("-", 88))

  return user.UserName, password
}

// SignInUser signs in a user.
func (runner *AutoConfirm) SignInUser(ctx context.Context, clientId string, userName
 string, password string) string {
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 log.Printf("Let's sign in as %v...\n", userName)
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 log.Println(strings.Repeat("-", 88))
 return *authResult.AccessToken
}

// Run runs the scenario.
func (runner *AutoConfirm) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")
```

```
 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])

 runner.AddPreSignUpTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["AutoConfirmFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers, actions.PreSignUp)
 userName, password := runner.SignUpUser(ctx, stackOutputs["UserPoolClientId"],
 stackOutputs["TableName"])
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["AutoConfirmFunction"])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
  runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password))

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `PreSignUp` avec une fonction Lambda.

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PreSignUp event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be confirmed and verified.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsPreSignup) (events.CognitoEventUserPoolsPreSignup,
 error) {
 log.Printf("Received presignup from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "PreSignUp_SignUp" {
  // Other trigger sources, such as PreSignUp_AdminInitiateAuth, ignore the response
 from this handler.
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserEmail: event.Request.UserAttributes["email"],
 }
 log.Printf("Looking up email %v in table %v.\n", user.UserEmail, tableName)
 output, err := h.dynamoClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key:       user.GetKey(),
  TableName: aws.String(tableName),
```

```
 })
 if err != nil {
  log.Printf("Error looking up email %v.\n", user.UserEmail)
  return event, err
 }
 if output.Item == nil {
  log.Printf("Email %v not found. Email verification is required.\n",
 user.UserEmail)
  return event, err
 }

 err = attributevalue.UnmarshalMap(output.Item, &user)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB item. Here's why: %v\n", err)
  return event, err
 }

 if user.UserName != event.UserName {
  log.Printf("UserEmail %v found, but stored UserName '%v' does not match supplied
 UserName '%v'. Verification is required.\n",
   user.UserEmail, user.UserName, event.UserName)
 } else {
  log.Printf("UserEmail %v found with matching UserName %v. User is confirmed.\n",
 user.UserEmail, user.UserName)
  event.Response.AutoConfirmUser = true
  event.Response.AutoVerifyEmail = true
 }

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
```

```
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
```

```
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
```

```
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
```

```
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
```

```
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
```

```
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
```

```
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
```

```
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
```

```
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
```

```
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
```

```
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}
```

```
// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - DeleteUser
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Migration automatique des utilisateurs connus avec une fonction Lambda

L'exemple de code suivant illustre comment effectuer automatiquement une migration des utilisateurs Amazon Cognito connus avec une fonction Lambda.

- Configurez un groupe d'utilisateurs pour appeler une fonction Lambda pour le déclencheur `MigrateUser`.
- Connectez-vous à Amazon Cognito avec un nom d'utilisateur et une adresse e-mail qui ne figurent pas dans le groupe d'utilisateurs.
- La fonction Lambda analyse une table DynamoDB et transfère automatiquement les utilisateurs connus vers le groupe d'utilisateurs.
- Exécutez le flux de mots de passe oubliés pour réinitialiser le mot de passe de l'utilisateur soumis à la migration.
- Connectez-vous en tant que nouvel utilisateur, puis nettoyez les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "fmt"
```

```
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// MigrateUser separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type MigrateUser struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewMigrateUser constructs a new migrate user runner.
func NewMigrateUser(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) MigrateUser {
 scenario := MigrateUser{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddMigrateUserTrigger adds a Lambda handler as an invocation target for the
 MigrateUser trigger.
func (runner *MigrateUser) AddMigrateUserTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the MigrateUser trigger from
 Cognito.\n" +
  "This trigger happens when an unknown user signs in, and lets your function take
 action before Cognito\n" +
  "rejects the user.\n\n")
 err := runner.cognitoActor.UpdateTriggers(
```

```
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.UserMigration, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the MigrateUser
 trigger.\n",
  functionArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser adds a new user to the known users table and signs that user in to
 Amazon Cognito.
func (runner *MigrateUser) SignInUser(ctx context.Context, usersTable string,
 clientId string) (bool, actions.User) {
 log.Println("Let's sign in a user to your Cognito user pool. When the username and
 email matches an entry in the\n" +
  "DynamoDB known users table, the email is automatically verified and the user is
 migrated to the Cognito user pool.")

 user := actions.User{}
 user.UserName = runner.questioner.Ask("\nEnter a username:")
 user.UserEmail = runner.questioner.Ask("\nEnter an email that you own. This email
 will be used to confirm user migration\n" +
  "during this example:")

 runner.helper.AddKnownUser(ctx, usersTable, user)

 var err error
 var resetRequired *types.PasswordResetRequiredException
 var authResult *types.AuthenticationResultType
 signedIn := false
 for !signedIn && resetRequired == nil {
  log.Printf("Signing in to Cognito as user '%v'. The expected result is a
 PasswordResetRequiredException.\n\n", user.UserName)
  authResult, err = runner.cognitoActor.SignIn(ctx, clientId, user.UserName, "_")
  if err != nil {
   if errors.As(err, &resetRequired) {
    log.Printf("\nUser '%v' is not in the Cognito user pool but was found in the
 DynamoDB known users table.\n"+
     "User migration is started and a password reset is required.", user.UserName)
   } else {
```

```
    panic(err)
   }
  } else {
   log.Printf("User '%v' successfully signed in. This is unexpected and probably
 means you have not\n"+
    "cleaned up a previous run of this scenario, so the user exist in the Cognito
 user pool.\n"+
    "You can continue this example and select to clean up resources, or manually
 remove\n"+
    "the user from your user pool and try again.", user.UserName)
   runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
   signedIn = true
  }
 }

 log.Println(strings.Repeat("-", 88))
 return resetRequired != nil, user
}

// ResetPassword starts a password recovery flow.
func (runner *MigrateUser) ResetPassword(ctx context.Context, clientId string, user
 actions.User) {
 wantCode := runner.questioner.AskBool(fmt.Sprintf("In order to migrate the user to
 Cognito, you must be able to receive a confirmation\n"+
  "code by email at %v. Do you want to send a code (y/n)?", user.UserEmail), "y")
 if !wantCode {
  log.Println("To complete this example and successfully migrate a user to Cognito,
 you must enter an email\n" +
   "you own that can receive a confirmation code.")
  return
 }
 codeDelivery, err := runner.cognitoActor.ForgotPassword(ctx, clientId,
 user.UserName)
 if err != nil {
  panic(err)
 }
 log.Printf("\nA confirmation code has been sent to %v.", *codeDelivery.Destination)
 code := runner.questioner.Ask("Check your email and enter it here:")

 confirmed := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
```

```
 for !confirmed {
  log.Printf("\nConfirming password reset for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.ConfirmForgotPassword(ctx, clientId, code,
 user.UserName, password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   confirmed = true
  }
 }
 log.Printf("User '%v' successfully confirmed and migrated.\n", user.UserName)
 log.Println("Signing in with your username and password...")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, user.UserName,
 password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)

 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *MigrateUser) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))
```

```
 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]

 runner.AddMigrateUserTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["MigrateUserFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers,
 actions.UserMigration)
 resetNeeded, user := runner.SignInUser(ctx, stackOutputs["TableName"],
 stackOutputs["UserPoolClientId"])
 if resetNeeded {
  runner.helper.ListRecentLogEvents(ctx, stackOutputs["MigrateUserFunction"])
  runner.ResetPassword(ctx, stackOutputs["UserPoolClientId"], user)
 }

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `MigrateUser` avec une fonction Lambda.

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
)
```

```
const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the MigrateUser event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be migrated to the user pool.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsMigrateUser) (events.CognitoEventUserPoolsMigrateUser,
 error) {
 log.Printf("Received migrate trigger from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "UserMigration_Authentication" {
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName: event.UserName,
 }
 log.Printf("Looking up user '%v' in table %v.\n", user.UserName, tableName)
 filterEx := expression.Name("UserName").Equal(expression.Value(user.UserName))
 expr, err := expression.NewBuilder().WithFilter(filterEx).Build()
 if err != nil {
  log.Printf("Error building expression to query for user '%v'.\n", user.UserName)
  return event, err
 }
 output, err := h.dynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName:                 aws.String(tableName),
  FilterExpression:          expr.Filter(),
  ExpressionAttributeNames:  expr.Names(),
  ExpressionAttributeValues: expr.Values(),
 })
 if err != nil {
  log.Printf("Error looking up user '%v'.\n", user.UserName)
  return event, err
```

```
 }
 if len(output.Items) == 0 {
  log.Printf("User '%v' not found, not migrating user.\n", user.UserName)
  return event, err
 }

 var users []UserInfo
 err = attributevalue.UnmarshalListOfMaps(output.Items, &users)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB items. Here's why: %v\n", err)
  return event, err
 }

 user = users[0]
 log.Printf("UserName '%v' found with email %v. User is migrated and must reset
 password.\n", user.UserName, user.UserEmail)
 event.CognitoEventUserPoolsMigrateUserResponse.UserAttributes = map[string]string{
  "email":          user.UserEmail,
  "email_verified": "true", // email_verified is required for the forgot password
 flow.
 }
 event.CognitoEventUserPoolsMigrateUserResponse.FinalUserStatus = "RESET_REQUIRED"
 event.CognitoEventUserPoolsMigrateUserResponse.MessageAction = "SUPPRESS"

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
```

```
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}
```

```
// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
```

```
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
```

```
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
```

```
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}
```

```
// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
```

```
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
```

```
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
```

```
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
 "context"
 "fmt"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
```

```
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
```

```
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - ConfirmForgotPassword
  - DeleteUser
  - ForgotPassword
  - InitiateAuth

- SignUp
- UpdateUserPool

Rédaction de données d'activité personnalisées à l'aide d'une fonction Lambda après authentification de l'utilisateur Amazon Cognito

L'exemple de code suivant illustre comment écrire des données d'activité personnalisées avec une fonction Lambda après l'authentification utilisateur Amazon Cognito.

- Utilisez les fonctions d'administrateur pour ajouter un utilisateur à un groupe d'utilisateurs.
- Configurez un groupe d'utilisateurs pour appeler une fonction Lambda pour le déclencheur `PostAuthentication`.
- Inscrivez le nouvel utilisateur dans Amazon Cognito.
- La fonction Lambda écrit des informations personnalisées dans des CloudWatch journaux et dans une table DynamoDB.
- Obtenez et affichez les données personnalisées à partir de la table DynamoDB, puis nettoyer les ressources.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
```

```
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ActivityLog separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ActivityLog struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewActivityLog constructs a new activity log runner.
func NewActivityLog(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) ActivityLog {
 scenario := ActivityLog{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddUserToPool selects a user from the known users table and uses administrator
 credentials to add the user to the user pool.
func (runner *ActivityLog) AddUserToPool(ctx context.Context, userPoolId string,
 tableName string) (string, string) {
 log.Println("To facilitate this example, let's add a user to the user pool using
 administrator privileges.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 user := users.Users[0]
 log.Printf("Adding known user %v to the user pool.\n", user.UserName)
 err = runner.cognitoActor.AdminCreateUser(ctx, userPoolId, user.UserName,
 user.UserEmail)
 if err != nil {
  panic(err)
```

```
 }
 pwSet := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !pwSet {
  log.Printf("\nSetting password for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.AdminSetUserPassword(ctx, userPoolId, user.UserName,
 password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   pwSet = true
  }
 }

 log.Println(strings.Repeat("-", 88))

 return user.UserName, password
}

// AddActivityLogTrigger adds a Lambda handler as an invocation target for the
 PostAuthentication trigger.
func (runner *ActivityLog) AddActivityLogTrigger(ctx context.Context, userPoolId
 string, activityLogArn string) {
 log.Println("Let's add a Lambda function to handle the PostAuthentication trigger
 from Cognito.\n" +
  "This trigger happens after a user is authenticated, and lets your function take
 action, such as logging\n" +
  "the outcome.")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PostAuthentication, HandlerArn:
 aws.String(activityLogArn)})
 if err != nil {
  panic(err)
 }
 runner.resources.triggers = append(runner.resources.triggers,
 actions.PostAuthentication)
```

```
 log.Printf("Lambda function %v added to user pool %v to handle PostAuthentication
 Cognito trigger.\n",
  activityLogArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser signs in as the specified user.
func (runner *ActivityLog) SignInUser(ctx context.Context, clientId string, userName
 string, password string) {
 log.Printf("Now we'll sign in user %v and check the results in the logs and the
 DynamoDB table.", userName)
 runner.questioner.Ask("Press Enter when you're ready.")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Println("Sign in successful.",
  "The PostAuthentication Lambda handler writes custom information to CloudWatch
 Logs.")

 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
}

// GetKnownUserLastLogin gets the login info for a user from the Amazon DynamoDB
 table and displays it.
func (runner *ActivityLog) GetKnownUserLastLogin(ctx context.Context, tableName
 string, userName string) {
 log.Println("The PostAuthentication handler also writes login data to the DynamoDB
 table.")
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 for _, user := range users.Users {
  if user.UserName == userName {
   log.Println("The last login info for the user in the known users table is:")
   log.Printf("\t%+v", *user.LastLogin)
  }
 }
 log.Println(strings.Repeat("-", 88))
}
```

```
// Run runs the scenario.
func (runner *ActivityLog) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])
 userName, password := runner.AddUserToPool(ctx, stackOutputs["UserPoolId"],
 stackOutputs["TableName"])

 runner.AddActivityLogTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["ActivityLogFunctionArn"])
 runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password)
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["ActivityLogFunction"])
 runner.GetKnownUserLastLogin(ctx, stackOutputs["TableName"], userName)

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Gérez le déclencheur `PostAuthentication` avec une fonction Lambda.

```
import (
```

```
 "context"
 "fmt"
 "log"
 "os"
 "time"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

const TABLE_NAME = "TABLE_NAME"

// LoginInfo defines structured login data that can be marshalled to a DynamoDB
 format.
type LoginInfo struct {
 UserPoolId string `dynamodbav:"UserPoolId"`
 ClientId   string `dynamodbav:"ClientId"`
 Time       string `dynamodbav:"Time"`
}

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string    `dynamodbav:"UserName"`
 UserEmail string    `dynamodbav:"UserEmail"`
 LastLogin LoginInfo `dynamodbav:"LastLogin"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
```

```
}

// HandleRequest handles the PostAuthentication event by writing custom data to the
 logs and
// to an Amazon DynamoDB table.
func (h *handler) HandleRequest(ctx context.Context,
 event events.CognitoEventUserPoolsPostAuthentication)
 (events.CognitoEventUserPoolsPostAuthentication, error) {
 log.Printf("Received post authentication trigger from %v for user '%v'",
 event.TriggerSource, event.UserName)
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName:  event.UserName,
  UserEmail: event.Request.UserAttributes["email"],
  LastLogin: LoginInfo{
   UserPoolId: event.UserPoolID,
   ClientId:   event.CallerContext.ClientID,
   Time:       time.Now().Format(time.UnixDate),
  },
 }
 // Write to CloudWatch Logs.
 fmt.Printf("%#v", user)

 // Also write to an external system. This examples uses DynamoDB to demonstrate.
 userMap, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshal to DynamoDB map. Here's why: %v\n", err)
 } else if len(userMap) == 0 {
  log.Printf("User info marshaled to an empty map.")
 } else {
  _, err := h.dynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
   Item:      userMap,
   TableName: aws.String(tableName),
  })
  if err != nil {
   log.Printf("Couldn't write to DynamoDB. Here's why: %v\n", err)
  } else {
   log.Printf("Wrote user info to DynamoDB table %v.\n", tableName)
  }
 }

 return event, nil
}
```

```
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

Créez une structure qui exécute les tâches courantes.

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}
```

```
// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
```

```
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
```

```
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Créez une structure qui encapsule les actions Amazon Cognito.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
```

```
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
```

```
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
```

```
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
```

```
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
```

```
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

Créez une structure qui encapsule les actions DynamoDB.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
```

```
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
```

```
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

Créez une structure qui englobe les actions CloudWatch Logs.

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
```

```
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

Créez une structure qui englobe les actions. AWS CloudFormation

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
```

```
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
```

```
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
```

```
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - AdminCreateUser
  - AdminSetUserPassword
  - DeleteUser
  - InitiateAuth
  - UpdateUserPool

Exemples sans serveur

Connexion à une base de données Amazon RDS dans une fonction Lambda

L'exemple de code suivant montre comment implémenter une fonction Lambda qui se connecte à une base de données RDS. La fonction effectue une simple requête de base de données et renvoie le résultat.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Connexion à une base de données Amazon RDS dans une fonction Lambda à l'aide de Go.

```
/*
Golang v2 code here.
*/
```

```
package main

import (
 "context"
 "database/sql"
 "encoding/json"
 "fmt"
 "os"

 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
 _ "github.com/go-sql-driver/mysql"
)

type MyEvent struct {
 Name string `json:"name"`
}

func HandleRequest(event *MyEvent) (map[string]interface{}, error) {

 var dbName string = os.Getenv("DatabaseName")
 var dbUser string = os.Getenv("DatabaseUser")
 var dbHost string = os.Getenv("DBHost") // Add hostname without https
 var dbPort int = os.Getenv("Port")      // Add port number
 var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
 var region string = os.Getenv("AWS_REGION")

 cfg, err := config.LoadDefaultConfig(context.TODO())
 if err != nil {
  panic("configuration error: " + err.Error())
 }

 authenticationToken, err := auth.BuildAuthToken(
  context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
 if err != nil {
  panic("failed to create authentication token: " + err.Error())
 }

 dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
  dbUser, authenticationToken, dbEndpoint, dbName,
 )
```

```
 db, err := sql.Open("mysql", dsn)
 if err != nil {
  panic(err)
 }

 defer db.Close()

 var sum int
 err = db.QueryRow("SELECT ?+? AS sum", 3, 2).Scan(&sum)
 if err != nil {
  panic(err)
 }
 s := fmt.Sprint(sum)
 message := fmt.Sprintf("The selected sum is: %s", s)

 messageBytes, err := json.Marshal(message)
 if err != nil {
  return nil, err
 }

 messageString := string(messageBytes)
 return map[string]interface{}{
  "statusCode": 200,
  "headers":    map[string]string{"Content-Type": "application/json"},
  "body":       messageString,
 }, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

Invoquer une fonction Lambda à partir d’un déclencheur Kinesis

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements provenant d'un flux Kinesis. La fonction récupère la charge utile Kinesis, décode à partir de Base64 et enregistre le contenu de l’enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement Kinesis avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent) error {
 if len(kinesisEvent.Records) == 0 {
  log.Printf("empty Kinesis event received")
  return nil
 }

 for _, record := range kinesisEvent.Records {
  log.Printf("processed Kinesis event with EventId: %v", record.EventID)
  recordDataBytes := record.Kinesis.Data
  recordDataText := string(recordDataBytes)
  log.Printf("record data: %v", recordDataText)
  // TODO: Do interesting work based on the new data
 }
 log.Printf("successfully processed %v records", len(kinesisEvent.Records))
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Invocation d'une fonction Lambda à partir d'un déclencheur DynamoDB

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements d'un flux DynamoDB. La fonction récupère les données utiles DynamoDB et journalise le contenu de l'enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement DynamoDB avec Lambda en utilisant Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-lambda-go/events"
 "fmt"
)

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*string, error)
 {
 if len(event.Records) == 0 {
  return nil, fmt.Errorf("received empty event")
 }

 for _, record := range event.Records {
   LogDynamoDBRecord(record)
 }

 message := fmt.Sprintf("Records processed: %d", len(event.Records))
 return &message, nil
```

```
}

func main() {
 lambda.Start(HandleRequest)
}

func LogDynamoDBRecord(record events.DynamoDBEventRecord){
 fmt.Println(record.EventID)
 fmt.Println(record.EventName)
 fmt.Printf("%+v\n", record.Change)
}
```

Invocation d'une fonction Lambda à partir d'un déclencheur Amazon DocumentDB

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements provenant d'un flux de modifications DocumentDB. La fonction récupère les données utiles DocumentDB et journalise le contenu de l'enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement Amazon DocumentDB avec Lambda en utilisant Go.

```
package main

import (
 "context"
 "encoding/json"
 "fmt"

 "github.com/aws/aws-lambda-go/lambda"
)

type Event struct {
```

```
 Events []Record `json:"events"`
}

type Record struct {
 Event struct {
  OperationType string `json:"operationType"`
  NS            struct {
   DB   string `json:"db"`
   Coll string `json:"coll"`
  } `json:"ns"`
  FullDocument interface{} `json:"fullDocument"`
 } `json:"event"`
}

func main() {
 lambda.Start(handler)
}

func handler(ctx context.Context, event Event) (string, error) {
 fmt.Println("Loading function")
 for _, record := range event.Events {
  logDocumentDBEvent(record)
 }

 return "OK", nil
}

func logDocumentDBEvent(record Record) {
 fmt.Printf("Operation type: %s\n", record.Event.OperationType)
 fmt.Printf("db: %s\n", record.Event.NS.DB)
 fmt.Printf("collection: %s\n", record.Event.NS.Coll)
 docBytes, _ := json.MarshalIndent(record.Event.FullDocument, "", "  ")
 fmt.Printf("Full document: %s\n", string(docBytes))
}
```

Invocation d’une fonction Lambda à partir d’un déclencheur Amazon MSK

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements d'un cluster Amazon MSK. La fonction récupère les données utiles MSK et journalise le contenu de l’enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement Amazon MSK avec Lambda en utilisant Go.

```
package main

import (
 "encoding/base64"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.KafkaEvent) {
 for key, records := range event.Records {
  fmt.Println("Key:", key)

  for _, record := range records {
   fmt.Println("Record:", record)

   decodedValue, _ := base64.StdEncoding.DecodeString(record.Value)
   message := string(decodedValue)
   fmt.Println("Message:", message)
  }
 }
}

func main() {
 lambda.Start(handler)
}
```

Invoquer une fonction lambda à partir d'un déclencheur Amazon S3

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par le téléchargement d'un objet dans un compartiment S3. La fonction extrait le nom du compartiment S3 et la clé de l'objet à partir du paramètre d'événement et appelle l'API Amazon S3 pour récupérer et consigner le type de contenu de l'objet.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Utilisation d'un événement S3 avec Lambda en utilisant Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

func handler(ctx context.Context, s3Event events.S3Event) error {
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Printf("failed to load default config: %s", err)
  return err
 }
 s3Client := s3.NewFromConfig(sdkConfig)

 for _, record := range s3Event.Records {
  bucket := record.S3.Bucket.Name
  key := record.S3.Object.URLDecodedKey
```

```
  headOutput, err := s3Client.HeadObject(ctx, &s3.HeadObjectInput{
   Bucket: &bucket,
   Key:    &key,
  })
  if err != nil {
   log.Printf("error getting head of object %s/%s: %s", bucket, key, err)
   return err
  }
  log.Printf("successfully retrieved %s/%s of type %s", bucket, key,
 *headOutput.ContentType)
 }

 return nil
}

func main() {
 lambda.Start(handler)
}
```

Invocation d'une fonction lambda à partir d'un déclencheur Amazon SNS

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception de messages provenant d'une rubrique SNS. La fonction extrait les messages du paramètre d'événement et consigne le contenu de chaque message.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement SNS avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
```

```
 "context"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, snsEvent events.SNSEvent) {
 for _, record := range snsEvent.Records {
  processMessage(record)
 }
 fmt.Println("done")
}

func processMessage(record events.SNSEventRecord) {
 message := record.SNS.Message
 fmt.Printf("Processed message: %s\n", message)
 // TODO: Process your record here
}

func main() {
 lambda.Start(handler)
}
```

Invoquer une fonction Lambda à partir d’un déclencheur Amazon SQS

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception de messages provenant d'une file d'attente SQS. La fonction extrait les messages du paramètre d’événement et consigne le contenu de chaque message.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l’exemple complet et découvrez comment le configurer et l’exécuter dans le référentiel d’exemples sans serveur.

Consommation d’un événement SQS avec Lambda à l’aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package integration_sqs_to_lambda

import (
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.SQSEvent) error {
 for _, record := range event.Records {
  err := processMessage(record)
  if err != nil {
   return err
  }
 }
 fmt.Println("done")
 return nil
}

func processMessage(record events.SQSMessage) error {
 fmt.Printf("Processed message %s\n", record.Body)
 // TODO: Do interesting work based on the new message
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Signalement des échecs d’articles par lots pour les fonctions Lambda à l’aide d’un déclencheur Kinesis

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'un flux Kinesis. La fonction signale les défaillances échecs d’articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots Kinesis avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent)
 (map[string]interface{}, error) {
 batchItemFailures := []map[string]interface{}{}

 for _, record := range kinesisEvent.Records {
  curRecordSequenceNumber := ""

  // Process your record
  if /* Your record processing condition here */ {
   curRecordSequenceNumber = record.Kinesis.SequenceNumber
  }

  // Add a condition to check if the record processing failed
  if curRecordSequenceNumber != "" {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": curRecordSequenceNumber})
  }
 }

 kinesisBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
```

```
 return kinesisBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

Signalement des échecs d'articles par lots pour les fonctions Lambda à l'aide d'un déclencheur DynamoDB

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'un flux DynamoDB. La fonction signale les défaillances échecs d'articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots DynamoDB avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

type BatchItemFailure struct {
 ItemIdentifier string `json:"ItemIdentifier"`
}

type BatchResult struct {
```

```
 BatchItemFailures []BatchItemFailure `json:"BatchItemFailures"`
}

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*BatchResult,
 error) {
 var batchItemFailures []BatchItemFailure
 curRecordSequenceNumber := ""

 for _, record := range event.Records {
  // Process your record
  curRecordSequenceNumber = record.Change.SequenceNumber
 }

 if curRecordSequenceNumber != "" {
  batchItemFailures = append(batchItemFailures, BatchItemFailure{ItemIdentifier:
 curRecordSequenceNumber})
 }

 batchResult := BatchResult{
  BatchItemFailures: batchItemFailures,
 }

 return &batchResult, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

Signalement des échecs d’articles par lots pour les fonctions Lambda à l’aide d’un déclencheur Amazon SQS

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'une file d'attente SQS. La fonction signale les défaillances échecs d’articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots SQS avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, sqsEvent events.SQSEvent) (map[string]interface{},
 error) {
 batchItemFailures := []map[string]interface{}{}

 for _, message := range sqsEvent.Records {

  if /* Your message processing condition here */ {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": message.MessageId})
  }
 }

 sqsBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
 return sqsBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

AWS contributions communautaires

Création et test d'une application sans serveur

L'exemple de code suivant montre comment créer et tester une application sans serveur à l'aide d'API Gateway avec Lambda et DynamoDB

Kit SDK for Go V2

Montre comment créer et tester une application sans serveur composée d'une API Gateway avec Lambda et DynamoDB à l'aide du SDK Go.

Pour obtenir le code source complet et les instructions de configuration et d'exécution, consultez l'exemple complet sur GitHub.

Les services utilisés dans cet exemple

- API Gateway
- DynamoDB
- Lambda

Exemples Amazon MSK utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon MSK.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Exemples sans serveur

Exemples sans serveur

Invocation d'une fonction Lambda à partir d'un déclencheur Amazon MSK

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception d'enregistrements d'un cluster Amazon MSK. La fonction récupère les données utiles MSK et journalise le contenu de l'enregistrement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement Amazon MSK avec Lambda en utilisant Go.

```
package main

import (
 "encoding/base64"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.KafkaEvent) {
 for key, records := range event.Records {
  fmt.Println("Key:", key)

  for _, record := range records {
   fmt.Println("Record:", record)

   decodedValue, _ := base64.StdEncoding.DecodeString(record.Value)
   message := string(decodedValue)
   fmt.Println("Message:", message)
  }
 }
}
```

```
func main() {
 lambda.Start(handler)
}
```

Exemples d'utilisation du SDK pour Go V2 par Partner Central

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Partner Central.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Rubriques

- Actions

Actions

`GetOpportunity`

L'exemple de code suivant montre comment utiliser`GetOpportunity`.

Kit SDK for Go V2

Profitez d'une opportunité.

```
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/partnercentralselling"
)

func main() {
 config, err := config.LoadDefaultConfig(context.TODO())

 if err != nil {
  log.Fatal(err)
 }

 config.Region = "us-east-1"

 client := partnercentralselling.NewFromConfig(config)

 output, err := client.GetOpportunity(context.TODO(),
 &partnercentralselling.GetOpportunityInput{
  Identifier: aws.String("O1111111"),
  Catalog:    aws.String("AWS"),
 })

 if err != nil {
  log.Fatal(err)
 }
 log.Println("printing opportuniy...\n")

 jsonOutput, err := json.MarshalIndent(output, "", "    ")

 fmt.Println(string(jsonOutput))
}
```

- Pour plus de détails sur l'API, reportez-vous GetOpportunityà la section Référence des AWS SDK pour Go API.

`ListOpportunities`

L'exemple de code suivant montre comment utiliser`ListOpportunities`.

Kit SDK for Go V2

Énumérez les opportunités.

```
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/partnercentralselling"
)

func main() {
 config, err := config.LoadDefaultConfig(context.TODO())

 if err != nil {
  log.Fatal(err)
 }

 config.Region = "us-east-1"

 client := partnercentralselling.NewFromConfig(config)

 output, err := client.ListOpportunities(context.TODO(),
 &partnercentralselling.ListOpportunitiesInput{
  MaxResults: aws.Int32(2),
  Catalog:    aws.String("AWS"),
 })

 if err != nil {
  log.Fatal(err)
 }

 jsonOutput, err := json.MarshalIndent(output, "", "    ")
 fmt.Println(string(jsonOutput))
}
```

- Pour plus de détails sur l'API, reportez-vous ListOpportunitiesà la section Référence des AWS SDK pour Go API.

Exemples d'Amazon RDS utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon RDS.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Hello Amazon RDS

Les exemples de code suivants montrent comment bien démarrer avec Amazon RDS.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/rds"
)
```

```
// main uses the AWS SDK for Go V2 to create an Amazon Relational Database Service
 (Amazon RDS)
// client and list up to 20 DB instances in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 rdsClient := rds.NewFromConfig(sdkConfig)
 const maxInstances = 20
 fmt.Printf("Let's list up to %v DB instances.\n", maxInstances)
 output, err := rdsClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{MaxRecords: aws.Int32(maxInstances)})
 if err != nil {
  fmt.Printf("Couldn't list DB instances: %v\n", err)
  return
 }
 if len(output.DBInstances) == 0 {
  fmt.Println("No DB instances found.")
 } else {
  for _, instance := range output.DBInstances {
   fmt.Printf("DB instance %v has database %v.\n", *instance.DBInstanceIdentifier,
    *instance.DBName)
  }
 }
}
```

- Pour plus de détails sur l'API, voir Description DBInstances dans le manuel de référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions

- Exemples sans serveur

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- Créez un groupe de paramètres de bases de données personnalisé et définissez des valeurs pour les paramètres.
- Créez une instance de base de données configurée pour utiliser le groupe de paramètres. L'instance de base de données contient également une base de données.
- Prenez un instantané de l'instance.
- Supprimez l'instance et le groupe de paramètres.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "fmt"
 "log"
 "sort"
 "strconv"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
```

```
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/rds/actions"
 "github.com/google/uuid"
)

// GetStartedInstances is an interactive example that shows you how to use the AWS
 SDK for Go
// with Amazon Relation Database Service (Amazon RDS) to do the following:
//
//  1. Create a custom DB parameter group and set parameter values.
//  2. Create a DB instance that is configured to use the parameter group. The DB
 instance
//     also contains a database.
//  3. Take a snapshot of the DB instance.
//  4. Delete the DB instance and parameter group.
type GetStartedInstances struct {
 sdkConfig  aws.Config
 instances  actions.DbInstances
 questioner demotools.IQuestioner
 helper     IScenarioHelper
 isTestRun  bool
}

// NewGetStartedInstances constructs a GetStartedInstances instance from a
 configuration.
// It uses the specified config to get an Amazon RDS
// client and create wrappers for the actions used in the scenario.
func NewGetStartedInstances(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) GetStartedInstances {
 rdsClient := rds.NewFromConfig(sdkConfig)
 return GetStartedInstances{
  sdkConfig:  sdkConfig,
  instances:  actions.DbInstances{RdsClient: rdsClient},
  questioner: questioner,
  helper:     helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedInstances) Run(ctx context.Context, dbEngine string,
 parameterGroupName string,
 instanceName string, dbName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
```

```
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon Relational Database Service (Amazon RDS) DB
 Instance demo.")
 log.Println(strings.Repeat("-", 88))

 parameterGroup := scenario.CreateParameterGroup(ctx, dbEngine, parameterGroupName)
 scenario.SetUserParameters(ctx, parameterGroupName)
 instance := scenario.CreateInstance(ctx, instanceName, dbEngine, dbName,
 parameterGroup)
 scenario.DisplayConnection(instance)
 scenario.CreateSnapshot(ctx, instance)
 scenario.Cleanup(ctx, instance, parameterGroup)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// CreateParameterGroup shows how to get available engine versions for a specified
// database engine and create a DB parameter group that is compatible with a
// selected engine family.
func (scenario GetStartedInstances) CreateParameterGroup(ctx context.Context,
 dbEngine string,
 parameterGroupName string) *types.DBParameterGroup {

 log.Printf("Checking for an existing DB parameter group named %v.\n",
  parameterGroupName)
 parameterGroup, err := scenario.instances.GetParameterGroup(ctx,
 parameterGroupName)
 if err != nil {
  panic(err)
 }
 if parameterGroup == nil {
  log.Printf("Getting available database engine versions for %v.\n", dbEngine)
  engineVersions, err := scenario.instances.GetEngineVersions(ctx, dbEngine, "")
  if err != nil {
   panic(err)
  }

  familySet := map[string]struct{}{}
  for _, family := range engineVersions {
```

```
    familySet[*family.DBParameterGroupFamily] = struct{}{}
   }
   var families []string
   for family := range familySet {
    families = append(families, family)
   }
   sort.Strings(families)
   familyIndex := scenario.questioner.AskChoice("Which family do you want to use?\n",
  families)
   log.Println("Creating a DB parameter group.")
   _, err = scenario.instances.CreateParameterGroup(
    ctx, parameterGroupName, families[familyIndex], "Example parameter group.")
   if err != nil {
    panic(err)
   }
   parameterGroup, err = scenario.instances.GetParameterGroup(ctx,
  parameterGroupName)
   if err != nil {
    panic(err)
   }
  }
  log.Printf("Parameter group %v:\n", *parameterGroup.DBParameterGroupFamily)
  log.Printf("\tName: %v\n", *parameterGroup.DBParameterGroupName)
  log.Printf("\tARN: %v\n", *parameterGroup.DBParameterGroupArn)
  log.Printf("\tFamily: %v\n", *parameterGroup.DBParameterGroupFamily)
  log.Printf("\tDescription: %v\n", *parameterGroup.Description)
  log.Println(strings.Repeat("-", 88))
  return parameterGroup
}

// SetUserParameters shows how to get the parameters contained in a custom parameter
// group and update some of the parameter values in the group.
func (scenario GetStartedInstances) SetUserParameters(ctx context.Context,
  parameterGroupName string) {
  log.Println("Let's set some parameter values in your parameter group.")
  dbParameters, err := scenario.instances.GetParameters(ctx, parameterGroupName, "")
  if err != nil {
   panic(err)
  }
  var updateParams []types.Parameter
  for _, dbParam := range dbParameters {
   if strings.HasPrefix(*dbParam.ParameterName, "auto_increment") &&
    *dbParam.IsModifiable && *dbParam.DataType == "integer" {
    log.Printf("The %v parameter is described as:\n\t%v",
```

```
    *dbParam.ParameterName, *dbParam.Description)
   rangeSplit := strings.Split(*dbParam.AllowedValues, "-")
   lower, _ := strconv.Atoi(rangeSplit[0])
   upper, _ := strconv.Atoi(rangeSplit[1])
   newValue := scenario.questioner.AskInt(
    fmt.Sprintf("Enter a value between %v and %v:", lower, upper),
    demotools.InIntRange{Lower: lower, Upper: upper})
   dbParam.ParameterValue = aws.String(strconv.Itoa(newValue))
   updateParams = append(updateParams, dbParam)
  }
 }
 err = scenario.instances.UpdateParameters(ctx, parameterGroupName, updateParams)
 if err != nil {
  panic(err)
 }
 log.Println("To get a list of parameters that you set previously, specify a source
 of 'user'.")
 userParameters, err := scenario.instances.GetParameters(ctx, parameterGroupName,
 "user")
 if err != nil {
  panic(err)
 }
 log.Println("Here are the parameters you set:")
 for _, param := range userParameters {
  log.Printf("\t%v: %v\n", *param.ParameterName, *param.ParameterValue)
 }
 log.Println(strings.Repeat("-", 88))
}

// CreateInstance shows how to create a DB instance that contains a database of a
// specified type. The database is also configured to use a custom DB parameter
 group.
func (scenario GetStartedInstances) CreateInstance(ctx context.Context, instanceName
 string, dbEngine string,
 dbName string, parameterGroup *types.DBParameterGroup) *types.DBInstance {

 log.Println("Checking for an existing DB instance.")
 instance, err := scenario.instances.GetInstance(ctx, instanceName)
 if err != nil {
  panic(err)
 }
 if instance == nil {
  adminUsername := scenario.questioner.Ask(
   "Enter an administrator username for the database: ", demotools.NotEmpty{})
```

```
 adminPassword := scenario.questioner.AskPassword(
  "Enter a password for the administrator (at least 8 characters): ", 7)
 engineVersions, err := scenario.instances.GetEngineVersions(ctx, dbEngine,
  *parameterGroup.DBParameterGroupFamily)
 if err != nil {
  panic(err)
 }
 var engineChoices []string
 for _, engine := range engineVersions {
  engineChoices = append(engineChoices, *engine.EngineVersion)
 }
 engineIndex := scenario.questioner.AskChoice(
  "The available engines for your parameter group are:\n", engineChoices)
 engineSelection := engineVersions[engineIndex]
 instOpts, err := scenario.instances.GetOrderableInstances(ctx,
*engineSelection.Engine,
  *engineSelection.EngineVersion)
 if err != nil {
  panic(err)
 }
 optSet := map[string]struct{}{}
 for _, opt := range instOpts {
  if strings.Contains(*opt.DBInstanceClass, "micro") {
   optSet[*opt.DBInstanceClass] = struct{}{}
  }
 }
 var optChoices []string
 for opt := range optSet {
  optChoices = append(optChoices, opt)
 }
 sort.Strings(optChoices)
 optIndex := scenario.questioner.AskChoice(
  "The available micro DB instance classes for your database engine are:\n",
optChoices)
 storageType := "standard"
 allocatedStorage := int32(5)
 log.Printf("Creating a DB instance named %v and database %v.\n"+
  "The DB instance is configured to use your custom parameter group %v,\n"+
  "selected engine %v,\n"+
  "selected DB instance class %v,"+
  "and %v GiB of %v storage.\n"+
  "This typically takes several minutes.",
  instanceName, dbName, *parameterGroup.DBParameterGroupName,
*engineSelection.EngineVersion,
```

```
    optChoices[optIndex], allocatedStorage, storageType)
   instance, err = scenario.instances.CreateInstance(
    ctx, instanceName, dbName, *engineSelection.Engine,
  *engineSelection.EngineVersion,
    *parameterGroup.DBParameterGroupName, optChoices[optIndex], storageType,
    allocatedStorage, adminUsername, adminPassword)
   if err != nil {
    panic(err)
   }
   for *instance.DBInstanceStatus != "available" {
    scenario.helper.Pause(30)
    instance, err = scenario.instances.GetInstance(ctx, instanceName)
    if err != nil {
     panic(err)
    }
   }
   log.Println("Instance created and available.")
  }
  log.Println("Instance data:")
  log.Printf("\tDBInstanceIdentifier: %v\n", *instance.DBInstanceIdentifier)
  log.Printf("\tARN: %v\n", *instance.DBInstanceArn)
  log.Printf("\tStatus: %v\n", *instance.DBInstanceStatus)
  log.Printf("\tEngine: %v\n", *instance.Engine)
  log.Printf("\tEngine version: %v\n", *instance.EngineVersion)
  log.Println(strings.Repeat("-", 88))
  return instance
}

// DisplayConnection displays connection information about a DB instance and tips
// on how to connect to it.
func (scenario GetStartedInstances) DisplayConnection(instance *types.DBInstance) {
  log.Println(
   "You can now connect to your database by using your favorite MySQL client.\n" +
    "One way to connect is by using the 'mysql' shell on an Amazon EC2 instance\n" +
    "that is running in the same VPC as your DB instance. Pass the endpoint,\n" +
    "port, and administrator username to 'mysql'. Then, enter your password\n" +
    "when prompted:")
  log.Printf("\n\tmysql -h %v -P %v -u %v -p\n",
   *instance.Endpoint.Address, instance.Endpoint.Port, *instance.MasterUsername)
  log.Println("For more information, see the User Guide for RDS:\n" +
   "\thttps://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/
CHAP_GettingStarted.CreatingConnecting.MySQL.html#CHAP_GettingStarted.Connecting.MySQL")
  log.Println(strings.Repeat("-", 88))
}
```

```
// CreateSnapshot shows how to create a DB instance snapshot and wait until it's
 available.
func (scenario GetStartedInstances) CreateSnapshot(ctx context.Context, instance
 *types.DBInstance) {
 if scenario.questioner.AskBool(
  "Do you want to create a snapshot of your DB instance (y/n)? ", "y") {
  snapshotId := fmt.Sprintf("%v-%v", *instance.DBInstanceIdentifier,
 scenario.helper.UniqueId())
  log.Printf("Creating a snapshot named %v. This typically takes a few minutes.\n",
 snapshotId)
  snapshot, err := scenario.instances.CreateSnapshot(ctx,
 *instance.DBInstanceIdentifier, snapshotId)
  if err != nil {
   panic(err)
  }
  for *snapshot.Status != "available" {
   scenario.helper.Pause(30)
   snapshot, err = scenario.instances.GetSnapshot(ctx, snapshotId)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Snapshot data:")
  log.Printf("\tDBSnapshotIdentifier: %v\n", *snapshot.DBSnapshotIdentifier)
  log.Printf("\tARN: %v\n", *snapshot.DBSnapshotArn)
  log.Printf("\tStatus: %v\n", *snapshot.Status)
  log.Printf("\tEngine: %v\n", *snapshot.Engine)
  log.Printf("\tEngine version: %v\n", *snapshot.EngineVersion)
  log.Printf("\tDBInstanceIdentifier: %v\n", *snapshot.DBInstanceIdentifier)
  log.Printf("\tSnapshotCreateTime: %v\n", *snapshot.SnapshotCreateTime)
  log.Println(strings.Repeat("-", 88))
 }
}

// Cleanup shows how to clean up a DB instance and DB parameter group.
// Before the DB parameter group can be deleted, all associated DB instances must
 first be deleted.
func (scenario GetStartedInstances) Cleanup(
 ctx context.Context, instance *types.DBInstance, parameterGroup
 *types.DBParameterGroup) {

 if scenario.questioner.AskBool(
```

```
  "\nDo you want to delete the database instance and parameter group (y/n)? ", "y")
 {
  log.Printf("Deleting database instance %v.\n", *instance.DBInstanceIdentifier)
  err := scenario.instances.DeleteInstance(ctx, *instance.DBInstanceIdentifier)
  if err != nil {
   panic(err)
  }
  log.Println(
   "Waiting for the DB instance to delete. This typically takes several minutes.")
  for instance != nil {
   scenario.helper.Pause(30)
   instance, err = scenario.instances.GetInstance(ctx,
 *instance.DBInstanceIdentifier)
   if err != nil {
    panic(err)
   }
  }
  log.Printf("Deleting parameter group %v.", *parameterGroup.DBParameterGroupName)
  err = scenario.instances.DeleteParameterGroup(ctx,
 *parameterGroup.DBParameterGroupName)
  if err != nil {
   panic(err)
  }
 }
}

// IScenarioHelper abstracts the function from a scenario so that it
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 UniqueId() string
}
type ScenarioHelper struct{}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}

// UniqueId returns a new UUID.
func (helper ScenarioHelper) UniqueId() string {
 return uuid.New().String()
}
```

Définissez des fonctions appelées par le scénario pour gérer des actions Amazon RDS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}


// GetParameterGroup gets a DB parameter group by name.
func (instances *DbInstances) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBParameterGroup, error) {
 output, err := instances.RdsClient.DescribeDBParameterGroups(
  ctx, &rds.DescribeDBParameterGroupsInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBParameterGroups[0], err
 }
}
```

```
// CreateParameterGroup creates a DB parameter group that is based on the specified
// parameter group family.
func (instances *DbInstances) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBParameterGroup, error) {

 output, err := instances.RdsClient.CreateDBParameterGroup(ctx,
  &rds.CreateDBParameterGroupInput{
   DBParameterGroupName:   aws.String(parameterGroupName),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
   Description:            aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBParameterGroup, err
 }
}



// DeleteParameterGroup deletes the named DB parameter group.
func (instances *DbInstances) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := instances.RdsClient.DeleteDBParameterGroup(ctx,
  &rds.DeleteDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}



// GetParameters gets the parameters that are contained in a DB parameter group.
func (instances *DbInstances) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
```

```
 []types.Parameter, error) {

 var output *rds.DescribeDBParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator := rds.NewDescribeDBParametersPaginator(instances.RdsClient,
  &rds.DescribeDBParametersInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Source:               aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get parameters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}



// UpdateParameters updates parameters in a named DB parameter group.
func (instances *DbInstances) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := instances.RdsClient.ModifyDBParameterGroup(ctx,
  &rds.ModifyDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Parameters:           params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}



// CreateSnapshot creates a snapshot of a DB instance.
```

```
func (instances *DbInstances) CreateSnapshot(ctx context.Context, instanceName
 string, snapshotName string) (
 *types.DBSnapshot, error) {
 output, err := instances.RdsClient.CreateDBSnapshot(ctx,
 &rds.CreateDBSnapshotInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBSnapshot, nil
 }
}



// GetSnapshot gets a DB instance snapshot.
func (instances *DbInstances) GetSnapshot(ctx context.Context, snapshotName string)
 (*types.DBSnapshot, error) {
 output, err := instances.RdsClient.DescribeDBSnapshots(ctx,
  &rds.DescribeDBSnapshotsInput{
   DBSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBSnapshots[0], nil
 }
}



// CreateInstance creates a DB instance.
func (instances *DbInstances) CreateInstance(ctx context.Context, instanceName
 string, dbName string,
 dbEngine string, dbEngineVersion string, parameterGroupName string, dbInstanceClass
 string,
 storageType string, allocatedStorage int32, adminName string, adminPassword string)
 (
 *types.DBInstance, error) {
```

```
 output, err := instances.RdsClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBName:               aws.String(dbName),
  DBParameterGroupName: aws.String(parameterGroupName),
  Engine:               aws.String(dbEngine),
  EngineVersion:        aws.String(dbEngineVersion),
  DBInstanceClass:      aws.String(dbInstanceClass),
  StorageType:          aws.String(storageType),
  AllocatedStorage:     aws.Int32(allocatedStorage),
  MasterUsername:       aws.String(adminName),
  MasterUserPassword:   aws.String(adminPassword),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}



// GetInstance gets data about a DB instance.
func (instances *DbInstances) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}
```

```
// DeleteInstance deletes a DB instance.
func (instances *DbInstances) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := instances.RdsClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (instances *DbInstances) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := instances.RdsClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
```

```
// compatible with a set of specifications.
func (instances *DbInstances) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instanceOptions []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(instances.RdsClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instance options: %v\n", err)
   break
  } else {
   instanceOptions = append(instanceOptions, output.OrderableDBInstanceOptions...)
  }
 }
 return instanceOptions, err
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CréerDBInstance
  - Créer un DBParameter groupe
  - CréerDBSnapshot
  - SuppressionDBInstance
  - Supprimer le DBParameter groupe
  - Décrire DBEngine les versions
  - Décrivez DBInstances
  - Décrire DBParameter les groupes
  - Décrivez DBParameters

- Décrivez DBSnapshots
- DescribeOrderableDBInstanceOptions
- Modifier le DBParameter groupe

Actions

`CreateDBInstance`

L'exemple de code suivant montre comment utiliser`CreateDBInstance`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// CreateInstance creates a DB instance.
func (instances *DbInstances) CreateInstance(ctx context.Context, instanceName
 string, dbName string,
 dbEngine string, dbEngineVersion string, parameterGroupName string, dbInstanceClass
 string,
```

```
 storageType string, allocatedStorage int32, adminName string, adminPassword string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBName:               aws.String(dbName),
  DBParameterGroupName: aws.String(parameterGroupName),
  Engine:               aws.String(dbEngine),
  EngineVersion:        aws.String(dbEngineVersion),
  DBInstanceClass:      aws.String(dbInstanceClass),
  StorageType:          aws.String(storageType),
  AllocatedStorage:     aws.Int32(allocatedStorage),
  MasterUsername:       aws.String(adminName),
  MasterUserPassword:   aws.String(adminPassword),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

- Pour plus de détails sur l'API, consultez Create DBInstance in AWS SDK pour Go API Reference.

`CreateDBParameterGroup`

L'exemple de code suivant montre comment utiliser`CreateDBParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// CreateParameterGroup creates a DB parameter group that is based on the specified
// parameter group family.
func (instances *DbInstances) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBParameterGroup, error) {

 output, err := instances.RdsClient.CreateDBParameterGroup(ctx,
  &rds.CreateDBParameterGroupInput{
   DBParameterGroupName:   aws.String(parameterGroupName),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
   Description:            aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBParameterGroup, err
 }
}
```

- Pour plus de détails sur l'API, consultez la section Créer un DBParameter groupe dans le manuel de référence des AWS SDK pour Go API.

`CreateDBSnapshot`

L'exemple de code suivant montre comment utiliser`CreateDBSnapshot`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// CreateSnapshot creates a snapshot of a DB instance.
func (instances *DbInstances) CreateSnapshot(ctx context.Context, instanceName
 string, snapshotName string) (
 *types.DBSnapshot, error) {
 output, err := instances.RdsClient.CreateDBSnapshot(ctx,
 &rds.CreateDBSnapshotInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBSnapshot, nil
```

```
 }
}
```

- Pour plus de détails sur l'API, consultez Create DBSnapshot in AWS SDK pour Go API Reference.

`DeleteDBInstance`

L'exemple de code suivant montre comment utiliser`DeleteDBInstance`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// DeleteInstance deletes a DB instance.
func (instances *DbInstances) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := instances.RdsClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
```

```
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Supprimer DBInstance dans le manuel de référence des AWS SDK pour Go API.

`DeleteDBParameterGroup`

L'exemple de code suivant montre comment utiliser`DeleteDBParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
```

```
 RdsClient *rds.Client
}



// DeleteParameterGroup deletes the named DB parameter group.
func (instances *DbInstances) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := instances.RdsClient.DeleteDBParameterGroup(ctx,
  &rds.DeleteDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Supprimer le DBParameter groupe dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBEngineVersions`

L'exemple de code suivant montre comment utiliser`DescribeDBEngineVersions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (instances *DbInstances) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := instances.RdsClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}
```

- Pour plus de détails sur l'API, consultez la section Description DBEngine des versions dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBInstances`

L'exemple de code suivant montre comment utiliser`DescribeDBInstances`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetInstance gets data about a DB instance.
func (instances *DbInstances) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
```

```
 } else {
  return &output.DBInstances[0], nil
 }
}
```

- Pour plus de détails sur l'API, voir Description DBInstances dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBParameterGroups`

L'exemple de code suivant montre comment utiliser`DescribeDBParameterGroups`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetParameterGroup gets a DB parameter group by name.
```

```
func (instances *DbInstances) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBParameterGroup, error) {
 output, err := instances.RdsClient.DescribeDBParameterGroups(
  ctx, &rds.DescribeDBParameterGroupsInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBParameterGroups[0], err
 }
}
```

- Pour plus de détails sur l'API, consultez la section Décrire DBParameter les groupes dans le AWS SDK pour Go manuel de référence des API.

`DescribeDBParameters`

L'exemple de code suivant montre comment utiliser`DescribeDBParameters`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
```

```
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetParameters gets the parameters that are contained in a DB parameter group.
func (instances *DbInstances) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator := rds.NewDescribeDBParametersPaginator(instances.RdsClient,
  &rds.DescribeDBParametersInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Source:               aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get parameters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}
```

- Pour plus de détails sur l'API, voir Description DBParameters dans le manuel de référence des AWS SDK pour Go API.

`DescribeDBSnapshots`

L'exemple de code suivant montre comment utiliser`DescribeDBSnapshots`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetSnapshot gets a DB instance snapshot.
func (instances *DbInstances) GetSnapshot(ctx context.Context, snapshotName string)
 (*types.DBSnapshot, error) {
 output, err := instances.RdsClient.DescribeDBSnapshots(ctx,
  &rds.DescribeDBSnapshotsInput{
   DBSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBSnapshots[0], nil
 }
}
```

- Pour plus de détails sur l'API, voir Description DBSnapshots dans le manuel de référence des AWS SDK pour Go API.

`DescribeOrderableDBInstanceOptions`

L'exemple de code suivant montre comment utiliser`DescribeOrderableDBInstanceOptions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (instances *DbInstances) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {
```

```
 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instanceOptions []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(instances.RdsClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instance options: %v\n", err)
   break
  } else {
   instanceOptions = append(instanceOptions, output.OrderableDBInstanceOptions...)
  }
 }
 return instanceOptions, err
}
```

- Pour plus de détails sur l'API, consultez la section DescribeOrderableDBInstanceOptions du manuel de référence des AWS SDK pour Go API.

`ModifyDBParameterGroup`

L'exemple de code suivant montre comment utiliser`ModifyDBParameterGroup`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
```

```
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// UpdateParameters updates parameters in a named DB parameter group.
func (instances *DbInstances) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := instances.RdsClient.ModifyDBParameterGroup(ctx,
  &rds.ModifyDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Parameters:           params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- Pour plus de détails sur l'API, voir Modifier DBParameter le groupe dans la référence des AWS SDK pour Go API.

Exemples sans serveur

Connexion à une base de données Amazon RDS dans une fonction Lambda

L'exemple de code suivant montre comment implémenter une fonction Lambda qui se connecte à une base de données RDS. La fonction effectue une simple requête de base de données et renvoie le résultat.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Connexion à une base de données Amazon RDS dans une fonction Lambda à l'aide de Go.

```
/*
Golang v2 code here.
*/

package main

import (
 "context"
 "database/sql"
 "encoding/json"
 "fmt"
 "os"

 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
 _ "github.com/go-sql-driver/mysql"
)

type MyEvent struct {
 Name string `json:"name"`
}

func HandleRequest(event *MyEvent) (map[string]interface{}, error) {
```

```
var dbName string = os.Getenv("DatabaseName")
var dbUser string = os.Getenv("DatabaseUser")
var dbHost string = os.Getenv("DBHost") // Add hostname without https
var dbPort int = os.Getenv("Port")      // Add port number
var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
var region string = os.Getenv("AWS_REGION")

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
 panic("configuration error: " + err.Error())
}

authenticationToken, err := auth.BuildAuthToken(
 context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
if err != nil {
 panic("failed to create authentication token: " + err.Error())
}

dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
 dbUser, authenticationToken, dbEndpoint, dbName,
)

db, err := sql.Open("mysql", dsn)
if err != nil {
 panic(err)
}

defer db.Close()

var sum int
err = db.QueryRow("SELECT ?+? AS sum", 3, 2).Scan(&sum)
if err != nil {
 panic(err)
}
s := fmt.Sprint(sum)
message := fmt.Sprintf("The selected sum is: %s", s)

messageBytes, err := json.Marshal(message)
if err != nil {
 return nil, err
}

messageString := string(messageBytes)
```

```
 return map[string]interface{}{
  "statusCode": 200,
  "headers":    map[string]string{"Content-Type": "application/json"},
  "body":       messageString,
 }, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

Exemples d'Amazon Redshift utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon Redshift.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Amazon Redshift

Les exemples de code suivants montrent comment commencer à utiliser Amazon Redshift.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
)

// main uses the AWS SDK for Go V2 to create a Redshift client
// and list up to 10 clusters in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 redshiftClient := redshift.NewFromConfig(sdkConfig)
 count := 20
 fmt.Printf("Let's list up to %v clusters for your account.\n", count)
 result, err := redshiftClient.DescribeClusters(ctx,
 &redshift.DescribeClustersInput{
  MaxRecords: aws.Int32(int32(count)),
 })
 if err != nil {
  fmt.Printf("Couldn't list clusters for your account. Here's why: %v\n", err)
  return
 }
 if len(result.Clusters) == 0 {
  fmt.Println("You don't have any clusters!")
  return
 }
 for _, cluster := range result.Clusters {
  fmt.Printf("\t%v : %v\n", *cluster.ClusterIdentifier, *cluster.ClusterStatus)
 }
```

```
}
```

- Pour plus de détails sur l'API, reportez-vous DescribeClustersà la section Référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- Créez un cluster Redshift.
- Répertoriez les bases de données du cluster.
- Créez un tableau intitulé Movies.
- Renseignez le tableau Films.
- Recherchez le tableau des films par année.
- Modifiez le cluster Redshift.
- Supprimez le cluster Amazon Redshift.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package scenarios
```

```
import (
 "context"
 "encoding/json"
 "errors"
 "fmt"
 "log"
 "math/rand"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 redshift_types "github.com/aws/aws-sdk-go-v2/service/redshift/types"
 redshiftdata_types "github.com/aws/aws-sdk-go-v2/service/redshiftdata/types"
 "github.com/aws/aws-sdk-go-v2/service/secretsmanager"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/redshift/actions"

 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshiftdata"
)

// IScenarioHelper abstracts input and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 GetName() string
}

const rMax = 100000

type ScenarioHelper struct {
 Prefix string
 Random *rand.Rand
}

// GetName returns a unique name formed of a prefix and a random number.
func (helper ScenarioHelper) GetName() string {
 return fmt.Sprintf("%v%v", helper.Prefix, helper.Random.Intn(rMax))
}

// RedshiftBasicsScenario separates the steps of this scenario into individual
 functions so that
// they are simpler to read and understand.
type RedshiftBasicsScenario struct {
 sdkConfig         aws.Config
```

```
 helper            IScenarioHelper
 questioner        demotools.IQuestioner
 pauser            demotools.IPausable
 filesystem        demotools.IFileSystem
 redshiftActor     *actions.RedshiftActions
 redshiftDataActor *actions.RedshiftDataActions
 secretsmanager    *SecretsManager
}

// SecretsManager is used to retrieve username and password information from a
 secure service.
type SecretsManager struct {
 SecretsManagerClient *secretsmanager.Client
}

// RedshiftBasics constructs a new Redshift Basics runner.
func RedshiftBasics(sdkConfig aws.Config, questioner demotools.IQuestioner, pauser
 demotools.IPausable, filesystem demotools.IFileSystem, helper IScenarioHelper)
 RedshiftBasicsScenario {
 scenario := RedshiftBasicsScenario{
  sdkConfig:         sdkConfig,
  helper:            helper,
  questioner:        questioner,
  pauser:            pauser,
  filesystem:        filesystem,
  secretsmanager:    &SecretsManager{SecretsManagerClient:
 secretsmanager.NewFromConfig(sdkConfig)},
  redshiftActor:     &actions.RedshiftActions{RedshiftClient:
 redshift.NewFromConfig(sdkConfig)},
  redshiftDataActor: &actions.RedshiftDataActions{RedshiftDataClient:
 redshiftdata.NewFromConfig(sdkConfig)},
 }
 return scenario
}


// Movie makes it easier to use Movie objects given in json format.
type Movie struct {
 ID    int    `json:"id"`
 Title string `json:"title"`
 Year  int    `json:"year"`
}
```

```
// User makes it easier to get the User data back from SecretsManager and use it
 later.
type User struct {
 Username string `json:"userName"`
 Password string `json:"userPassword"`
}

// Run runs the RedshiftBasics interactive example that shows you how to use Amazon
// Redshift and how to interact with its common endpoints.
//
// 0. Retrieve username and password information to access Redshift.
// 1. Create a cluster.
// 2. Wait for the cluster to become available.
// 3. List the available databases in the region.
// 4. Create a table named "Movies" in the "dev" database.
// 5. Populate the movies table from the "movies.json" file.
// 6. Query the movies table by year.
// 7. Modify the cluster's maintenance window.
// 8. Optionally clean up all resources created during this demo.
//
// This example creates an Amazon Redshift service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func (runner *RedshiftBasicsScenario) Run(ctx context.Context) {

 user := User{}
 secretId := "s3express/basics/secrets"
 clusterId := "demo-cluster-1"
 maintenanceWindow := "wed:07:30-wed:08:00"
 databaseName := "dev"
 tableName := "Movies"
 fileName := "Movies.json"
 nodeType := "ra3.xlplus"
 clusterType := "single-node"

 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := runner.questioner.(*demotools.MockQuestioner)
```

```
  if isMock || runner.questioner.AskBool("Do you want to see the full error message
(y/n)?", "y") {
   log.Println(r)
  }
  runner.cleanUpResources(ctx, clusterId, databaseName, tableName, user.Username,
runner.questioner)
 }
}()

// Retrieve the userName and userPassword from SecretsManager
output, err := runner.secretsmanager.SecretsManagerClient.GetSecretValue(ctx,
&secretsmanager.GetSecretValueInput{
 SecretId: aws.String(secretId),
})
if err != nil {
 log.Printf("There was a problem getting the secret value: %s", err)
 log.Printf("Please make sure to create a secret named 's3express/basics/secrets'
with keys of 'userName' and 'userPassword'.")
 panic(err)
}

err = json.Unmarshal([]byte(*output.SecretString), &user)
if err != nil {
 log.Printf("There was a problem parsing the secret value from JSON: %s", err)
 panic(err)
}

// Create the Redshift cluster
_, err = runner.redshiftActor.CreateCluster(ctx, clusterId, user.Username,
user.Password, nodeType, clusterType, true)
if err != nil {
 var clusterAlreadyExistsFault *redshift_types.ClusterAlreadyExistsFault
 if errors.As(err, &clusterAlreadyExistsFault) {
  log.Println("Cluster already exists. Continuing.")
 } else {
  log.Println("Error creating cluster.")
  panic(err)
 }
}

// Wait for the cluster to become available
waiter := redshift.NewClusterAvailableWaiter(runner.redshiftActor.RedshiftClient)
err = waiter.Wait(ctx, &redshift.DescribeClustersInput{
 ClusterIdentifier: aws.String(clusterId),
```

```
}, 5*time.Minute)
if err != nil {
 log.Println("An error occurred waiting for the cluster.")
 panic(err)
}

// Get some info about the cluster
describeOutput, err := runner.redshiftActor.DescribeClusters(ctx, clusterId)
if err != nil {
 log.Println("Something went wrong trying to get information about the cluster.")
 panic(err)
}
log.Println("Here's some information about the cluster.")
log.Printf("The cluster's status is %s", *describeOutput.Clusters[0].ClusterStatus)
log.Printf("The cluster was created at %s",
*describeOutput.Clusters[0].ClusterCreateTime)

// List databases
log.Println("List databases in", clusterId)
runner.questioner.Ask("Press Enter to continue...")
err = runner.redshiftDataActor.ListDatabases(ctx, clusterId, databaseName,
user.Username)
if err != nil {
 log.Printf("Failed to list databases: %v\n", err)
 panic(err)
}

// Create the "Movies" table
log.Println("Now you will create a table named " + tableName + ".")
runner.questioner.Ask("Press Enter to continue...")
err = nil
result, err := runner.redshiftDataActor.CreateTable(ctx, clusterId, databaseName,
tableName, user.Username, runner.pauser, []string{"title VARCHAR(256)", "year
INT"})
if err != nil {
 log.Printf("Failed to create table: %v\n", err)
 panic(err)
}

describeInput := redshiftdata.DescribeStatementInput{
 Id: result.Id,
}
query := actions.RedshiftQuery{
 Context: ctx,
```

```
  Input:   describeInput,
  Result:  result,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute query: %v\n", err)
  panic(err)
 }
 log.Printf("Successfully executed query\n")

 // Populate the "Movies" table
 runner.PopulateMoviesTable(ctx, clusterId, databaseName, tableName, user.Username,
 fileName)

 // Query the "Movies" table by year
 log.Println("Query the Movies table by year.")
 year := runner.questioner.AskInt(
  fmt.Sprintf("Enter a value between %v and %v:", 2012, 2014),
  demotools.InIntRange{Lower: 2012, Upper: 2014})
 runner.QueryMoviesByYear(ctx, clusterId, databaseName, tableName, user.Username,
 year)

 // Modify the cluster's maintenance window
 runner.redshiftActor.ModifyCluster(ctx, clusterId, maintenanceWindow)

 // Delete the Redshift cluster if confirmed
 runner.cleanUpResources(ctx, clusterId, databaseName, tableName, user.Username,
 runner.questioner)

 log.Println("Thanks for watching!")
}

// cleanUpResources asks the user if they would like to delete each resource created
 during the scenario, from most
// impactful to least impactful. If any choice to delete is made, further deletion
 attempts are skipped.
func (runner *RedshiftBasicsScenario) cleanUpResources(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string,
 questioner demotools.IQuestioner) {
 deleted := false
 var err error = nil
 if questioner.AskBool("Do you want to delete the entire cluster? This will clean up
 all resources. (y/n)", "y") {
  deleted, err = runner.redshiftActor.DeleteCluster(ctx, clusterId)
```

```
  if err != nil {
   log.Printf("Error deleting cluster: %v", err)
  }
 }
 if !deleted && questioner.AskBool("Do you want to delete the dev table? This will
 clean up all inserted records but keep your cluster intact. (y/n)", "y") {
  deleted, err = runner.redshiftDataActor.DeleteTable(ctx, clusterId, databaseName,
 tableName, userName)
  if err != nil {
   log.Printf("Error deleting movies table: %v", err)
  }
 }
 if !deleted && questioner.AskBool("Do you want to delete all rows in the Movies
 table? This will clean up all inserted records but keep your cluster and table
 intact. (y/n)", "y") {
  deleted, err = runner.redshiftDataActor.DeleteDataRows(ctx, clusterId,
 databaseName, tableName, userName, runner.pauser)
  if err != nil {
   log.Printf("Error deleting data rows: %v", err)
  }
 }
 if !deleted {
  log.Print("Please manually delete any unwanted resources.")
 }
}


// loadMoviesFromJSON takes the <fileName> file and populates a slice of Movie
 objects.
func (runner *RedshiftBasicsScenario) loadMoviesFromJSON(fileName string, filesystem
 demotools.IFileSystem) ([]Movie, error) {
 file, err := filesystem.OpenFile("../../resources/sample_files/" + fileName)
 if err != nil {
  return nil, err
 }
 defer filesystem.CloseFile(file)

 var movies []Movie
 err = json.NewDecoder(file).Decode(&movies)
 if err != nil {
  return nil, err
 }

 return movies, nil
```

```
}



// PopulateMoviesTable reads data from the <fileName> file and inserts records into
 the "Movies" table.
func (runner *RedshiftBasicsScenario) PopulateMoviesTable(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string, fileName
 string) {
 log.Println("Populate the " + tableName + " table using the " + fileName + "
 file.")
 numRecords := runner.questioner.AskInt(
  fmt.Sprintf("Enter a value between %v and %v:", 10, 100),
  demotools.InIntRange{Lower: 10, Upper: 100})

 movies, err := runner.loadMoviesFromJSON(fileName, runner.filesystem)
 if err != nil {
  log.Printf("Failed to load movies from JSON: %v\n", err)
  panic(err)
 }

 var sqlStatements []string

 for i, movie := range movies {
  if i >= numRecords {
   break
  }

  sqlStatement := fmt.Sprintf(`INSERT INTO %s (title, year) VALUES ('%s', %d);`,
   tableName,
   strings.Replace(movie.Title, "'", "''", -1), // Double any single quotes to
 escape them
   movie.Year)

  sqlStatements = append(sqlStatements, sqlStatement)
 }

 input := &redshiftdata.BatchExecuteStatementInput{
  ClusterIdentifier: aws.String(clusterId),
  Database:          aws.String(databaseName),
  DbUser:            aws.String(userName),
  Sqls:              sqlStatements,
 }
```

```
 result, err := runner.redshiftDataActor.ExecuteBatchStatement(ctx, *input)
 if err != nil {
  log.Printf("Failed to execute batch statement: %v\n", err)
  panic(err)
 }

 describeInput := redshiftdata.DescribeStatementInput{
  Id: result.Id,
 }

 query := actions.RedshiftQuery{
  Context: ctx,
  Result:  result,
  Input:   describeInput,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute batch insert query: %v\n", err)
  return
 }
 log.Printf("Successfully executed batch statement\n")

 log.Printf("%d records were added to the Movies table.\n", numRecords)
}



// QueryMoviesByYear retrieves only movies from the "Movies" table which match the
 given year.
func (runner *RedshiftBasicsScenario) QueryMoviesByYear(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string, year int)
 {

 sqlStatement := fmt.Sprintf(`SELECT title FROM %s WHERE year = %d;`, tableName,
 year)

 input := &redshiftdata.ExecuteStatementInput{
  ClusterIdentifier: aws.String(clusterId),
  Database:          aws.String(databaseName),
  DbUser:            aws.String(userName),
  Sql:               aws.String(sqlStatement),
 }

 result, err := runner.redshiftDataActor.ExecuteStatement(ctx, *input)
```

```
 if err != nil {
  log.Printf("Failed to query movies: %v\n", err)
  panic(err)
 }

 log.Println("The identifier of the statement is ", *result.Id)

 describeInput := redshiftdata.DescribeStatementInput{
  Id: result.Id,
 }

 query := actions.RedshiftQuery{
  Context: ctx,
  Input:   describeInput,
  Result:  result,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute query: %v\n", err)
  panic(err)
 }
 log.Printf("Successfully executed query\n")

 getResultOutput, err := runner.redshiftDataActor.GetStatementResult(ctx,
 *result.Id)
 if err != nil {
  log.Printf("Failed to query movies: %v\n", err)
  panic(err)
 }
 for _, row := range getResultOutput.Records {
  for _, col := range row {
   title, ok := col.(*redshiftdata_types.FieldMemberStringValue)
   if !ok {
    log.Println("Failed to parse the field")
   } else {
    log.Printf("The Movie title field is %s\n", title.Value)
   }
  }
 }
}
```

- Pour plus d'informations sur l'API, consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CreateCluster
  - DescribeClusters
  - DescribeStatement
  - ExecuteStatement
  - GetStatementResult
  - ListDatabasesPaginator
  - ModifyCluster

Actions

`CreateCluster`

L'exemple de code suivant montre comment utiliser`CreateCluster`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)
```

```
// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// CreateCluster sends a request to create a cluster with the given clusterId using
 the provided credentials.
func (actor RedshiftActions) CreateCluster(ctx context.Context, clusterId string,
 userName string, userPassword string, nodeType string, clusterType string,
 publiclyAccessible bool) (*redshift.CreateClusterOutput, error) {
 // Create a new Redshift cluster
 input := &redshift.CreateClusterInput{
  ClusterIdentifier:  aws.String(clusterId),
  MasterUserPassword: aws.String(userPassword),
  MasterUsername:     aws.String(userName),
  NodeType:           aws.String(nodeType),
  ClusterType:        aws.String(clusterType),
  PubliclyAccessible: aws.Bool(publiclyAccessible),
 }
 var opErr *types.ClusterAlreadyExistsFault
 output, err := actor.RedshiftClient.CreateCluster(ctx, input)
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster already exists")
  return nil, nil
 } else if err != nil {
  log.Printf("Failed to create Redshift cluster: %v\n", err)
  return nil, err
 }

 log.Printf("Created cluster %s\n", *output.Cluster.ClusterIdentifier)
 return output, nil
}
```

- Pour plus de détails sur l'API, reportez-vous CreateClusterà la section Référence des AWS SDK pour Go API.

`DeleteCluster`

L'exemple de code suivant montre comment utiliser`DeleteCluster`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// DeleteCluster deletes the given cluster.
func (actor RedshiftActions) DeleteCluster(ctx context.Context, clusterId string)
 (bool, error) {
 input := redshift.DeleteClusterInput{
  ClusterIdentifier:        aws.String(clusterId),
  SkipFinalClusterSnapshot: aws.Bool(true),
 }
 _, err := actor.RedshiftClient.DeleteCluster(ctx, &input)
 var opErr *types.ClusterNotFoundFault
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster was not found. Where could it be?")
  return false, err
 } else if err != nil {
```

```
 log.Printf("Failed to delete Redshift cluster: %v\n", err)
 return false, err
}
waiter := redshift.NewClusterDeletedWaiter(actor.RedshiftClient)
err = waiter.Wait(ctx, &redshift.DescribeClustersInput{
 ClusterIdentifier: aws.String(clusterId),
}, 5*time.Minute)
if err != nil {
 log.Printf("Wait time exceeded for deleting cluster, continuing: %v\n", err)
}
log.Printf("The cluster %s was deleted\n", clusterId)
return true, nil
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteClusterà la section Référence des AWS SDK pour Go API.

`DescribeClusters`

L'exemple de code suivant montre comment utiliser`DescribeClusters`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
```

```
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// DescribeClusters returns information about the given cluster.
func (actor RedshiftActions) DescribeClusters(ctx context.Context, clusterId string)
 (*redshift.DescribeClustersOutput, error) {
 input, err := actor.RedshiftClient.DescribeClusters(ctx,
 &redshift.DescribeClustersInput{
  ClusterIdentifier: aws.String(clusterId),
 })
 var opErr *types.AccessToClusterDeniedFault
 if errors.As(err, &opErr) {
  println("Access to cluster denied.")
  panic(err)
 } else if err != nil {
  println("Failed to describe Redshift clusters.")
  return nil, err
 }
 return input, nil
}
```

- Pour plus de détails sur l'API, reportez-vous DescribeClustersà la section Référence des AWS SDK pour Go API.

`ModifyCluster`

L'exemple de code suivant montre comment utiliser`ModifyCluster`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// ModifyCluster sets the preferred maintenance window for the given cluster.
func (actor RedshiftActions) ModifyCluster(ctx context.Context, clusterId string,
 maintenanceWindow string) *redshift.ModifyClusterOutput {
 // Modify the cluster's maintenance window
 input := &redshift.ModifyClusterInput{
  ClusterIdentifier:          aws.String(clusterId),
  PreferredMaintenanceWindow: aws.String(maintenanceWindow),
 }

 var opErr *types.InvalidClusterStateFault
 output, err := actor.RedshiftClient.ModifyCluster(ctx, input)
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster is in an invalid state.")
```

```
  panic(err)
 } else if err != nil {
  log.Printf("Failed to modify Redshift cluster: %v\n", err)
  panic(err)
 }

 log.Printf("The cluster was successfully modified and now has %s as the maintenance
 window\n", *output.Cluster.PreferredMaintenanceWindow)
 return output
}
```

- Pour plus de détails sur l'API, reportez-vous ModifyClusterà la section Référence des AWS SDK pour Go API.

Exemples d'Amazon S3 utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon S3.

Les principes de base sont des exemples de code qui vous montrent comment effectuer les opérations essentielles au sein d'un service.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Hello Amazon S3

Les exemples de code suivants montrent comment démarrer avec Amazon S3.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "errors"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/smithy-go"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Storage Service
// (Amazon S3) client and list up to 10 buckets in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 s3Client := s3.NewFromConfig(sdkConfig)
 count := 10
 fmt.Printf("Let's list up to %v buckets for your account.\n", count)
 result, err := s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
 if err != nil {
  var ae smithy.APIError
  if errors.As(err, &ae) && ae.ErrorCode() == "AccessDenied" {
   fmt.Println("You don't have permission to list buckets for this account.")
```

```
  } else {
   fmt.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
  }
  return
 }
 if len(result.Buckets) == 0 {
  fmt.Println("You don't have any buckets!")
 } else {
  if count > len(result.Buckets) {
   count = len(result.Buckets)
  }
  for _, bucket := range result.Buckets[:count] {
   fmt.Printf("\t%v\n", *bucket.Name)
  }
 }
}
```

- Pour plus de détails sur l'API, reportez-vous ListBucketsà la section Référence des AWS SDK pour Go API.

Rubriques

- Principes de base
- Actions
- Scénarios
- Exemples sans serveur

Principes de base

Principes de base

L'exemple de code suivant illustre comment :

- créer un compartiment et y charger un fichier ;
- télécharger un objet à partir d'un compartiment ;
- copier un objet dans le sous-dossier d'un compartiment ;
- répertorier les objets d'un compartiment ;

- supprimer le compartiment et tous les objets qui y figurent.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Définissez une structure qui enveloppe les actions de compartiment et d'objet utilisées par le scénario.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// ListBuckets lists the buckets in the current account.
```

```
func (basics BucketBasics) ListBuckets(ctx context.Context) ([]types.Bucket, error)
 {
 var err error
 var output *s3.ListBucketsOutput
 var buckets []types.Bucket
 bucketPaginator := s3.NewListBucketsPaginator(basics.S3Client,
 &s3.ListBucketsInput{})
 for bucketPaginator.HasMorePages() {
  output, err = bucketPaginator.NextPage(ctx)
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "AccessDenied" {
    fmt.Println("You don't have permission to list buckets for this account.")
    err = apiErr
   } else {
    log.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
   }
   break
  } else {
   buckets = append(buckets, output.Buckets...)
  }
 }
 return buckets, err
}



// BucketExists checks whether a bucket exists in the current account.
func (basics BucketBasics) BucketExists(ctx context.Context, bucketName string)
 (bool, error) {
 _, err := basics.S3Client.HeadBucket(ctx, &s3.HeadBucketInput{
  Bucket: aws.String(bucketName),
 })
 exists := true
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NotFound:
    log.Printf("Bucket %v is available.\n", bucketName)
    exists = false
    err = nil
   default:
```

```
    log.Printf("Either you don't have access to bucket %v or another error occurred.
 "+
     "Here's what happened: %v\n", bucketName, err)
   }
  }
 } else {
  log.Printf("Bucket %v exists and you already own it.", bucketName)
 }

 return exists, err
}



// CreateBucket creates a bucket with the specified name in the specified Region.
func (basics BucketBasics) CreateBucket(ctx context.Context, name string, region
 string) error {
 _, err := basics.S3Client.CreateBucket(ctx, &s3.CreateBucketInput{
  Bucket: aws.String(name),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 })
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", name)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", name)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", name)
  }
 }
 return err
}
```

```
// UploadFile reads from a file and puts the data into an object in a bucket.
func (basics BucketBasics) UploadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 file, err := os.Open(fileName)
 if err != nil {
  log.Printf("Couldn't open file %v to upload. Here's why: %v\n", fileName, err)
 } else {
  defer file.Close()
  _, err = basics.S3Client.PutObject(ctx, &s3.PutObjectInput{
   Bucket: aws.String(bucketName),
   Key:    aws.String(objectKey),
   Body:   file,
  })
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
    log.Printf("Error while uploading object to %s. The object is too large.\n"+
     "To upload objects larger than 5GB, use the S3 console (160GB max)\n"+
     "or the multipart upload API (5TB max).", bucketName)
   } else {
    log.Printf("Couldn't upload file %v to %v:%v. Here's why: %v\n",
     fileName, bucketName, objectKey, err)
   }
  } else {
   err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
   }
  }
 }
 return err
}



// UploadLargeObject uses an upload manager to upload data to an object in a bucket.
// The upload manager breaks large data into parts and uploads the parts
 concurrently.
func (basics BucketBasics) UploadLargeObject(ctx context.Context, bucketName string,
 objectKey string, largeObject []byte) error {
 largeBuffer := bytes.NewReader(largeObject)
```

```
 var partMiBs int64 = 10
 uploader := manager.NewUploader(basics.S3Client, func(u *manager.Uploader) {
  u.PartSize = partMiBs * 1024 * 1024
 })
 _, err := uploader.Upload(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
  Body:   largeBuffer,
 })
 if err != nil {
  var apiErr smithy.APIError
  if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
   log.Printf("Error while uploading object to %s. The object is too large.\n"+
    "The maximum size for a multipart upload is 5TB.", bucketName)
  } else {
   log.Printf("Couldn't upload large object to %v:%v. Here's why: %v\n",
    bucketName, objectKey, err)
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }

 return err
}



// DownloadFile gets an object from a bucket and stores it in a local file.
func (basics BucketBasics) DownloadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 result, err := basics.S3Client.GetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Can't get object %s from bucket %s. No such key exists.\n",
 objectKey, bucketName)
```

```
    err = noKey
   } else {
    log.Printf("Couldn't get object %v:%v. Here's why: %v\n", bucketName, objectKey,
  err)
   }
   return err
  }
  defer result.Body.Close()
  file, err := os.Create(fileName)
  if err != nil {
   log.Printf("Couldn't create file %v. Here's why: %v\n", fileName, err)
   return err
  }
  defer file.Close()
  body, err := io.ReadAll(result.Body)
  if err != nil {
   log.Printf("Couldn't read object body from %v. Here's why: %v\n", objectKey, err)
  }
  _, err = file.Write(body)
  return err
}



// DownloadLargeObject uses a download manager to download an object from a bucket.
// The download manager gets the data in parts and writes them to a buffer until all
 of
// the data has been downloaded.
func (basics BucketBasics) DownloadLargeObject(ctx context.Context, bucketName
 string, objectKey string) ([]byte, error) {
 var partMiBs int64 = 10
 downloader := manager.NewDownloader(basics.S3Client, func(d *manager.Downloader) {
  d.PartSize = partMiBs * 1024 * 1024
 })
 buffer := manager.NewWriteAtBuffer([]byte{})
 _, err := downloader.Download(ctx, buffer, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  log.Printf("Couldn't download large object from %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return buffer.Bytes(), err
```

```
}



// CopyToFolder copies an object in a bucket to a subfolder in the same bucket.
func (basics BucketBasics) CopyToFolder(ctx context.Context, bucketName string,
 objectKey string, folderName string) error {
 objectDest := fmt.Sprintf("%v/%v", folderName, objectKey)
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(bucketName),
  CopySource: aws.String(fmt.Sprintf("%v/%v", bucketName, objectKey)),
  Key:        aws.String(objectDest),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, bucketName)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectDest)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectDest)
  }
 }
 return err
}



// CopyToBucket copies an object in a bucket to another bucket.
func (basics BucketBasics) CopyToBucket(ctx context.Context, sourceBucket string,
 destinationBucket string, objectKey string) error {
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(destinationBucket),
  CopySource: aws.String(fmt.Sprintf("%v/%v", sourceBucket, objectKey)),
  Key:        aws.String(objectKey),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
```

```
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, sourceBucket)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(destinationBucket), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }
 return err
}



// ListObjects lists the objects in a bucket.
func (basics BucketBasics) ListObjects(ctx context.Context, bucketName string)
 ([]types.Object, error) {
 var err error
 var output *s3.ListObjectsV2Output
 input := &s3.ListObjectsV2Input{
  Bucket: aws.String(bucketName),
 }
 var objects []types.Object
 objectPaginator := s3.NewListObjectsV2Paginator(basics.S3Client, input)
 for objectPaginator.HasMorePages() {
  output, err = objectPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
   break
  } else {
   objects = append(objects, output.Contents...)
  }
 }
 return objects, err
}
```

```
// DeleteObjects deletes a list of objects from a bucket.
func (basics BucketBasics) DeleteObjects(ctx context.Context, bucketName string,
 objectKeys []string) error {
 var objectIds []types.ObjectIdentifier
 for _, key := range objectKeys {
  objectIds = append(objectIds, types.ObjectIdentifier{Key: aws.String(key)})
 }
 output, err := basics.S3Client.DeleteObjects(ctx, &s3.DeleteObjectsInput{
  Bucket: aws.String(bucketName),
  Delete: &types.Delete{Objects: objectIds, Quiet: aws.Bool(true)},
 })
 if err != nil || len(output.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucketName)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
  } else if len(output.Errors) > 0 {
   for _, outErr := range output.Errors {
    log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
   }
   err = fmt.Errorf("%s", *output.Errors[0].Message)
  }
 } else {
  for _, delObjs := range output.Deleted {
   err = s3.NewObjectNotExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key: delObjs.Key},
 time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to be deleted.\n",
 *delObjs.Key)
   } else {
    log.Printf("Deleted %s.\n", *delObjs.Key)
   }
  }
 }
 return err
}
```

```
// DeleteBucket deletes a bucket. The bucket must be empty or an error is returned.
func (basics BucketBasics) DeleteBucket(ctx context.Context, bucketName string)
 error {
 _, err := basics.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
  Bucket: aws.String(bucketName)})
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucketName)
   err = noBucket
  } else {
   log.Printf("Couldn't delete bucket %v. Here's why: %v\n", bucketName, err)
  }
 } else {
  err = s3.NewBucketNotExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucketName)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucketName)
  } else {
   log.Printf("Deleted %s.\n", bucketName)
  }
 }
 return err
}
```

Exécutez un scénario interactif qui vous montre comment utiliser les buckets et les objets S3.

```
import (
 "context"
 "fmt"
 "log"
 "os"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
```

```
)

// RunGetStartedScenario is an interactive example that shows you how to use Amazon
// Simple Storage Service (Amazon S3) to create an S3 bucket and use it to store
 objects.
//
// 1. Create a bucket.
// 2. Upload a local file to the bucket.
// 3. Download an object to a local file.
// 4. Copy an object to a different folder in the bucket.
// 5. List objects in the bucket.
// 6. Delete all objects in the bucket.
// 7. Delete the bucket.
//
// This example creates an Amazon S3 service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunGetStartedScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon S3 getting started demo.")
 log.Println(strings.Repeat("-", 88))

 s3Client := s3.NewFromConfig(sdkConfig)
 bucketBasics := actions.BucketBasics{S3Client: s3Client}

 count := 10
 log.Printf("Let's list up to %v buckets for your account:", count)
 buckets, err := bucketBasics.ListBuckets(ctx)
```

```
if err != nil {
 panic(err)
}
if len(buckets) == 0 {
 log.Println("You don't have any buckets!")
} else {
 if count > len(buckets) {
  count = len(buckets)
 }
 for _, bucket := range buckets[:count] {
  log.Printf("\t%v\n", *bucket.Name)
 }
}

bucketName := questioner.Ask("Let's create a bucket. Enter a name for your
bucket:",
 demotools.NotEmpty{})
bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
if err != nil {
 panic(err)
}
if !bucketExists {
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

fmt.Println("Let's upload a file to your bucket.")
smallFile := questioner.Ask("Enter the path to a file you want to upload:",
 demotools.NotEmpty{})
const smallKey = "doc-example-key"
err = bucketBasics.UploadFile(ctx, bucketName, smallKey, smallFile)
if err != nil {
 panic(err)
}
log.Printf("Uploaded %v as %v.\n", smallFile, smallKey)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's download %v to a file.", smallKey)
```

```
downloadFileName := questioner.Ask("Enter a name for the downloaded file:",
demotools.NotEmpty{})
err = bucketBasics.DownloadFile(ctx, bucketName, smallKey, downloadFileName)
if err != nil {
 panic(err)
}
log.Printf("File %v downloaded.", downloadFileName)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's copy %v to a folder in the same bucket.", smallKey)
folderName := questioner.Ask("Enter a folder name: ", demotools.NotEmpty{})
err = bucketBasics.CopyToFolder(ctx, bucketName, smallKey, folderName)
if err != nil {
 panic(err)
}
log.Printf("Copied %v to %v/%v.\n", smallKey, folderName, smallKey)
log.Println(strings.Repeat("-", 88))

log.Println("Let's list the objects in your bucket.")
questioner.Ask("Press Enter when you're ready.")
objects, err := bucketBasics.ListObjects(ctx, bucketName)
if err != nil {
 panic(err)
}
log.Printf("Found %v objects.\n", len(objects))
var objKeys []string
for _, object := range objects {
 objKeys = append(objKeys, *object.Key)
 log.Printf("\t%v\n", *object.Key)
}
log.Println(strings.Repeat("-", 88))

if questioner.AskBool("Do you want to delete your bucket and all of its "+
 "contents? (y/n)", "y") {
 log.Println("Deleting objects.")
 err = bucketBasics.DeleteObjects(ctx, bucketName, objKeys)
 if err != nil {
  panic(err)
 }
 log.Println("Deleting bucket.")
 err = bucketBasics.DeleteBucket(ctx, bucketName)
 if err != nil {
  panic(err)
 }
```

```
  log.Printf("Deleting downloaded file %v.\n", downloadFileName)
  err = os.Remove(downloadFileName)
  if err != nil {
   panic(err)
  }
 } else {
  log.Println("Okay. Don't forget to delete objects from your bucket to avoid
 charges.")
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObjects
  - GetObject
  - ListObjectsV2
  - PutObject

Actions

`CopyObject`

L'exemple de code suivant montre comment utiliser`CopyObject`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// CopyToBucket copies an object in a bucket to another bucket.
func (basics BucketBasics) CopyToBucket(ctx context.Context, sourceBucket string,
 destinationBucket string, objectKey string) error {
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(destinationBucket),
  CopySource: aws.String(fmt.Sprintf("%v/%v", sourceBucket, objectKey)),
```

```
  Key:        aws.String(objectKey),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, sourceBucket)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(destinationBucket), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous CopyObjectà la section Référence des AWS SDK pour Go API.

`CreateBucket`

L'exemple de code suivant montre comment utiliser`CreateBucket`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Créez un bucket avec la configuration par défaut.

```
import (
```

```
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// CreateBucket creates a bucket with the specified name in the specified Region.
func (basics BucketBasics) CreateBucket(ctx context.Context, name string, region
 string) error {
 _, err := basics.S3Client.CreateBucket(ctx, &s3.CreateBucketInput{
  Bucket: aws.String(name),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 })
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", name)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", name)
   err = exists
```

```
  }
 } else {
  err = s3.NewBucketExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", name)
  }
 }
 return err
}
```

Créez un compartiment avec verrouillage d'objets et attendez qu'il existe.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// CreateBucketWithLock creates a new S3 bucket with optional object locking enabled
// and waits for the bucket to exist before returning.
func (actor S3Actions) CreateBucketWithLock(ctx context.Context, bucket string,
 region string, enableObjectLock bool) (string, error) {
```

```
 input := &s3.CreateBucketInput{
  Bucket: aws.String(bucket),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 }

 if enableObjectLock {
  input.ObjectLockEnabledForBucket = aws.Bool(true)
 }

 _, err := actor.S3Client.CreateBucket(ctx, input)
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", bucket)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", bucket)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", bucket)
  }
 }

 return bucket, err
}
```

- Pour plus de détails sur l'API, reportez-vous CreateBucketà la section Référence des AWS SDK pour Go API.

`DeleteBucket`

L'exemple de code suivant montre comment utiliser`DeleteBucket`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// DeleteBucket deletes a bucket. The bucket must be empty or an error is returned.
func (basics BucketBasics) DeleteBucket(ctx context.Context, bucketName string)
 error {
 _, err := basics.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
  Bucket: aws.String(bucketName)})
 if err != nil {
```

```
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucketName)
   err = noBucket
  } else {
   log.Printf("Couldn't delete bucket %v. Here's why: %v\n", bucketName, err)
  }
 } else {
  err = s3.NewBucketNotExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucketName)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucketName)
  } else {
   log.Printf("Deleted %s.\n", bucketName)
  }
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteBucketà la section Référence des AWS SDK pour Go API.

`DeleteObject`

L'exemple de code suivant montre comment utiliser`DeleteObject`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
```

```
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// DeleteObject deletes an object from a bucket.
func (actor S3Actions) DeleteObject(ctx context.Context, bucket string, key string,
 versionId string, bypassGovernance bool) (bool, error) {
 deleted := false
 input := &s3.DeleteObjectInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 _, err := actor.S3Client.DeleteObject(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "AccessDenied":
    log.Printf("Access denied: cannot delete object %s from %s.\n", key, bucket)
```

```
    err = nil
   case "InvalidArgument":
    if bypassGovernance {
     log.Printf("You cannot specify bypass governance on a bucket without lock
 enabled.")
     err = nil
    }
   }
  }
 } else {
  err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: aws.String(key)},
 time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s in bucket %s to be deleted.\n",
 key, bucket)
  } else {
   deleted = true
  }
 }
 return deleted, err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteObjectà la section Référence des AWS SDK pour Go API.

`DeleteObjects`

L'exemple de code suivant montre comment utiliser`DeleteObjects`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// DeleteObjects deletes a list of objects from a bucket.
func (actor S3Actions) DeleteObjects(ctx context.Context, bucket string, objects
 []types.ObjectIdentifier, bypassGovernance bool) error {
 if len(objects) == 0 {
  return nil
 }

 input := s3.DeleteObjectsInput{
  Bucket: aws.String(bucket),
  Delete: &types.Delete{
   Objects: objects,
   Quiet:   aws.Bool(true),
  },
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 delOut, err := actor.S3Client.DeleteObjects(ctx, &input)
 if err != nil || len(delOut.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucket)
  if err != nil {
```

```
    var noBucket *types.NoSuchBucket
    if errors.As(err, &noBucket) {
     log.Printf("Bucket %s does not exist.\n", bucket)
     err = noBucket
    }
   } else if len(delOut.Errors) > 0 {
    for _, outErr := range delOut.Errors {
     log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
    }
    err = fmt.Errorf("%s", *delOut.Errors[0].Message)
   }
  } else {
   for _, delObjs := range delOut.Deleted {
    err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
     ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: delObjs.Key},
  time.Minute)
    if err != nil {
     log.Printf("Failed attempt to wait for object %s to be deleted.\n",
  *delObjs.Key)
    } else {
     log.Printf("Deleted %s.\n", *delObjs.Key)
    }
   }
  }
  return err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteObjectsà la section Référence des AWS SDK pour Go API.

`GetObject`

L'exemple de code suivant montre comment utiliser`GetObject`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// DownloadFile gets an object from a bucket and stores it in a local file.
func (basics BucketBasics) DownloadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 result, err := basics.S3Client.GetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
```

```
 })
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Can't get object %s from bucket %s. No such key exists.\n",
 objectKey, bucketName)
   err = noKey
  } else {
   log.Printf("Couldn't get object %v:%v. Here's why: %v\n", bucketName, objectKey,
 err)
  }
  return err
 }
 defer result.Body.Close()
 file, err := os.Create(fileName)
 if err != nil {
  log.Printf("Couldn't create file %v. Here's why: %v\n", fileName, err)
  return err
 }
 defer file.Close()
 body, err := io.ReadAll(result.Body)
 if err != nil {
  log.Printf("Couldn't read object body from %v. Here's why: %v\n", objectKey, err)
 }
 _, err = file.Write(body)
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous GetObjectà la section Référence des AWS SDK pour Go API.

`GetObjectLegalHold`

L'exemple de code suivant montre comment utiliser`GetObjectLegalHold`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectLegalHold retrieves the legal hold status for an S3 object.
func (actor S3Actions) GetObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string) (*types.ObjectLockLegalHoldStatus, error) {
 var status *types.ObjectLockLegalHoldStatus
 input := &s3.GetObjectLegalHoldInput{
  Bucket:    aws.String(bucket),
  Key:       aws.String(key),
  VersionId: aws.String(versionId),
 }
```

```
 output, err := actor.S3Client.GetObjectLegalHold(ctx, input)
 if err != nil {
  var noSuchKeyErr *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noSuchKeyErr) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noSuchKeyErr
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    log.Printf("Object %s does not have an object lock configuration.\n", key)
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
    err = nil
   }
  }
 } else {
  status = &output.LegalHold.Status
 }

 return status, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetObjectLegalHoldà la section Référence des AWS SDK pour Go API.

`GetObjectLockConfiguration`

L'exemple de code suivant montre comment utiliser`GetObjectLockConfiguration`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectLockConfiguration retrieves the object lock configuration for an S3
 bucket.
func (actor S3Actions) GetObjectLockConfiguration(ctx context.Context, bucket
 string) (*types.ObjectLockConfiguration, error) {
 var lockConfig *types.ObjectLockConfiguration
 input := &s3.GetObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
 }

 output, err := actor.S3Client.GetObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  } else if errors.As(err, &apiErr) && apiErr.ErrorCode() ==
 "ObjectLockConfigurationNotFoundError" {
   log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
```

```
    err = nil
   }
  } else {
   lockConfig = output.ObjectLockConfiguration
  }

  return lockConfig, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetObjectLockConfigurationà la section Référence des AWS SDK pour Go API.

`GetObjectRetention`

L'exemple de code suivant montre comment utiliser`GetObjectRetention`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)
```

```
// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectRetention retrieves the object retention configuration for an S3 object.
func (actor S3Actions) GetObjectRetention(ctx context.Context, bucket string, key
 string) (*types.ObjectLockRetention, error) {
 var retention *types.ObjectLockRetention
 input := &s3.GetObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }

 output, err := actor.S3Client.GetObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have locking enabled.", bucket)
    err = nil
   }
  }
 } else {
  retention = output.Retention
 }

 return retention, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetObjectRetentionà la section Référence des AWS SDK pour Go API.

`HeadBucket`

L'exemple de code suivant montre comment utiliser`HeadBucket`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}
```

```
// BucketExists checks whether a bucket exists in the current account.
func (basics BucketBasics) BucketExists(ctx context.Context, bucketName string)
 (bool, error) {
 _, err := basics.S3Client.HeadBucket(ctx, &s3.HeadBucketInput{
  Bucket: aws.String(bucketName),
 })
 exists := true
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NotFound:
    log.Printf("Bucket %v is available.\n", bucketName)
    exists = false
    err = nil
   default:
    log.Printf("Either you don't have access to bucket %v or another error occurred.
 "+
     "Here's what happened: %v\n", bucketName, err)
   }
  }
 } else {
  log.Printf("Bucket %v exists and you already own it.", bucketName)
 }

 return exists, err
}
```

- Pour plus de détails sur l'API, reportez-vous HeadBucketà la section Référence des AWS SDK pour Go API.

`ListBuckets`

L'exemple de code suivant montre comment utiliser`ListBuckets`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// ListBuckets lists the buckets in the current account.
func (basics BucketBasics) ListBuckets(ctx context.Context) ([]types.Bucket, error)
 {
 var err error
 var output *s3.ListBucketsOutput
 var buckets []types.Bucket
```

```
 bucketPaginator := s3.NewListBucketsPaginator(basics.S3Client,
 &s3.ListBucketsInput{})
 for bucketPaginator.HasMorePages() {
  output, err = bucketPaginator.NextPage(ctx)
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "AccessDenied" {
    fmt.Println("You don't have permission to list buckets for this account.")
    err = apiErr
   } else {
    log.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
   }
   break
  } else {
   buckets = append(buckets, output.Buckets...)
  }
 }
 return buckets, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListBucketsà la section Référence des AWS SDK pour Go API.

`ListObjectVersions`

L'exemple de code suivant montre comment utiliser`ListObjectVersions`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
```

```
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// ListObjectVersions lists all versions of all objects in a bucket.
func (actor S3Actions) ListObjectVersions(ctx context.Context, bucket string)
 ([]types.ObjectVersion, error) {
 var err error
 var output *s3.ListObjectVersionsOutput
 var versions []types.ObjectVersion
 input := &s3.ListObjectVersionsInput{Bucket: aws.String(bucket)}
 versionPaginator := s3.NewListObjectVersionsPaginator(actor.S3Client, input)
 for versionPaginator.HasMorePages() {
  output, err = versionPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
   break
  } else {
   versions = append(versions, output.Versions...)
  }
 }
 return versions, err
}
```

- Pour plus de détails sur l'API, reportez-vous ListObjectVersionsà la section Référence des AWS SDK pour Go API.

`ListObjectsV2`

L'exemple de code suivant montre comment utiliser`ListObjectsV2`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
```

```
}



// ListObjects lists the objects in a bucket.
func (basics BucketBasics) ListObjects(ctx context.Context, bucketName string)
 ([]types.Object, error) {
 var err error
 var output *s3.ListObjectsV2Output
 input := &s3.ListObjectsV2Input{
  Bucket: aws.String(bucketName),
 }
 var objects []types.Object
 objectPaginator := s3.NewListObjectsV2Paginator(basics.S3Client, input)
 for objectPaginator.HasMorePages() {
  output, err = objectPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
   break
  } else {
   objects = append(objects, output.Contents...)
  }
 }
 return objects, err
}
```

- Pour plus de détails sur l'API, consultez la section ListObjectsV2 dans le AWS SDK pour Go manuel de référence des API.

`PutObject`

L'exemple de code suivant montre comment utiliser`PutObject`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Placez un objet dans un compartiment à l'aide de l'API de bas niveau.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// UploadFile reads from a file and puts the data into an object in a bucket.
func (basics BucketBasics) UploadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 file, err := os.Open(fileName)
 if err != nil {
```

```
  log.Printf("Couldn't open file %v to upload. Here's why: %v\n", fileName, err)
 } else {
  defer file.Close()
  _, err = basics.S3Client.PutObject(ctx, &s3.PutObjectInput{
   Bucket: aws.String(bucketName),
   Key:    aws.String(objectKey),
   Body:   file,
  })
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
    log.Printf("Error while uploading object to %s. The object is too large.\n"+
     "To upload objects larger than 5GB, use the S3 console (160GB max)\n"+
     "or the multipart upload API (5TB max).", bucketName)
   } else {
    log.Printf("Couldn't upload file %v to %v:%v. Here's why: %v\n",
     fileName, bucketName, objectKey, err)
   }
  } else {
   err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
   }
  }
 }
 return err
}
```

Téléchargez un objet dans un bucket à l'aide d'un gestionnaire de transferts.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// UploadObject uses the S3 upload manager to upload an object to a bucket.
func (actor S3Actions) UploadObject(ctx context.Context, bucket string, key string,
 contents string) (string, error) {
 var outKey string
 input := &s3.PutObjectInput{
  Bucket:            aws.String(bucket),
  Key:               aws.String(key),
  Body:              bytes.NewReader([]byte(contents)),
  ChecksumAlgorithm: types.ChecksumAlgorithmSha256,
 }
 output, err := actor.S3Manager.Upload(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 } else {
  err := s3.NewObjectExistsWaiter(actor.S3Client).Wait(ctx, &s3.HeadObjectInput{
   Bucket: aws.String(bucket),
   Key:    aws.String(key),
  }, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist in %s.\n", key, bucket)
  } else {
   outKey = *output.Key
  }
 }
 return outKey, err
```

```
}
```

- Pour plus de détails sur l'API, reportez-vous PutObjectà la section Référence des AWS SDK pour Go API.

`PutObjectLegalHold`

L'exemple de code suivant montre comment utiliser`PutObjectLegalHold`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}
```

```
// PutObjectLegalHold sets the legal hold configuration for an S3 object.
func (actor S3Actions) PutObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string, legalHoldStatus types.ObjectLockLegalHoldStatus) error {
 input := &s3.PutObjectLegalHoldInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  LegalHold: &types.ObjectLockLegalHold{
   Status: legalHoldStatus,
  },
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
 }

 _, err := actor.S3Client.PutObjectLegalHold(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}
```

- Pour plus de détails sur l'API, reportez-vous PutObjectLegalHoldà la section Référence des AWS SDK pour Go API.

`PutObjectLockConfiguration`

L'exemple de code suivant montre comment utiliser`PutObjectLockConfiguration`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Définissez la configuration du verrouillage des objets d'un bucket.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// EnableObjectLockOnBucket enables object locking on an existing bucket.
func (actor S3Actions) EnableObjectLockOnBucket(ctx context.Context, bucket string)
 error {
 // Versioning must be enabled on the bucket before object locking is enabled.
 verInput := &s3.PutBucketVersioningInput{
  Bucket: aws.String(bucket),
  VersioningConfiguration: &types.VersioningConfiguration{
   MFADelete: types.MFADeleteDisabled,
   Status:    types.BucketVersioningStatusEnabled,
```

```
  },
 }
 _, err := actor.S3Client.PutBucketVersioning(ctx, verInput)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
  return err
 }

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: types.ObjectLockEnabledEnabled,
  },
 }
 _, err = actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

Définissez la période de rétention par défaut d'un bucket.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// ModifyDefaultBucketRetention modifies the default retention period of an existing
 bucket.
func (actor S3Actions) ModifyDefaultBucketRetention(
 ctx context.Context, bucket string, lockMode types.ObjectLockEnabled,
 retentionPeriod int32, retentionMode types.ObjectLockRetentionMode) error {

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: lockMode,
   Rule: &types.ObjectLockRule{
    DefaultRetention: &types.DefaultRetention{
     Days: aws.Int32(retentionPeriod),
     Mode: retentionMode,
    },
   },
  },
 }
 _, err := actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

- Pour plus de détails sur l'API, reportez-vous PutObjectLockConfigurationà la section Référence des AWS SDK pour Go API.

`PutObjectRetention`

L'exemple de code suivant montre comment utiliser`PutObjectRetention`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}
```

```
// PutObjectRetention sets the object retention configuration for an S3 object.
func (actor S3Actions) PutObjectRetention(ctx context.Context, bucket string, key
 string, retentionMode types.ObjectLockRetentionMode, retentionPeriodDays int32)
 error {
 input := &s3.PutObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  Retention: &types.ObjectLockRetention{
   Mode:            retentionMode,
   RetainUntilDate: aws.Time(time.Now().AddDate(0, 0, int(retentionPeriodDays))),
  },
  BypassGovernanceRetention: aws.Bool(true),
 }

 _, err := actor.S3Client.PutObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}
```

- Pour plus de détails sur l'API, reportez-vous PutObjectRetentionà la section Référence des AWS SDK pour Go API.

Scénarios

Créer une URL présignée

L'exemple de code suivant montre comment créer une URL présignée pour Amazon S3 et télécharger un objet.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Créez des fonctions qui enveloppent les actions de présignature S3.

```
import (
 "context"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 v4 "github.com/aws/aws-sdk-go-v2/aws/signer/v4"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

// Presigner encapsulates the Amazon Simple Storage Service (Amazon S3) presign
 actions
// used in the examples.
// It contains PresignClient, a client that is used to presign requests to Amazon
 S3.
// Presigned requests contain temporary credentials and can be made from any HTTP
 client.
type Presigner struct {
 PresignClient *s3.PresignClient
}



// GetObject makes a presigned request that can be used to get an object from a
 bucket.
// The presigned request is valid for the specified number of seconds.
func (presigner Presigner) GetObject(
 ctx context.Context, bucketName string, objectKey string, lifetimeSecs int64)
 (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignGetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
```

```
 }, func(opts *s3.PresignOptions) {
  opts.Expires = time.Duration(lifetimeSecs * int64(time.Second))
 })
 if err != nil {
  log.Printf("Couldn't get a presigned request to get %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return request, err
}



// PutObject makes a presigned request that can be used to put an object in a
 bucket.
// The presigned request is valid for the specified number of seconds.
func (presigner Presigner) PutObject(
 ctx context.Context, bucketName string, objectKey string, lifetimeSecs int64)
 (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignPutObject(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 }, func(opts *s3.PresignOptions) {
  opts.Expires = time.Duration(lifetimeSecs * int64(time.Second))
 })
 if err != nil {
  log.Printf("Couldn't get a presigned request to put %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return request, err
}



// DeleteObject makes a presigned request that can be used to delete an object from
 a bucket.
func (presigner Presigner) DeleteObject(ctx context.Context, bucketName string,
 objectKey string) (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignDeleteObject(ctx,
 &s3.DeleteObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
```

```
  log.Printf("Couldn't get a presigned request to delete object %v. Here's why: %v
\n", objectKey, err)
 }
 return request, err
}



func (presigner Presigner) PresignPostObject(ctx context.Context, bucketName string,
 objectKey string, lifetimeSecs int64) (*s3.PresignedPostRequest, error) {
 request, err := presigner.PresignClient.PresignPostObject(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 }, func(options *s3.PresignPostOptions) {
  options.Expires = time.Duration(lifetimeSecs) * time.Second
 })
 if err != nil {
  log.Printf("Couldn't get a presigned post request to put %v:%v. Here's why: %v\n",
 bucketName, objectKey, err)
 }
 return request, nil
}
```

Exécutez un exemple interactif qui génère et utilise Presigned URLs pour charger, télécharger et supprimer un objet S3.

```
import (
 "bytes"
 "context"
 "io"
 "log"
 "mime/multipart"
 "net/http"
 "os"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
```

```
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
)



// RunPresigningScenario is an interactive example that shows you how to get
 presigned
// HTTP requests that you can use to move data into and out of Amazon Simple Storage
// Service (Amazon S3). The presigned requests contain temporary credentials and can
// be used by an HTTP client.
//
// 1. Get a presigned request to put an object in a bucket.
// 2. Use the net/http package to use the presigned request to upload a local file
 to the bucket.
// 3. Get a presigned request to get an object from a bucket.
// 4. Use the net/http package to use the presigned request to download the object
 to a local file.
// 5. Get a presigned request to delete an object from a bucket.
// 6. Use the net/http package to use the presigned request to delete the object.
//
// This example creates an Amazon S3 presign client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
//
// It uses an IHttpRequester interface to abstract HTTP requests so they can be
 mocked
// during testing.
func RunPresigningScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner, httpRequester IHttpRequester) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()
```

```
log.Println(strings.Repeat("-", 88))
log.Println("Welcome to the Amazon S3 presigning demo.")
log.Println(strings.Repeat("-", 88))

s3Client := s3.NewFromConfig(sdkConfig)
bucketBasics := actions.BucketBasics{S3Client: s3Client}
presignClient := s3.NewPresignClient(s3Client)
presigner := actions.Presigner{PresignClient: presignClient}

bucketName := questioner.Ask("We'll need a bucket. Enter a name for a bucket "+
 "you own or one you want to create:", demotools.NotEmpty{})
bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
if err != nil {
 panic(err)
}
if !bucketExists {
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

log.Printf("Let's presign a request to upload a file to your bucket.")
uploadFilename := questioner.Ask("Enter the path to a file you want to upload:",
 demotools.NotEmpty{})
uploadKey := questioner.Ask("What would you like to name the uploaded object?",
 demotools.NotEmpty{})
uploadFile, err := os.Open(uploadFilename)
if err != nil {
 panic(err)
}
defer uploadFile.Close()
presignedPutRequest, err := presigner.PutObject(ctx, bucketName, uploadKey, 60)
if err != nil {
 panic(err)
}
log.Printf("Got a presigned %v request to URL:\n\t%v\n",
presignedPutRequest.Method,
 presignedPutRequest.URL)
log.Println("Using net/http to send the request...")
info, err := uploadFile.Stat()
```

```
if err != nil {
 panic(err)
}
putResponse, err := httpRequester.Put(presignedPutRequest.URL, info.Size(),
uploadFile)
if err != nil {
 panic(err)
}
log.Printf("%v object %v with presigned URL returned %v.",
presignedPutRequest.Method,
 uploadKey, putResponse.StatusCode)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's presign a request to download the object.")
questioner.Ask("Press Enter when you're ready.")
presignedGetRequest, err := presigner.GetObject(ctx, bucketName, uploadKey, 60)
if err != nil {
 panic(err)
}
log.Printf("Got a presigned %v request to URL:\n\t%v\n",
presignedGetRequest.Method,
 presignedGetRequest.URL)
log.Println("Using net/http to send the request...")
getResponse, err := httpRequester.Get(presignedGetRequest.URL)
if err != nil {
 panic(err)
}
log.Printf("%v object %v with presigned URL returned %v.",
presignedGetRequest.Method,
 uploadKey, getResponse.StatusCode)
defer getResponse.Body.Close()
downloadBody, err := io.ReadAll(getResponse.Body)
if err != nil {
 panic(err)
}
log.Printf("Downloaded %v bytes. Here are the first 100 of them:\n",
len(downloadBody))
log.Println(strings.Repeat("-", 88))
log.Println(string(downloadBody[:100]))
log.Println(strings.Repeat("-", 88))

log.Println("Now we'll create a new request to put the same object using a
presigned post request")
questioner.Ask("Press Enter when you're ready.")
```

```
 presignPostRequest, err := presigner.PresignPostObject(ctx, bucketName, uploadKey,
 60)
 if err != nil {
  panic(err)
 }
 log.Printf("Got a presigned post request to url %v with values %v\n",
 presignPostRequest.URL, presignPostRequest.Values)
 log.Println("Using net/http multipart to send the request...")
 uploadFile, err = os.Open(uploadFilename)
 if err != nil {
  panic(err)
 }
 defer uploadFile.Close()
 multiPartResponse, err := sendMultipartRequest(presignPostRequest.URL,
 presignPostRequest.Values, uploadFile, uploadKey, httpRequester)
 if err != nil {
  panic(err)
 }
 log.Printf("Presign post object %v with presigned URL returned %v.", uploadKey,
 multiPartResponse.StatusCode)

 log.Println("Let's presign a request to delete the object.")
 questioner.Ask("Press Enter when you're ready.")
 presignedDelRequest, err := presigner.DeleteObject(ctx, bucketName, uploadKey)
 if err != nil {
  panic(err)
 }
 log.Printf("Got a presigned %v request to URL:\n\t%v\n",
 presignedDelRequest.Method,
  presignedDelRequest.URL)
 log.Println("Using net/http to send the request...")
 delResponse, err := httpRequester.Delete(presignedDelRequest.URL)
 if err != nil {
  panic(err)
 }
 log.Printf("%v object %v with presigned URL returned %v.\n",
 presignedDelRequest.Method,
  uploadKey, delResponse.StatusCode)
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez un wrapper de requête HTTP utilisé par l'exemple pour effectuer des requêtes HTTP.

```
// IHttpRequester abstracts HTTP requests into an interface so it can be mocked
 during
// unit testing.
type IHttpRequester interface {
 Get(url string) (resp *http.Response, err error)
 Post(url, contentType string, body io.Reader) (resp *http.Response, err error)
 Put(url string, contentLength int64, body io.Reader) (resp *http.Response, err
 error)
 Delete(url string) (resp *http.Response, err error)
}

// HttpRequester uses the net/http package to make HTTP requests during the
 scenario.
type HttpRequester struct{}

func (httpReq HttpRequester) Get(url string) (resp *http.Response, err error) {
 return http.Get(url)
}
func (httpReq HttpRequester) Post(url, contentType string, body io.Reader) (resp
 *http.Response, err error) {
 postRequest, err := http.NewRequest("POST", url, body)
 if err != nil {
  return nil, err
 }
 postRequest.Header.Set("Content-Type", contentType)
 return http.DefaultClient.Do(postRequest)
}

func (httpReq HttpRequester) Put(url string, contentLength int64, body io.Reader)
 (resp *http.Response, err error) {
 putRequest, err := http.NewRequest("PUT", url, body)
 if err != nil {
  return nil, err
 }
 putRequest.ContentLength = contentLength
 return http.DefaultClient.Do(putRequest)
}
func (httpReq HttpRequester) Delete(url string) (resp *http.Response, err error) {
```

```
 delRequest, err := http.NewRequest("DELETE", url, nil)
 if err != nil {
  return nil, err
 }
 return http.DefaultClient.Do(delRequest)
}
```

Verrouiller des objets Amazon S3

L'exemple de code suivant montre comment utiliser les fonctionnalités de verrouillage d'objets S3.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif illustrant les fonctionnalités de verrouillage d'objets d'Amazon S3.

```
import (
 "context"
 "fmt"
 "log"
 "strings"

 "s3_object_lock/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ObjectLockScenario contains the steps to run the S3 Object Lock workflow.
type ObjectLockScenario struct {
 questioner demotools.IQuestioner
```

```
 resources  Resources
 s3Actions  *actions.S3Actions
 sdkConfig  aws.Config
}

// NewObjectLockScenario constructs a new ObjectLockScenario instance.
func NewObjectLockScenario(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ObjectLockScenario {
 scenario := ObjectLockScenario{
  questioner: questioner,
  resources:  Resources{},
  s3Actions:  &actions.S3Actions{S3Client: s3.NewFromConfig(sdkConfig)},
  sdkConfig:  sdkConfig,
 }
 scenario.s3Actions.S3Manager = manager.NewUploader(scenario.s3Actions.S3Client)
 scenario.resources.init(scenario.s3Actions, questioner)
 return scenario
}

type nameLocked struct {
 name   string
 locked bool
}

var createInfo = []nameLocked{
 {"standard-bucket", false},
 {"lock-bucket", true},
 {"retention-bucket", false},
}

// CreateBuckets creates the S3 buckets required for the workflow.
func (scenario *ObjectLockScenario) CreateBuckets(ctx context.Context) {
 log.Println("Let's create some S3 buckets to use for this workflow.")
 success := false
 for !success {
  prefix := scenario.questioner.Ask(
   "This example creates three buckets. Enter a prefix to name your buckets
 (remember bucket names must be globally unique):")

  for _, info := range createInfo {
   log.Println(fmt.Sprintf("%s.%s", prefix, info.name))
   bucketName, err := scenario.s3Actions.CreateBucketWithLock(ctx, fmt.Sprintf("%s.
%s", prefix, info.name), scenario.sdkConfig.Region, info.locked)
   if err != nil {
```

```
    switch err.(type) {
    case *types.BucketAlreadyExists, *types.BucketAlreadyOwnedByYou:
     log.Printf("Couldn't create bucket %s.\n", bucketName)
    default:
     panic(err)
    }
    break
   }
   scenario.resources.demoBuckets[info.name] = &DemoBucket{
    name:       bucketName,
    objectKeys: []string{},
   }
   log.Printf("Created bucket %s.\n", bucketName)
  }

  if len(scenario.resources.demoBuckets) < len(createInfo) {
   scenario.resources.deleteBuckets(ctx)
  } else {
   success = true
  }
 }

 log.Println("S3 buckets created.")
 log.Println(strings.Repeat("-", 88))
}

// EnableLockOnBucket enables object locking on an existing bucket.
func (scenario *ObjectLockScenario) EnableLockOnBucket(ctx context.Context) {
 log.Println("\nA bucket can be configured to use object locking.")
 scenario.questioner.Ask("Press Enter to continue.")

 var err error
 bucket := scenario.resources.demoBuckets["retention-bucket"]
 err = scenario.s3Actions.EnableObjectLockOnBucket(ctx, bucket.name)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("Couldn't enable object locking on bucket %s.\n", bucket.name)
  default:
   panic(err)
  }
 } else {
  log.Printf("Object locking enabled on bucket %s.", bucket.name)
 }
```

```
 log.Println(strings.Repeat("-", 88))
}

// SetDefaultRetentionPolicy sets a default retention governance policy on a bucket.
func (scenario *ObjectLockScenario) SetDefaultRetentionPolicy(ctx context.Context) {
 log.Println("\nA bucket can be configured to use object locking with a default
 retention period.")

 bucket := scenario.resources.demoBuckets["retention-bucket"]
 retentionPeriod := scenario.questioner.AskInt("Enter the default retention period
 in days: ")
 err := scenario.s3Actions.ModifyDefaultBucketRetention(ctx,
 bucket.name, types.ObjectLockEnabledEnabled, int32(retentionPeriod),
 types.ObjectLockRetentionModeGovernance)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("Couldn't configure a default retention period on bucket %s.\n",
 bucket.name)
  default:
   panic(err)
  }
 } else {
  log.Printf("Default retention policy set on bucket %s with %d day retention
 period.", bucket.name, retentionPeriod)
  bucket.retentionEnabled = true
 }

 log.Println(strings.Repeat("-", 88))
}

// UploadTestObjects uploads test objects to the S3 buckets.
func (scenario *ObjectLockScenario) UploadTestObjects(ctx context.Context) {
 log.Println("Uploading test objects to S3 buckets.")

 for _, info := range createInfo {
  bucket := scenario.resources.demoBuckets[info.name]
  for i := 0; i < 2; i++ {
   key, err := scenario.s3Actions.UploadObject(ctx, bucket.name,
 fmt.Sprintf("example-%d", i),
    fmt.Sprintf("Example object content #%d in bucket %s.", i, bucket.name))
   if err != nil {
    switch err.(type) {
```

```
    case *types.NoSuchBucket:
     log.Printf("Couldn't upload %s to bucket %s.\n", key, bucket.name)
    default:
     panic(err)
    }
   } else {
    log.Printf("Uploaded %s to bucket %s.\n", key, bucket.name)
    bucket.objectKeys = append(bucket.objectKeys, key)
   }
  }
 }

 scenario.questioner.Ask("Test objects uploaded. Press Enter to continue.")
 log.Println(strings.Repeat("-", 88))
}

// SetObjectLockConfigurations sets object lock configurations on the test objects.
func (scenario *ObjectLockScenario) SetObjectLockConfigurations(ctx context.Context)
 {
 log.Println("Now let's set object lock configurations on individual objects.")

 buckets := []*DemoBucket{scenario.resources.demoBuckets["lock-bucket"],
 scenario.resources.demoBuckets["retention-bucket"]}
 for _, bucket := range buckets {
  for index, objKey := range bucket.objectKeys {
   switch index {
   case 0:
    if scenario.questioner.AskBool(fmt.Sprintf("\nDo you want to add a legal hold to
 %s in %s (y/n)? ", objKey, bucket.name), "y") {
     err := scenario.s3Actions.PutObjectLegalHold(ctx, bucket.name, objKey, "",
 types.ObjectLockLegalHoldStatusOn)
     if err != nil {
      switch err.(type) {
      case *types.NoSuchKey:
       log.Printf("Couldn't set legal hold on %s.\n", objKey)
      default:
       panic(err)
      }
     } else {
      log.Printf("Legal hold set on %s.\n", objKey)
     }
    }
   case 1:
```

```
    q := fmt.Sprintf("\nDo you want to add a 1 day Governance retention period to %s
 in %s?\n"+
     "Reminder: Only a user with the s3:BypassGovernanceRetention permission is able
 to delete this object\n"+
     "or its bucket until the retention period has expired. (y/n) ", objKey,
 bucket.name)
    if scenario.questioner.AskBool(q, "y") {
     err := scenario.s3Actions.PutObjectRetention(ctx, bucket.name, objKey,
 types.ObjectLockRetentionModeGovernance, 1)
     if err != nil {
      switch err.(type) {
      case *types.NoSuchKey:
       log.Printf("Couldn't set retention period on %s in %s.\n", objKey,
 bucket.name)
      default:
       panic(err)
      }
     } else {
      log.Printf("Retention period set to 1 for %s.", objKey)
      bucket.retentionEnabled = true
     }
    }
   }
  }
 }
 log.Println(strings.Repeat("-", 88))
}

const (
 ListAll = iota
 DeleteObject
 DeleteRetentionObject
 OverwriteObject
 ViewRetention
 ViewLegalHold
 Finish
)

// InteractWithObjects allows the user to interact with the objects and test the
 object lock configurations.
func (scenario *ObjectLockScenario) InteractWithObjects(ctx context.Context) {
 log.Println("Now you can interact with the objects to explore the object lock
 configurations.")
 interactiveChoices := []string{
```

```
 "List all objects and buckets.",
 "Attempt to delete an object.",
 "Attempt to delete an object with retention period bypass.",
 "Attempt to overwrite a file.",
 "View the retention settings for an object.",
 "View the legal hold settings for an object.",
 "Finish the workflow."}

choice := ListAll
for choice != Finish {
 objList := scenario.GetAllObjects(ctx)
 objChoices := scenario.makeObjectChoiceList(objList)
 choice = scenario.questioner.AskChoice("Choose an action from the menu:\n",
interactiveChoices)
 switch choice {
 case ListAll:
  log.Println("The current objects in the example buckets are:")
  for _, objChoice := range objChoices {
   log.Println("\t", objChoice)
  }
 case DeleteObject, DeleteRetentionObject:
  objChoice := scenario.questioner.AskChoice("Enter the number of the object to
delete:\n", objChoices)
  obj := objList[objChoice]
  deleted, err := scenario.s3Actions.DeleteObject(ctx, obj.bucket, obj.key,
obj.versionId, choice == DeleteRetentionObject)
  if err != nil {
   switch err.(type) {
   case *types.NoSuchKey:
    log.Println("Nothing to delete.")
   default:
    panic(err)
   }
  } else if deleted {
   log.Printf("Object %s deleted.\n", obj.key)
  }
 case OverwriteObject:
  objChoice := scenario.questioner.AskChoice("Enter the number of the object to
overwrite:\n", objChoices)
  obj := objList[objChoice]
  _, err := scenario.s3Actions.UploadObject(ctx, obj.bucket, obj.key,
fmt.Sprintf("New content in object %s.", obj.key))
  if err != nil {
   switch err.(type) {
```

```
    case *types.NoSuchBucket:
     log.Println("Couldn't upload to nonexistent bucket.")
    default:
     panic(err)
    }
   } else {
    log.Printf("Uploaded new content to object %s.\n", obj.key)
   }
  case ViewRetention:
   objChoice := scenario.questioner.AskChoice("Enter the number of the object to
view:\n", objChoices)
   obj := objList[objChoice]
   retention, err := scenario.s3Actions.GetObjectRetention(ctx, obj.bucket, obj.key)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
     log.Printf("Can't get retention configuration for %s.\n", obj.key)
    default:
     panic(err)
    }
   } else if retention != nil {
    log.Printf("Object %s has retention mode %s until %v.\n", obj.key,
retention.Mode, retention.RetainUntilDate)
   } else {
    log.Printf("Object %s does not have object retention configured.\n", obj.key)
   }
  case ViewLegalHold:
   objChoice := scenario.questioner.AskChoice("Enter the number of the object to
view:\n", objChoices)
   obj := objList[objChoice]
   legalHold, err := scenario.s3Actions.GetObjectLegalHold(ctx, obj.bucket, obj.key,
obj.versionId)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
     log.Printf("Can't get legal hold configuration for %s.\n", obj.key)
    default:
     panic(err)
    }
   } else if legalHold != nil {
    log.Printf("Object %s has legal hold %v.", obj.key, *legalHold)
   } else {
    log.Printf("Object %s does not have legal hold configured.", obj.key)
   }
```

```
  case Finish:
   log.Println("Let's clean up.")
  }
  log.Println(strings.Repeat("-", 88))
 }
}

type BucketKeyVersionId struct {
 bucket    string
 key       string
 versionId string
}

// GetAllObjects gets the object versions in the example S3 buckets and returns them
 in a flattened list.
func (scenario *ObjectLockScenario) GetAllObjects(ctx context.Context)
 []BucketKeyVersionId {
 var objectList []BucketKeyVersionId
 for _, info := range createInfo {
  bucket := scenario.resources.demoBuckets[info.name]
  versions, err := scenario.s3Actions.ListObjectVersions(ctx, bucket.name)
  if err != nil {
   switch err.(type) {
   case *types.NoSuchBucket:
    log.Printf("Couldn't get object versions for %s.\n", bucket.name)
   default:
    panic(err)
   }
  } else {
   for _, version := range versions {
    objectList = append(objectList,
     BucketKeyVersionId{bucket: bucket.name, key: *version.Key, versionId:
 *version.VersionId})
   }
  }
 }
 return objectList
}

// makeObjectChoiceList makes the object version list into a list of strings that
 are displayed
// as choices.
func (scenario *ObjectLockScenario) makeObjectChoiceList(bucketObjects
 []BucketKeyVersionId) []string {
```

```
 choices := make([]string, len(bucketObjects))
 for i := 0; i < len(bucketObjects); i++ {
  choices[i] = fmt.Sprintf("%s in %s with VersionId %s.",
   bucketObjects[i].key, bucketObjects[i].bucket, bucketObjects[i].versionId)
 }
 return choices
}

// Run runs the S3 Object Lock scenario.
func (scenario *ObjectLockScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := scenario.questioner.(*demotools.MockQuestioner)
   if isMock || scenario.questioner.AskBool("Do you want to see the full error
 message (y/n)?", "y") {
    log.Println(r)
   }
   scenario.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon S3 Object Lock Feature Scenario.")
 log.Println(strings.Repeat("-", 88))

 scenario.CreateBuckets(ctx)
 scenario.EnableLockOnBucket(ctx)
 scenario.SetDefaultRetentionPolicy(ctx)
 scenario.UploadTestObjects(ctx)
 scenario.SetObjectLockConfigurations(ctx)
 scenario.InteractWithObjects(ctx)

 scenario.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure qui enveloppe les actions S3 utilisées dans cet exemple.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// CreateBucketWithLock creates a new S3 bucket with optional object locking enabled
// and waits for the bucket to exist before returning.
func (actor S3Actions) CreateBucketWithLock(ctx context.Context, bucket string,
 region string, enableObjectLock bool) (string, error) {
 input := &s3.CreateBucketInput{
  Bucket: aws.String(bucket),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 }

 if enableObjectLock {
  input.ObjectLockEnabledForBucket = aws.Bool(true)
 }

 _, err := actor.S3Client.CreateBucket(ctx, input)
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
```

```
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", bucket)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", bucket)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", bucket)
  }
 }

 return bucket, err
}



// GetObjectLegalHold retrieves the legal hold status for an S3 object.
func (actor S3Actions) GetObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string) (*types.ObjectLockLegalHoldStatus, error) {
 var status *types.ObjectLockLegalHoldStatus
 input := &s3.GetObjectLegalHoldInput{
  Bucket:    aws.String(bucket),
  Key:       aws.String(key),
  VersionId: aws.String(versionId),
 }

 output, err := actor.S3Client.GetObjectLegalHold(ctx, input)
 if err != nil {
  var noSuchKeyErr *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noSuchKeyErr) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noSuchKeyErr
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    log.Printf("Object %s does not have an object lock configuration.\n", key)
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
```

```
    err = nil
   }
  }
 } else {
  status = &output.LegalHold.Status
 }

 return status, err
}



// GetObjectLockConfiguration retrieves the object lock configuration for an S3
 bucket.
func (actor S3Actions) GetObjectLockConfiguration(ctx context.Context, bucket
 string) (*types.ObjectLockConfiguration, error) {
 var lockConfig *types.ObjectLockConfiguration
 input := &s3.GetObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
 }

 output, err := actor.S3Client.GetObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  } else if errors.As(err, &apiErr) && apiErr.ErrorCode() ==
 "ObjectLockConfigurationNotFoundError" {
   log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
   err = nil
  }
 } else {
  lockConfig = output.ObjectLockConfiguration
 }

 return lockConfig, err
}



// GetObjectRetention retrieves the object retention configuration for an S3 object.
```

```
func (actor S3Actions) GetObjectRetention(ctx context.Context, bucket string, key
 string) (*types.ObjectLockRetention, error) {
 var retention *types.ObjectLockRetention
 input := &s3.GetObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }

 output, err := actor.S3Client.GetObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have locking enabled.", bucket)
    err = nil
   }
  }
 } else {
  retention = output.Retention
 }

 return retention, err
}



// PutObjectLegalHold sets the legal hold configuration for an S3 object.
func (actor S3Actions) PutObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string, legalHoldStatus types.ObjectLockLegalHoldStatus) error {
 input := &s3.PutObjectLegalHoldInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  LegalHold: &types.ObjectLockLegalHold{
   Status: legalHoldStatus,
  },
 }
 if versionId != "" {
```

```
  input.VersionId = aws.String(versionId)
 }

 _, err := actor.S3Client.PutObjectLegalHold(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}



// ModifyDefaultBucketRetention modifies the default retention period of an existing
 bucket.
func (actor S3Actions) ModifyDefaultBucketRetention(
 ctx context.Context, bucket string, lockMode types.ObjectLockEnabled,
 retentionPeriod int32, retentionMode types.ObjectLockRetentionMode) error {

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: lockMode,
   Rule: &types.ObjectLockRule{
    DefaultRetention: &types.DefaultRetention{
     Days: aws.Int32(retentionPeriod),
     Mode: retentionMode,
    },
   },
  },
 }
 _, err := actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }
```

```
 return err
}



// EnableObjectLockOnBucket enables object locking on an existing bucket.
func (actor S3Actions) EnableObjectLockOnBucket(ctx context.Context, bucket string)
 error {
 // Versioning must be enabled on the bucket before object locking is enabled.
 verInput := &s3.PutBucketVersioningInput{
  Bucket: aws.String(bucket),
  VersioningConfiguration: &types.VersioningConfiguration{
   MFADelete: types.MFADeleteDisabled,
   Status:    types.BucketVersioningStatusEnabled,
  },
 }
 _, err := actor.S3Client.PutBucketVersioning(ctx, verInput)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
  return err
 }

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: types.ObjectLockEnabledEnabled,
  },
 }
 _, err = actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

```
// PutObjectRetention sets the object retention configuration for an S3 object.
func (actor S3Actions) PutObjectRetention(ctx context.Context, bucket string, key
 string, retentionMode types.ObjectLockRetentionMode, retentionPeriodDays int32)
 error {
 input := &s3.PutObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  Retention: &types.ObjectLockRetention{
   Mode:            retentionMode,
   RetainUntilDate: aws.Time(time.Now().AddDate(0, 0, int(retentionPeriodDays))),
  },
  BypassGovernanceRetention: aws.Bool(true),
 }

 _, err := actor.S3Client.PutObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}



// UploadObject uses the S3 upload manager to upload an object to a bucket.
func (actor S3Actions) UploadObject(ctx context.Context, bucket string, key string,
 contents string) (string, error) {
 var outKey string
 input := &s3.PutObjectInput{
  Bucket:            aws.String(bucket),
  Key:               aws.String(key),
  Body:              bytes.NewReader([]byte(contents)),
  ChecksumAlgorithm: types.ChecksumAlgorithmSha256,
 }
 output, err := actor.S3Manager.Upload(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
```

```
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 } else {
  err := s3.NewObjectExistsWaiter(actor.S3Client).Wait(ctx, &s3.HeadObjectInput{
   Bucket: aws.String(bucket),
   Key:    aws.String(key),
  }, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist in %s.\n", key, bucket)
  } else {
   outKey = *output.Key
  }
 }
 return outKey, err
}



// ListObjectVersions lists all versions of all objects in a bucket.
func (actor S3Actions) ListObjectVersions(ctx context.Context, bucket string)
 ([]types.ObjectVersion, error) {
 var err error
 var output *s3.ListObjectVersionsOutput
 var versions []types.ObjectVersion
 input := &s3.ListObjectVersionsInput{Bucket: aws.String(bucket)}
 versionPaginator := s3.NewListObjectVersionsPaginator(actor.S3Client, input)
 for versionPaginator.HasMorePages() {
  output, err = versionPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
   break
  } else {
   versions = append(versions, output.Versions...)
  }
 }
 return versions, err
}
```

```
// DeleteObject deletes an object from a bucket.
func (actor S3Actions) DeleteObject(ctx context.Context, bucket string, key string,
 versionId string, bypassGovernance bool) (bool, error) {
 deleted := false
 input := &s3.DeleteObjectInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 _, err := actor.S3Client.DeleteObject(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "AccessDenied":
    log.Printf("Access denied: cannot delete object %s from %s.\n", key, bucket)
    err = nil
   case "InvalidArgument":
    if bypassGovernance {
     log.Printf("You cannot specify bypass governance on a bucket without lock
enabled.")
     err = nil
    }
   }
  }
 } else {
  err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: aws.String(key)},
time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s in bucket %s to be deleted.\n",
key, bucket)
  } else {
   deleted = true
```

```
  }
 }
 return deleted, err
}



// DeleteObjects deletes a list of objects from a bucket.
func (actor S3Actions) DeleteObjects(ctx context.Context, bucket string, objects
 []types.ObjectIdentifier, bypassGovernance bool) error {
 if len(objects) == 0 {
  return nil
 }

 input := s3.DeleteObjectsInput{
  Bucket: aws.String(bucket),
  Delete: &types.Delete{
   Objects: objects,
   Quiet:   aws.Bool(true),
  },
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 delOut, err := actor.S3Client.DeleteObjects(ctx, &input)
 if err != nil || len(delOut.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucket)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
  } else if len(delOut.Errors) > 0 {
   for _, outErr := range delOut.Errors {
    log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
   }
   err = fmt.Errorf("%s", *delOut.Errors[0].Message)
  }
 } else {
  for _, delObjs := range delOut.Deleted {
   err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: delObjs.Key},
 time.Minute)
```

```
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to be deleted.\n",
 *delObjs.Key)
   } else {
    log.Printf("Deleted %s.\n", *delObjs.Key)
   }
  }
 }
 return err
}
```

Nettoyez les ressources.

```
import (
 "context"
 "log"
 "s3_object_lock/actions"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// DemoBucket contains metadata for buckets used in this example.
type DemoBucket struct {
 name             string
 retentionEnabled bool
 objectKeys       []string
}

// Resources keeps track of AWS resources created during the ObjectLockScenario and
 handles
// cleanup when the scenario finishes.
type Resources struct {
 demoBuckets map[string]*DemoBucket

 s3Actions  *actions.S3Actions
```

```
 questioner demotools.IQuestioner
}

// init initializes objects in the Resources struct.
func (resources *Resources) init(s3Actions *actions.S3Actions, questioner
 demotools.IQuestioner) {
 resources.s3Actions = s3Actions
 resources.questioner = questioner
 resources.demoBuckets = map[string]*DemoBucket{}
}

// Cleanup deletes all AWS resources created during the ObjectLockScenario.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources " +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if !wantDelete {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
  return
 }

 log.Println("Removing objects from S3 buckets and deleting buckets...")
 resources.deleteBuckets(ctx)
 //resources.deleteRetentionObjects(resources.retentionBucket,
 resources.retentionObjects)

 log.Println("Cleanup complete.")
}

// deleteBuckets empties and then deletes all buckets created during the
 ObjectLockScenario.
func (resources *Resources) deleteBuckets(ctx context.Context) {
 for _, info := range createInfo {
  bucket := resources.demoBuckets[info.name]
  resources.deleteObjects(ctx, bucket)
```

```
  _, err := resources.s3Actions.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
   Bucket: aws.String(bucket.name),
  })
  if err != nil {
   panic(err)
  }
 }
 for _, info := range createInfo {
  bucket := resources.demoBuckets[info.name]
  err := s3.NewBucketNotExistsWaiter(resources.s3Actions.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket.name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucket.name)
  } else {
   log.Printf("Deleted %s.\n", bucket.name)
  }
 }
 resources.demoBuckets = map[string]*DemoBucket{}
}

// deleteObjects deletes all objects in the specified bucket.
func (resources *Resources) deleteObjects(ctx context.Context, bucket *DemoBucket) {
 lockConfig, err := resources.s3Actions.GetObjectLockConfiguration(ctx, bucket.name)
 if err != nil {
  panic(err)
 }
 versions, err := resources.s3Actions.ListObjectVersions(ctx, bucket.name)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("No objects to get from %s.\n", bucket.name)
  default:
   panic(err)
  }
 }
 delObjects := make([]types.ObjectIdentifier, len(versions))
 for i, version := range versions {
  if lockConfig != nil && lockConfig.ObjectLockEnabled ==
 types.ObjectLockEnabledEnabled {
   status, err := resources.s3Actions.GetObjectLegalHold(ctx, bucket.name,
 *version.Key, *version.VersionId)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
```

```
     log.Printf("Couldn't determine legal hold status for %s in %s.\n",
 *version.Key, bucket.name)
    default:
     panic(err)
    }
   } else if status != nil && *status == types.ObjectLockLegalHoldStatusOn {
    err = resources.s3Actions.PutObjectLegalHold(ctx, bucket.name, *version.Key,
 *version.VersionId, types.ObjectLockLegalHoldStatusOff)
    if err != nil {
     switch err.(type) {
     case *types.NoSuchKey:
      log.Printf("Couldn't turn off legal hold for %s in %s.\n", *version.Key,
 bucket.name)
     default:
      panic(err)
     }
    }
   }
  }
  delObjects[i] = types.ObjectIdentifier{Key: version.Key, VersionId:
 version.VersionId}
 }
 err = resources.s3Actions.DeleteObjects(ctx, bucket.name, delObjects,
 bucket.retentionEnabled)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Println("Nothing to delete.")
  default:
   panic(err)
  }
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - GetObjectLegalHold
  - GetObjectLockConfiguration
  - GetObjectRetention
  - PutObjectLegalHold

- PutObjectLockConfiguration
- PutObjectRetention

Charger ou télécharger des fichiers volumineux

L'exemple de code suivant montre comment charger ou télécharger des fichiers volumineux vers et depuis Amazon S3.

Pour plus d'informations, consultez la rubrique Uploading an object using multipart upload (Chargement d'un objet à l'aide du chargement partitionné).

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Créez des fonctions qui utilisent des gestionnaires de chargement et de téléchargement pour diviser les données en plusieurs parties et les transférer simultanément.

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
```

```
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// UploadLargeObject uses an upload manager to upload data to an object in a bucket.
// The upload manager breaks large data into parts and uploads the parts
 concurrently.
func (basics BucketBasics) UploadLargeObject(ctx context.Context, bucketName string,
 objectKey string, largeObject []byte) error {
 largeBuffer := bytes.NewReader(largeObject)
 var partMiBs int64 = 10
 uploader := manager.NewUploader(basics.S3Client, func(u *manager.Uploader) {
  u.PartSize = partMiBs * 1024 * 1024
 })
 _, err := uploader.Upload(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
  Body:   largeBuffer,
 })
 if err != nil {
  var apiErr smithy.APIError
  if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
   log.Printf("Error while uploading object to %s. The object is too large.\n"+
    "The maximum size for a multipart upload is 5TB.", bucketName)
  } else {
   log.Printf("Couldn't upload large object to %v:%v. Here's why: %v\n",
    bucketName, objectKey, err)
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }

 return err
}
```

```
// DownloadLargeObject uses a download manager to download an object from a bucket.
// The download manager gets the data in parts and writes them to a buffer until all
 of
// the data has been downloaded.
func (basics BucketBasics) DownloadLargeObject(ctx context.Context, bucketName
 string, objectKey string) ([]byte, error) {
 var partMiBs int64 = 10
 downloader := manager.NewDownloader(basics.S3Client, func(d *manager.Downloader) {
  d.PartSize = partMiBs * 1024 * 1024
 })
 buffer := manager.NewWriteAtBuffer([]byte{})
 _, err := downloader.Download(ctx, buffer, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  log.Printf("Couldn't download large object from %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return buffer.Bytes(), err
}
```

Exécutez un scénario interactif qui vous montre comment utiliser les gestionnaires de chargement et de téléchargement en contexte.

```
import (
 "context"
 "crypto/rand"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
)
```

```
// RunLargeObjectScenario is an interactive example that shows you how to use Amazon
// Simple Storage Service (Amazon S3) to upload and download large objects.
//
// 1. Create a bucket.
// 3. Upload a large object to the bucket by using an upload manager.
// 5. Download a large object by using a download manager.
// 8. Delete all objects in the bucket.
// 9. Delete the bucket.
//
// This example creates an Amazon S3 service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunLargeObjectScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon S3 large object demo.")
 log.Println(strings.Repeat("-", 88))

 s3Client := s3.NewFromConfig(sdkConfig)
 bucketBasics := actions.BucketBasics{S3Client: s3Client}

 bucketName := questioner.Ask("Let's create a bucket. Enter a name for your
 bucket:",
  demotools.NotEmpty{})
 bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
 if err != nil {
  panic(err)
 }
 if !bucketExists {
```

```
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

mibs := 30
log.Printf("Let's create a slice of %v MiB of random bytes and upload it to your
bucket. ", mibs)
questioner.Ask("Press Enter when you're ready.")
largeBytes := make([]byte, 1024*1024*mibs)
_, _ = rand.Read(largeBytes)
largeKey := "doc-example-large"
log.Println("Uploading...")
err = bucketBasics.UploadLargeObject(ctx, bucketName, largeKey, largeBytes)
if err != nil {
 panic(err)
}
log.Printf("Uploaded %v MiB object as %v", mibs, largeKey)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's download the %v MiB object.", mibs)
questioner.Ask("Press Enter when you're ready.")
log.Println("Downloading...")
largeDownload, err := bucketBasics.DownloadLargeObject(ctx, bucketName, largeKey)
if err != nil {
 panic(err)
}
log.Printf("Downloaded %v bytes.", len(largeDownload))
log.Println(strings.Repeat("-", 88))

if questioner.AskBool("Do you want to delete your bucket and all of its "+
 "contents? (y/n)", "y") {
 log.Println("Deleting object.")
 err = bucketBasics.DeleteObjects(ctx, bucketName, []string{largeKey})
 if err != nil {
  panic(err)
 }
 log.Println("Deleting bucket.")
 err = bucketBasics.DeleteBucket(ctx, bucketName)
 if err != nil {
```

```
   panic(err)
  }
 } else {
  log.Println("Okay. Don't forget to delete objects from your bucket to avoid
 charges.")
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Exemples sans serveur

Invoquer une fonction lambda à partir d'un déclencheur Amazon S3

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par le téléchargement d'un objet dans un compartiment S3. La fonction extrait le nom du compartiment S3 et la clé de l'objet à partir du paramètre d'événement et appelle l'API Amazon S3 pour récupérer et consigner le type de contenu de l'objet.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Utilisation d'un événement S3 avec Lambda en utilisant Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"
```

```
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

func handler(ctx context.Context, s3Event events.S3Event) error {
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Printf("failed to load default config: %s", err)
  return err
 }
 s3Client := s3.NewFromConfig(sdkConfig)

 for _, record := range s3Event.Records {
  bucket := record.S3.Bucket.Name
  key := record.S3.Object.URLDecodedKey
  headOutput, err := s3Client.HeadObject(ctx, &s3.HeadObjectInput{
   Bucket: &bucket,
   Key:    &key,
  })
  if err != nil {
   log.Printf("error getting head of object %s/%s: %s", bucket, key, err)
   return err
  }
  log.Printf("successfully retrieved %s/%s of type %s", bucket, key,
 *headOutput.ContentType)
 }

 return nil
}

func main() {
 lambda.Start(handler)
}
```

Exemples d'Amazon SNS utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon SNS.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Hello Amazon SNS

Les exemples de code suivants montrent comment démarrer avec Amazon SNS.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
```

```
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 snsClient := sns.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the topics for your account.")
 var topics []types.Topic
 paginator := sns.NewListTopicsPaginator(snsClient, &sns.ListTopicsInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get topics. Here's why: %v\n", err)
   break
  } else {
   topics = append(topics, output.Topics...)
  }
 }
 if len(topics) == 0 {
  fmt.Println("You don't have any topics!")
 } else {
  for _, topic := range topics {
   fmt.Printf("\t%v\n", *topic.TopicArn)
  }
 }
}
```

- Pour plus de détails sur l'API, reportez-vous ListTopicsà la section Référence des AWS SDK pour Go API.

Rubriques

- Actions
- Scénarios
- Exemples sans serveur

Actions

`CreateTopic`

L'exemple de code suivant montre comment utiliser`CreateTopic`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
```

```
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}
```

- Pour plus de détails sur l'API, reportez-vous CreateTopicà la section Référence des AWS SDK pour Go API.

`DeleteTopic`

L'exemple de code suivant montre comment utiliser`DeleteTopic`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteTopicà la section Référence des AWS SDK pour Go API.

`ListTopics`

L'exemple de code suivant montre comment utiliser`ListTopics`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 snsClient := sns.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the topics for your account.")
 var topics []types.Topic
 paginator := sns.NewListTopicsPaginator(snsClient, &sns.ListTopicsInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get topics. Here's why: %v\n", err)
   break
  } else {
   topics = append(topics, output.Topics...)
  }
 }
 if len(topics) == 0 {
  fmt.Println("You don't have any topics!")
 } else {
  for _, topic := range topics {
```

```
    fmt.Printf("\t%v\n", *topic.TopicArn)
   }
  }
}
```

- Pour plus de détails sur l'API, reportez-vous ListTopicsà la section Référence des AWS SDK pour Go API.

`Publish`

L'exemple de code suivant montre comment utiliser`Publish`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}
```

```
// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

- Pour de plus amples informations sur l'API, consultez Publier dans Référence de l'API AWS SDK pour Go .

`Subscribe`

L'exemple de code suivant montre comment utiliser`Subscribe`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Abonnez une file d'attente à une rubrique avec des filtres facultatifs.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
```

```
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}
```

- Pour de plus amples informations sur l'API, consultez S'abonner dans Référence de l'API AWS SDK pour Go .

Scénarios

Publier des messages dans des files d'attente

L'exemple de code suivant illustre comment :

- Créer une rubrique (FIFO ou non FIFO).
- Abonner plusieurs files d'attente à la rubrique avec la possibilité d'appliquer un filtre.
- Publier des messages dans la rubrique.
- Interroger les files d'attente pour les messages reçus.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"
 "strings"
 "topics_and_queues/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

const FIFO_SUFFIX = ".fifo"
const TONE_KEY = "tone"

var ToneChoices = []string{"cheerful", "funny", "serious", "sincere"}

// MessageBody is used to deserialize the body of a message from a JSON string.
type MessageBody struct {
 Message string
}

// ScenarioRunner separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ScenarioRunner struct {
 questioner demotools.IQuestioner
 snsActor   *actions.SnsActions
 sqsActor   *actions.SqsActions
```

```
}

func (runner ScenarioRunner) CreateTopic(ctx context.Context) (string, string, bool,
 bool) {
 log.Println("SNS topics can be configured as FIFO (First-In-First-Out) or standard.
\n" +
  "FIFO topics deliver messages in order and support deduplication and message
 filtering.")
 isFifoTopic := runner.questioner.AskBool("\nWould you like to work with FIFO
 topics? (y/n) ", "y")

 contentBasedDeduplication := false
 if isFifoTopic {
  log.Println(strings.Repeat("-", 88))
  log.Println("Because you have chosen a FIFO topic, deduplication is supported.\n"
 +
   "Deduplication IDs are either set in the message or are automatically generated
\n" +
   "from content using a hash function. If a message is successfully published to\n"
 +
   "an SNS FIFO topic, any message published and determined to have the same\n" +
   "deduplication ID, within the five-minute deduplication interval, is accepted\n"
 +
   "but not delivered. For more information about deduplication, see:\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.")
  contentBasedDeduplication = runner.questioner.AskBool(
   "\nDo you want to use content-based deduplication instead of entering a
 deduplication ID? (y/n) ", "y")
 }
 log.Println(strings.Repeat("-", 88))

 topicName := runner.questioner.Ask("Enter a name for your SNS topic. ")
 if isFifoTopic {
  topicName = fmt.Sprintf("%v%v", topicName, FIFO_SUFFIX)
  log.Printf("Because you have selected a FIFO topic, '%v' must be appended to\n"+
   "the topic name.", FIFO_SUFFIX)
 }

 topicArn, err := runner.snsActor.CreateTopic(ctx, topicName, isFifoTopic,
 contentBasedDeduplication)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new topic with the name '%v' and Amazon Resource Name (ARN) \n"+
```

```
  "'%v' has been created.", topicName, topicArn)

 return topicName, topicArn, isFifoTopic, contentBasedDeduplication
}

func (runner ScenarioRunner) CreateQueue(ctx context.Context, ordinal string,
 isFifoTopic bool) (string, string) {
 queueName := runner.questioner.Ask(fmt.Sprintf("Enter a name for the %v SQS queue.
 ", ordinal))
 if isFifoTopic {
  queueName = fmt.Sprintf("%v%v", queueName, FIFO_SUFFIX)
  if ordinal == "first" {
   log.Printf("Because you are creating a FIFO SQS queue, '%v' must "+
    "be appended to the queue name.\n", FIFO_SUFFIX)
  }
 }
 queueUrl, err := runner.sqsActor.CreateQueue(ctx, queueName, isFifoTopic)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new SQS queue with the name '%v' and the queue URL "+
  "'%v' has been created.", queueName, queueUrl)

 return queueName, queueUrl
}

func (runner ScenarioRunner) SubscribeQueueToTopic(
 ctx context.Context, queueName string, queueUrl string, topicName string, topicArn
 string, ordinal string,
 isFifoTopic bool) (string, bool) {

 queueArn, err := runner.sqsActor.GetQueueArn(ctx, queueUrl)
 if err != nil {
  panic(err)
 }
 log.Printf("The ARN of your queue is: %v.\n", queueArn)

 err = runner.sqsActor.AttachSendMessagePolicy(ctx, queueUrl, queueArn, topicArn)
 if err != nil {
  panic(err)
 }
 log.Println("Attached an IAM policy to the queue so the SNS topic can send " +
  "messages to it.")
 log.Println(strings.Repeat("-", 88))
```

```
var filterPolicy map[string][]string
if isFifoTopic {
 if ordinal == "first" {
  log.Println("Subscriptions to a FIFO topic can have filters.\n" +
   "If you add a filter to this subscription, then only the filtered messages\n" +
   "will be received in the queue.\n" +
   "For information about message filtering, see\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n" +
   "For this example, you can filter messages by a \"tone\" attribute.")
 }

 wantFiltering := runner.questioner.AskBool(
  fmt.Sprintf("Do you want to filter messages that are sent to \"%v\"\n"+
   "from the %v topic? (y/n) ", queueName, topicName), "y")
 if wantFiltering {
  log.Println("You can filter messages by one or more of the following \"tone\"
attributes.")

  var toneSelections []string
  askAboutTones := true
  for askAboutTones {
   toneIndex := runner.questioner.AskChoice(
    "Enter the number of the tone you want to filter by:\n", ToneChoices)
   toneSelections = append(toneSelections, ToneChoices[toneIndex])
   askAboutTones = runner.questioner.AskBool("Do you want to add another tone to
the filter? (y/n) ", "y")
  }
  log.Printf("Your subscription will be filtered to only pass the following tones:
%v\n", toneSelections)
  filterPolicy = map[string][]string{TONE_KEY: toneSelections}
 }
}

subscriptionArn, err := runner.snsActor.SubscribeQueue(ctx, topicArn, queueArn,
filterPolicy)
if err != nil {
 panic(err)
}
log.Printf("The queue %v is now subscribed to the topic %v with the subscription
ARN %v.\n",
 queueName, topicName, subscriptionArn)

return subscriptionArn, filterPolicy != nil
```

```
}

func (runner ScenarioRunner) PublishMessages(ctx context.Context, topicArn string,
 isFifoTopic bool, contentBasedDeduplication bool, usingFilters bool) {
 var message string
 var groupId string
 var dedupId string
 var toneSelection string
 publishMore := true
 for publishMore {
  groupId = ""
  dedupId = ""
  toneSelection = ""
  message = runner.questioner.Ask("Enter a message to publish: ")
  if isFifoTopic {
   log.Println("Because you are using a FIFO topic, you must set a message group ID.
\n" +
    "All messages within the same group will be received in the order they were
 published.")
   groupId = runner.questioner.Ask("Enter a message group ID: ")
   if !contentBasedDeduplication {
    log.Println("Because you are not using content-based deduplication,\n" +
     "you must enter a deduplication ID.")
    dedupId = runner.questioner.Ask("Enter a deduplication ID: ")
   }
  }
  if usingFilters {
   if runner.questioner.AskBool("Add a tone attribute so this message can be
 filtered? (y/n) ", "y") {
    toneIndex := runner.questioner.AskChoice(
     "Enter the number of the tone you want to filter by:\n", ToneChoices)
    toneSelection = ToneChoices[toneIndex]
   }
  }

  err := runner.snsActor.Publish(ctx, topicArn, message, groupId, dedupId, TONE_KEY,
 toneSelection)
  if err != nil {
   panic(err)
  }
  log.Println(("Your message was published."))

  publishMore = runner.questioner.AskBool("Do you want to publish another messsage?
 (y/n) ", "y")
```

```
 }
}

func (runner ScenarioRunner) PollForMessages(ctx context.Context, queueUrls
 []string) {
 log.Println("Polling queues for messages...")
 for _, queueUrl := range queueUrls {
  var messages []types.Message
  for {
   currentMsgs, err := runner.sqsActor.GetMessages(ctx, queueUrl, 10, 1)
   if err != nil {
    panic(err)
   }
   if len(currentMsgs) == 0 {
    break
   }
   messages = append(messages, currentMsgs...)
  }
  if len(messages) == 0 {
   log.Printf("No messages were received by queue %v.\n", queueUrl)
  } else if len(messages) == 1 {
   log.Printf("One message was received by queue %v:\n", queueUrl)

  } else {
   log.Printf("%v messages were received by queue %v:\n", len(messages), queueUrl)
  }
  for msgIndex, message := range messages {
   messageBody := MessageBody{}
   err := json.Unmarshal([]byte(*message.Body), &messageBody)
   if err != nil {
    panic(err)
   }
   log.Printf("Message %v: %v\n", msgIndex+1, messageBody.Message)
  }

  if len(messages) > 0 {
   log.Printf("Deleting %v messages from queue %v.\n", len(messages), queueUrl)
   err := runner.sqsActor.DeleteMessages(ctx, queueUrl, messages)
   if err != nil {
    panic(err)
   }
  }
 }
}
```

```
// RunTopicsAndQueuesScenario is an interactive example that shows you how to use
 the
// AWS SDK for Go to create and use Amazon SNS topics and Amazon SQS queues.
//
// 1. Create a topic (FIFO or non-FIFO).
// 2. Subscribe several queues to the topic with an option to apply a filter.
// 3. Publish messages to the topic.
// 4. Poll the queues for messages received.
// 5. Delete the topic and the queues.
//
// This example creates service clients from the specified sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunTopicsAndQueuesScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner) {
 resources := Resources{}
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.\n" +
    "Cleaning up any resources that were created...")
   resources.Cleanup(ctx)
  }
 }()
 queueCount := 2

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome to messaging with topics and queues.\n\n"+
  "In this scenario, you will create an SNS topic and subscribe %v SQS queues to the
\n"+
  "topic. You can select from several options for configuring the topic and the\n"+
  "subscriptions for the queues. You can then post to the topic and see the results
\n"+
  "in the queues.\n", queueCount)

 log.Println(strings.Repeat("-", 88))

 runner := ScenarioRunner{
  questioner: questioner,
  snsActor:   &actions.SnsActions{SnsClient: sns.NewFromConfig(sdkConfig)},
  sqsActor:   &actions.SqsActions{SqsClient: sqs.NewFromConfig(sdkConfig)},
```

```
 }
 resources.snsActor = runner.snsActor
 resources.sqsActor = runner.sqsActor

 topicName, topicArn, isFifoTopic, contentBasedDeduplication :=
 runner.CreateTopic(ctx)
 resources.topicArn = topicArn
 log.Println(strings.Repeat("-", 88))

 log.Printf("Now you will create %v SQS queues and subscribe them to the topic.\n",
 queueCount)
 ordinals := []string{"first", "next"}
 usingFilters := false
 for _, ordinal := range ordinals {
  queueName, queueUrl := runner.CreateQueue(ctx, ordinal, isFifoTopic)
  resources.queueUrls = append(resources.queueUrls, queueUrl)

  _, filtering := runner.SubscribeQueueToTopic(ctx, queueName, queueUrl, topicName,
 topicArn, ordinal, isFifoTopic)
  usingFilters = usingFilters || filtering
 }

 log.Println(strings.Repeat("-", 88))
 runner.PublishMessages(ctx, topicArn, isFifoTopic, contentBasedDeduplication,
 usingFilters)
 log.Println(strings.Repeat("-", 88))
 runner.PollForMessages(ctx, resources.queueUrls)

 log.Println(strings.Repeat("-", 88))

 wantCleanup := questioner.AskBool("Do you want to remove all AWS resources created
 for this scenario? (y/n) ", "y")
 if wantCleanup {
  log.Println("Cleaning up resources...")
  resources.Cleanup(ctx)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure qui englobe les actions Amazon SNS utilisées dans cet exemple.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
```

```
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
```

```
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}



// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

Définissez une structure qui englobe les actions Amazon SQS utilisées dans cet exemple.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }
```

```
 return queueUrl, err
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
```

```
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
```

```
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
```

```
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

Nettoyez les ressources.

```
import (
 "context"
 "fmt"
 "log"
 "topics_and_queues/actions"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 topicArn  string
 queueUrls []string
 snsActor  *actions.SnsActions
 sqsActor  *actions.SqsActions
}

// Cleanup deletes all AWS resources created during an example.
func (resources Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Println("Something went wrong during cleanup. Use the AWS Management Console
\n" +
    "to remove any remaining resources that were created for this scenario.")
  }
 }()

 var err error
 if resources.topicArn != "" {
  log.Printf("Deleting topic %v.\n", resources.topicArn)
  err = resources.snsActor.DeleteTopic(ctx, resources.topicArn)
  if err != nil {
```

```
   panic(err)
  }
 }

 for _, queueUrl := range resources.queueUrls {
  log.Printf("Deleting queue %v.\n", queueUrl)
  err = resources.sqsActor.DeleteQueue(ctx, queueUrl)
  if err != nil {
   panic(err)
  }
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

Exemples sans serveur

Invocation d'une fonction lambda à partir d'un déclencheur Amazon SNS

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception de messages provenant d'une rubrique SNS. La fonction extrait les messages du paramètre d’événement et consigne le contenu de chaque message.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement SNS avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, snsEvent events.SNSEvent) {
 for _, record := range snsEvent.Records {
  processMessage(record)
 }
 fmt.Println("done")
}

func processMessage(record events.SNSEventRecord) {
 message := record.SNS.Message
 fmt.Printf("Processed message: %s\n", message)
 // TODO: Process your record here
}

func main() {
 lambda.Start(handler)
}
```

Exemples d'Amazon SQS utilisant le SDK pour Go V2

Les exemples de code suivants vous montrent comment effectuer des actions et implémenter des scénarios courants à l'aide de la AWS SDK pour Go V2 avec Amazon SQS.

Les actions sont des extraits de code de programmes plus larges et doivent être exécutées dans leur contexte. Alors que les actions vous indiquent comment appeler des fonctions de service individuelles, vous pouvez les voir en contexte dans leurs scénarios associés.

Les Scénarios sont des exemples de code qui vous montrent comment accomplir des tâches spécifiques en appelant plusieurs fonctions au sein d'un même service ou combinés à d'autres Services AWS.

Chaque exemple inclut un lien vers le code source complet, où vous trouverez des instructions sur la façon de configurer et d'exécuter le code en contexte.

Mise en route

Bonjour Amazon SQS

Les exemples de code suivants montrent comment commencer à utiliser Amazon SQS.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
```

```
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Queue Service
// (Amazon SQS) client and list the queues in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 sqsClient := sqs.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the queues for your account.")
 var queueUrls []string
 paginator := sqs.NewListQueuesPaginator(sqsClient, &sqs.ListQueuesInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get queues. Here's why: %v\n", err)
   break
  } else {
   queueUrls = append(queueUrls, output.QueueUrls...)
  }
 }
 if len(queueUrls) == 0 {
  fmt.Println("You don't have any queues!")
 } else {
  for _, queueUrl := range queueUrls {
   fmt.Printf("\t%v\n", queueUrl)
  }
 }
}
```

- Pour plus de détails sur l'API, reportez-vous ListQueuesà la section Référence des AWS SDK pour Go API.

Rubriques

- Actions
- Scénarios
- Exemples sans serveur

Actions

`CreateQueue`

L'exemple de code suivant montre comment utiliser`CreateQueue`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
```

```
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }

 return queueUrl, err
}
```

- Pour plus de détails sur l'API, reportez-vous CreateQueueà la section Référence des AWS SDK pour Go API.

`DeleteMessageBatch`

L'exemple de code suivant montre comment utiliser`DeleteMessageBatch`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteMessageBatchà la section Référence des AWS SDK pour Go API.

`DeleteQueue`

L'exemple de code suivant montre comment utiliser`DeleteQueue`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

- Pour plus de détails sur l'API, reportez-vous DeleteQueueà la section Référence des AWS SDK pour Go API.

`GetQueueAttributes`

L'exemple de code suivant montre comment utiliser`GetQueueAttributes`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
```

```
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}
```

- Pour plus de détails sur l'API, reportez-vous GetQueueAttributesà la section Référence des AWS SDK pour Go API.

`ListQueues`

L'exemple de code suivant montre comment utiliser`ListQueues`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
package main

import (
 "context"
 "fmt"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Queue Service
// (Amazon SQS) client and list the queues in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 sqsClient := sqs.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the queues for your account.")
 var queueUrls []string
 paginator := sqs.NewListQueuesPaginator(sqsClient, &sqs.ListQueuesInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get queues. Here's why: %v\n", err)
   break
  } else {
   queueUrls = append(queueUrls, output.QueueUrls...)
  }
 }
 if len(queueUrls) == 0 {
  fmt.Println("You don't have any queues!")
 } else {
  for _, queueUrl := range queueUrls {
   fmt.Printf("\t%v\n", queueUrl)
  }
 }
}
```

- Pour plus de détails sur l'API, reportez-vous ListQueuesà la section Référence des AWS SDK pour Go API.

`ReceiveMessage`

L'exemple de code suivant montre comment utiliser`ReceiveMessage`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
```

```
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}
```

- Pour plus de détails sur l'API, reportez-vous ReceiveMessageà la section Référence des AWS SDK pour Go API.

`SetQueueAttributes`

L'exemple de code suivant montre comment utiliser`SetQueueAttributes`.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
```

```
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
```

```
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string
```

- Pour plus de détails sur l'API, reportez-vous SetQueueAttributesà la section Référence des AWS SDK pour Go API.

Scénarios

Publier des messages dans des files d'attente

L'exemple de code suivant illustre comment :

- Créer une rubrique (FIFO ou non FIFO).
- Abonner plusieurs files d'attente à la rubrique avec la possibilité d'appliquer un filtre.
- Publier des messages dans la rubrique.
- Interroger les files d'attente pour les messages reçus.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples de code AWS.

Exécutez un scénario interactif à une invite de commande.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"
 "strings"
 "topics_and_queues/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

const FIFO_SUFFIX = ".fifo"
const TONE_KEY = "tone"

var ToneChoices = []string{"cheerful", "funny", "serious", "sincere"}

// MessageBody is used to deserialize the body of a message from a JSON string.
type MessageBody struct {
 Message string
}

// ScenarioRunner separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ScenarioRunner struct {
 questioner demotools.IQuestioner
 snsActor   *actions.SnsActions
 sqsActor   *actions.SqsActions
```

```
}

func (runner ScenarioRunner) CreateTopic(ctx context.Context) (string, string, bool,
 bool) {
 log.Println("SNS topics can be configured as FIFO (First-In-First-Out) or standard.
\n" +
  "FIFO topics deliver messages in order and support deduplication and message
 filtering.")
 isFifoTopic := runner.questioner.AskBool("\nWould you like to work with FIFO
 topics? (y/n) ", "y")

 contentBasedDeduplication := false
 if isFifoTopic {
  log.Println(strings.Repeat("-", 88))
  log.Println("Because you have chosen a FIFO topic, deduplication is supported.\n"
 +
   "Deduplication IDs are either set in the message or are automatically generated
\n" +
   "from content using a hash function. If a message is successfully published to\n"
 +
   "an SNS FIFO topic, any message published and determined to have the same\n" +
   "deduplication ID, within the five-minute deduplication interval, is accepted\n"
 +
   "but not delivered. For more information about deduplication, see:\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.")
  contentBasedDeduplication = runner.questioner.AskBool(
   "\nDo you want to use content-based deduplication instead of entering a
 deduplication ID? (y/n) ", "y")
 }
 log.Println(strings.Repeat("-", 88))

 topicName := runner.questioner.Ask("Enter a name for your SNS topic. ")
 if isFifoTopic {
  topicName = fmt.Sprintf("%v%v", topicName, FIFO_SUFFIX)
  log.Printf("Because you have selected a FIFO topic, '%v' must be appended to\n"+
   "the topic name.", FIFO_SUFFIX)
 }

 topicArn, err := runner.snsActor.CreateTopic(ctx, topicName, isFifoTopic,
 contentBasedDeduplication)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new topic with the name '%v' and Amazon Resource Name (ARN) \n"+
```

```
  "'%v' has been created.", topicName, topicArn)

 return topicName, topicArn, isFifoTopic, contentBasedDeduplication
}

func (runner ScenarioRunner) CreateQueue(ctx context.Context, ordinal string,
 isFifoTopic bool) (string, string) {
 queueName := runner.questioner.Ask(fmt.Sprintf("Enter a name for the %v SQS queue.
 ", ordinal))
 if isFifoTopic {
  queueName = fmt.Sprintf("%v%v", queueName, FIFO_SUFFIX)
  if ordinal == "first" {
   log.Printf("Because you are creating a FIFO SQS queue, '%v' must "+
    "be appended to the queue name.\n", FIFO_SUFFIX)
  }
 }
 queueUrl, err := runner.sqsActor.CreateQueue(ctx, queueName, isFifoTopic)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new SQS queue with the name '%v' and the queue URL "+
  "'%v' has been created.", queueName, queueUrl)

 return queueName, queueUrl
}

func (runner ScenarioRunner) SubscribeQueueToTopic(
 ctx context.Context, queueName string, queueUrl string, topicName string, topicArn
 string, ordinal string,
 isFifoTopic bool) (string, bool) {

 queueArn, err := runner.sqsActor.GetQueueArn(ctx, queueUrl)
 if err != nil {
  panic(err)
 }
 log.Printf("The ARN of your queue is: %v.\n", queueArn)

 err = runner.sqsActor.AttachSendMessagePolicy(ctx, queueUrl, queueArn, topicArn)
 if err != nil {
  panic(err)
 }
 log.Println("Attached an IAM policy to the queue so the SNS topic can send " +
  "messages to it.")
 log.Println(strings.Repeat("-", 88))
```

```
var filterPolicy map[string][]string
if isFifoTopic {
 if ordinal == "first" {
  log.Println("Subscriptions to a FIFO topic can have filters.\n" +
   "If you add a filter to this subscription, then only the filtered messages\n" +
   "will be received in the queue.\n" +
   "For information about message filtering, see\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n" +
   "For this example, you can filter messages by a \"tone\" attribute.")
 }

 wantFiltering := runner.questioner.AskBool(
  fmt.Sprintf("Do you want to filter messages that are sent to \"%v\"\n"+
   "from the %v topic? (y/n) ", queueName, topicName), "y")
 if wantFiltering {
  log.Println("You can filter messages by one or more of the following \"tone\"
attributes.")

  var toneSelections []string
  askAboutTones := true
  for askAboutTones {
   toneIndex := runner.questioner.AskChoice(
    "Enter the number of the tone you want to filter by:\n", ToneChoices)
   toneSelections = append(toneSelections, ToneChoices[toneIndex])
   askAboutTones = runner.questioner.AskBool("Do you want to add another tone to
the filter? (y/n) ", "y")
  }
  log.Printf("Your subscription will be filtered to only pass the following tones:
%v\n", toneSelections)
  filterPolicy = map[string][]string{TONE_KEY: toneSelections}
 }
}

subscriptionArn, err := runner.snsActor.SubscribeQueue(ctx, topicArn, queueArn,
filterPolicy)
if err != nil {
 panic(err)
}
log.Printf("The queue %v is now subscribed to the topic %v with the subscription
ARN %v.\n",
 queueName, topicName, subscriptionArn)

return subscriptionArn, filterPolicy != nil
```

```
}

func (runner ScenarioRunner) PublishMessages(ctx context.Context, topicArn string,
 isFifoTopic bool, contentBasedDeduplication bool, usingFilters bool) {
 var message string
 var groupId string
 var dedupId string
 var toneSelection string
 publishMore := true
 for publishMore {
  groupId = ""
  dedupId = ""
  toneSelection = ""
  message = runner.questioner.Ask("Enter a message to publish: ")
  if isFifoTopic {
   log.Println("Because you are using a FIFO topic, you must set a message group ID.
\n" +
    "All messages within the same group will be received in the order they were
 published.")
   groupId = runner.questioner.Ask("Enter a message group ID: ")
   if !contentBasedDeduplication {
    log.Println("Because you are not using content-based deduplication,\n" +
     "you must enter a deduplication ID.")
    dedupId = runner.questioner.Ask("Enter a deduplication ID: ")
   }
  }
  if usingFilters {
   if runner.questioner.AskBool("Add a tone attribute so this message can be
 filtered? (y/n) ", "y") {
    toneIndex := runner.questioner.AskChoice(
     "Enter the number of the tone you want to filter by:\n", ToneChoices)
    toneSelection = ToneChoices[toneIndex]
   }
  }

  err := runner.snsActor.Publish(ctx, topicArn, message, groupId, dedupId, TONE_KEY,
 toneSelection)
  if err != nil {
   panic(err)
  }
  log.Println(("Your message was published."))

  publishMore = runner.questioner.AskBool("Do you want to publish another messsage?
 (y/n) ", "y")
```

```
 }
}

func (runner ScenarioRunner) PollForMessages(ctx context.Context, queueUrls
 []string) {
 log.Println("Polling queues for messages...")
 for _, queueUrl := range queueUrls {
  var messages []types.Message
  for {
   currentMsgs, err := runner.sqsActor.GetMessages(ctx, queueUrl, 10, 1)
   if err != nil {
    panic(err)
   }
   if len(currentMsgs) == 0 {
    break
   }
   messages = append(messages, currentMsgs...)
  }
  if len(messages) == 0 {
   log.Printf("No messages were received by queue %v.\n", queueUrl)
  } else if len(messages) == 1 {
   log.Printf("One message was received by queue %v:\n", queueUrl)

  } else {
   log.Printf("%v messages were received by queue %v:\n", len(messages), queueUrl)
  }
  for msgIndex, message := range messages {
   messageBody := MessageBody{}
   err := json.Unmarshal([]byte(*message.Body), &messageBody)
   if err != nil {
    panic(err)
   }
   log.Printf("Message %v: %v\n", msgIndex+1, messageBody.Message)
  }

  if len(messages) > 0 {
   log.Printf("Deleting %v messages from queue %v.\n", len(messages), queueUrl)
   err := runner.sqsActor.DeleteMessages(ctx, queueUrl, messages)
   if err != nil {
    panic(err)
   }
  }
 }
}
```

```
// RunTopicsAndQueuesScenario is an interactive example that shows you how to use
 the
// AWS SDK for Go to create and use Amazon SNS topics and Amazon SQS queues.
//
// 1. Create a topic (FIFO or non-FIFO).
// 2. Subscribe several queues to the topic with an option to apply a filter.
// 3. Publish messages to the topic.
// 4. Poll the queues for messages received.
// 5. Delete the topic and the queues.
//
// This example creates service clients from the specified sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunTopicsAndQueuesScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner) {
 resources := Resources{}
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.\n" +
    "Cleaning up any resources that were created...")
   resources.Cleanup(ctx)
  }
 }()
 queueCount := 2

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome to messaging with topics and queues.\n\n"+
  "In this scenario, you will create an SNS topic and subscribe %v SQS queues to the
\n"+
  "topic. You can select from several options for configuring the topic and the\n"+
  "subscriptions for the queues. You can then post to the topic and see the results
\n"+
  "in the queues.\n", queueCount)

 log.Println(strings.Repeat("-", 88))

 runner := ScenarioRunner{
  questioner: questioner,
  snsActor:   &actions.SnsActions{SnsClient: sns.NewFromConfig(sdkConfig)},
  sqsActor:   &actions.SqsActions{SqsClient: sqs.NewFromConfig(sdkConfig)},
```

```
 }
 resources.snsActor = runner.snsActor
 resources.sqsActor = runner.sqsActor

 topicName, topicArn, isFifoTopic, contentBasedDeduplication :=
 runner.CreateTopic(ctx)
 resources.topicArn = topicArn
 log.Println(strings.Repeat("-", 88))

 log.Printf("Now you will create %v SQS queues and subscribe them to the topic.\n",
 queueCount)
 ordinals := []string{"first", "next"}
 usingFilters := false
 for _, ordinal := range ordinals {
  queueName, queueUrl := runner.CreateQueue(ctx, ordinal, isFifoTopic)
  resources.queueUrls = append(resources.queueUrls, queueUrl)

  _, filtering := runner.SubscribeQueueToTopic(ctx, queueName, queueUrl, topicName,
 topicArn, ordinal, isFifoTopic)
  usingFilters = usingFilters || filtering
 }

 log.Println(strings.Repeat("-", 88))
 runner.PublishMessages(ctx, topicArn, isFifoTopic, contentBasedDeduplication,
 usingFilters)
 log.Println(strings.Repeat("-", 88))
 runner.PollForMessages(ctx, resources.queueUrls)

 log.Println(strings.Repeat("-", 88))

 wantCleanup := questioner.AskBool("Do you want to remove all AWS resources created
 for this scenario? (y/n) ", "y")
 if wantCleanup {
  log.Println("Cleaning up resources...")
  resources.Cleanup(ctx)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Définissez une structure qui englobe les actions Amazon SNS utilisées dans cet exemple.

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
```

```
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
```

```
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}



// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

Définissez une structure qui englobe les actions Amazon SQS utilisées dans cet exemple.

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }
```

```
 return queueUrl, err
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
```

```
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
```

```
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
```

```
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

Nettoyez les ressources.

```
import (
 "context"
 "fmt"
 "log"
 "topics_and_queues/actions"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 topicArn  string
 queueUrls []string
 snsActor  *actions.SnsActions
 sqsActor  *actions.SqsActions
}

// Cleanup deletes all AWS resources created during an example.
func (resources Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Println("Something went wrong during cleanup. Use the AWS Management Console
\n" +
    "to remove any remaining resources that were created for this scenario.")
  }
 }()

 var err error
 if resources.topicArn != "" {
  log.Printf("Deleting topic %v.\n", resources.topicArn)
  err = resources.snsActor.DeleteTopic(ctx, resources.topicArn)
  if err != nil {
```

```
   panic(err)
  }
 }

 for _, queueUrl := range resources.queueUrls {
  log.Printf("Deleting queue %v.\n", queueUrl)
  err = resources.sqsActor.DeleteQueue(ctx, queueUrl)
  if err != nil {
   panic(err)
  }
 }
}
```

- Pour plus d'informations sur l'API consultez les rubriques suivantes dans la référence de l'API AWS SDK pour Go .
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

Exemples sans serveur

Invoquer une fonction Lambda à partir d’un déclencheur Amazon SQS

L'exemple de code suivant montre comment implémenter une fonction Lambda qui reçoit un événement déclenché par la réception de messages provenant d'une file d'attente SQS. La fonction extrait les messages du paramètre d’événement et consigne le contenu de chaque message.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Consommation d'un événement SQS avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package integration_sqs_to_lambda

import (
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.SQSEvent) error {
 for _, record := range event.Records {
  err := processMessage(record)
  if err != nil {
   return err
  }
 }
 fmt.Println("done")
 return nil
}

func processMessage(record events.SQSMessage) error {
 fmt.Printf("Processed message %s\n", record.Body)
 // TODO: Do interesting work based on the new message
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Signalement des échecs d'articles par lots pour les fonctions Lambda à l'aide d'un déclencheur Amazon SQS

L'exemple de code suivant montre comment implémenter une réponse par lots partielle pour les fonctions Lambda qui reçoivent des événements d'une file d'attente SQS. La fonction signale les défaillances échecs d'articles par lots dans la réponse, en indiquant à Lambda de réessayer ces messages ultérieurement.

Kit SDK for Go V2

> **Note**
>
> Il y en a plus à ce sujet GitHub. Trouvez l'exemple complet et découvrez comment le configurer et l'exécuter dans le référentiel d'exemples sans serveur.

Signalement des échecs d'articles par lots SQS avec Lambda à l'aide de Go.

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, sqsEvent events.SQSEvent) (map[string]interface{},
 error) {
 batchItemFailures := []map[string]interface{}{}

 for _, message := range sqsEvent.Records {

  if /* Your message processing condition here */ {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": message.MessageId})
  }
 }
```

```
 sqsBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
 return sqsBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

Migrer vers la AWS SDK pour Go v2

Version minimale de Go

AWS SDK pour Go Nécessite une version Go minimale de 1.20. La dernière version de Go peut être téléchargée sur la page des téléchargements. Consultez l'historique des versions pour plus d'informations sur chaque version de Go et les informations pertinentes requises pour la mise à niveau.

Modularisation

AWS SDK pour Go Il a été mis à jour pour tirer parti des modules Go qui sont devenus le mode de développement par défaut dans Go 1.13. Un certain nombre de packages fournis par le SDK ont été modularisés et sont respectivement versionnés et publiés indépendamment. Cette modification permet d'améliorer la modélisation des dépendances des applications et permet au SDK de fournir de nouvelles fonctionnalités conformes à la stratégie de gestion des versions du module Go.

La liste suivante répertorie certains modules Go fournis par le SDK :

Module	Description
`github.com/aws/aws-sdk-go-v2`	Le noyau du SDK
`github.com/aws/aws-sdk-go-v2/config`	Chargement de la configuration partagée
`github.com/aws/aws-sdk-go-v2/credentials`	AWS Fournisseurs d'informations d'identification
`github.com/aws/aws-sdk-go-v2/feature/ec2/imds`	Client du service de métadonnées d' EC2 instance Amazon

Les clients de service et les modules utilitaires de niveau supérieur du SDK sont imbriqués sous les chemins d'importation suivants :

Importer la racine	Description
`github.com/aws/aws-sdk-go-v2/service/`	Modules clients de service
`github.com/aws/aws-sdk-go-v2/feature/`	Utilitaires de haut niveau pour des services tels que Amazon S3 Transfer Manager

Chargement de la configuration

Le package de session et les fonctionnalités associées sont remplacés par un système de configuration simplifié fourni par le package de configuration. Le `config` package est un module Go distinct et peut être inclus dans les dépendances de votre application avec`go get`.

```
go get github.com/aws/aws-sdk-go-v2/config
```

La session. Nouveau, session.NewSessionNewSessionWithOptions, et Session.must doivent être migrés vers la configuration. LoadDefaultConfig.

Le `config` package fournit plusieurs fonctions d'assistance qui aident à remplacer le chargement de la configuration partagée par programmation. Le préfixe de ces noms de fonctions est `With` suivi d'une option qu'elles remplacent. Examinons quelques exemples de la façon de migrer l'utilisation du `session` package.

Pour plus d'informations sur le chargement de la configuration partagée, consultezConfiguration du kit SDK.

Exemples

Migration de NewSession LoadDefaultConfig

L'exemple suivant montre comment l'utilisation de paramètres `session.NewSession` sans argument supplémentaire est migrée vers. `config.LoadDefaultConfig`

```
// V1 using NewSession

import "github.com/aws/aws-sdk-go/aws/session"
```

```
// ...

sess, err := session.NewSession()
if err != nil {
    // handle error
}
```

```
// V2 using LoadDefaultConfig

import "context"
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}
```

Migration depuis les options NewSession AWS.config

L'exemple montre comment migrer le remplacement de `aws.Config` valeurs lors du chargement de la configuration. Une ou plusieurs fonctions `config.With*` d'assistance peuvent être fournies `config.LoadDefaultConfig` pour remplacer les valeurs de configuration chargées. Dans cet exemple, la AWS région est remplacée par `us-west-2` l'utilisation de la configuration. WithRegionfonction d'assistance.

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"

// ...

sess, err := session.NewSession(aws.Config{
    Region: aws.String("us-west-2")
})
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithRegion("us-west-2"),
)
if err != nil {
    // handle error
}
```

Migration depuis NewSessionWithOptions

Cet exemple montre comment migrer les valeurs de remplacement lors du chargement de la configuration. Aucune ou plusieurs fonctions `config.With*` d'assistance peuvent être fournies `config.LoadDefaultConfig` pour remplacer les valeurs de configuration chargées. Dans cet exemple, nous montrons comment remplacer le profil cible utilisé lors du chargement de la configuration partagée du AWS SDK.

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"

// ...

sess, err := session.NewSessionWithOptions(aws.Config{
    Profile: "my-application-profile"
})
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"
```

```
// ...

cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedConfigProfile("my-application-profile"),
)
if err != nil {
    // handle error
}
```

Se moquer et `*iface`

Les `*iface` packages et interfaces qu'ils contiennent (par exemple S3iface.S3API) ont été supprimés. Ces définitions d'interface ne sont pas stables car elles sont interrompues chaque fois qu'un service ajoute une nouvelle opération.

L'utilisation de `*iface` doit être remplacée par des interfaces définies par l'appelant pour les opérations de service utilisées :

```
// V1

import "io"

import "github.com/aws/aws-sdk-go/service/s3"
import "github.com/aws/aws-sdk-go/service/s3/s3iface"

func GetObjectBytes(client s3iface.S3API, bucket, key string) ([]byte, error) {
    object, err := client.GetObject(&s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return io.ReadAll(object.Body)
}
```

```
// V2

import "context"
```

```
import "io"

import "github.com/aws/aws-sdk-go-v2/service/s3"

type GetObjectAPIClient interface {
    GetObject(context.Context, *s3.GetObjectInput, ...func(*s3.Options))
 (*s3.GetObjectOutput, error)
}

func GetObjectBytes(ctx context.Context, client GetObjectAPIClient, bucket, key string)
 ([]byte, error) {
    object, err := client.GetObject(ctx, &s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return io.ReadAll(object.Body)
}
```

Consultez la Tests unitaires avec la AWS SDK pour Go v2 pour plus d'informations.

Accréditations et fournisseurs d'accréditations

Le package aws/credentials et les fournisseurs d'informations d'identification associés ont été déplacés vers l'emplacement du package d'informations d'identification. Le `credentials` package est un module Go que vous pouvez récupérer en utilisantgo `get`.

```
go get github.com/aws/aws-sdk-go-v2/credentials
```

La version AWS SDK pour Go v2 met à jour les fournisseurs AWS d'informations d'identification afin de fournir une interface cohérente pour récupérer AWS les informations d'identification. Chaque fournisseur implémente les aws. CredentialsProviderinterface, qui définit une `Retrieve` méthode renvoyant un`(aws.Credentials, error)`. AWS.Credentials analogue au type Credentials.Value AWS SDK pour Go v1.

Vous devez emballer `aws.CredentialsProvider` les objets avec aws. CredentialsCachepour permettre la mise en cache des informations d'identification. Vous l'utilisez

NewCredentialsCachepour construire un `aws.CredentialsCache` objet. Par défaut, les informations d'identification configurées par `config.LoadDefaultConfig` sont encapsulées dans`aws.CredentialsCache`.

Le tableau suivant répertorie les changements d'emplacement des fournisseurs AWS d'informations d'identification de AWS SDK pour Go v1 à v2.

Nom	Importation V1	Importation V2
Informations d'identification du rôle Amazon EC2 IAM	`github.com/aws/aws-sdk-go/aws/credentials/ec2rolecreds`	`github.com/aws/aws-sdk-go-v2/credentials/ec2rolecreds`
Informations d'identification du terminal	`github.com/aws/aws-sdk-go/aws/credentials/endpointcreds`	`github.com/aws/aws-sdk-go-v2/credentials/endpointcreds`
Informations d'identification du processus	`github.com/aws/aws-sdk-go/aws/credentials/processcreds`	`github.com/aws/aws-sdk-go-v2/credentials/processcreds`
AWS Security Token Service	`github.com/aws/aws-sdk-go/aws/credentials/stscreds`	`github.com/aws/aws-sdk-go-v2/credentials/stscreds`

Informations d'identification statiques

Applications utilisant des informations d'identification. NewStaticCredentialspour construire des informations d'identification statiques par programmation, vous devez utiliser des informations d'identification. NewStaticCredentialsProvider.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials"

// ...
```

```
appCreds := credentials.NewStaticCredentials(accessKey, secretKey, sessionToken)
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials"

// ...

appCreds := aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey,
 secretKey, sessionToken))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

Informations d'identification du rôle Amazon EC2 IAM

Vous devez migrer l'utilisation de NewCredentialsset NewCredentialsWithClientpour utiliser New.

Le `ec2rolecreds` package utilise les options `ec2rolecreds.New` fonctionnelles d'EC2RoleCreds.options en entrée, ce qui vous permet de remplacer le client Amazon EC2 Instance Metadata Service spécifique à utiliser ou de modifier le délai d'expiration des informations d'identification.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/ec2rolecreds"

// ...

appCreds := ec2rolecreds.NewCredentials(sess)
value, err := appCreds.Get()
```

```
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/ec2rolecreds"

// ...

// New returns an object of a type that satisfies the aws.CredentialProvider interface
appCreds := aws.NewCredentialsCache(ec2rolecreds.New())
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

Informations d'identification du terminal

Vous devez migrer l'utilisation de NewCredentialsClientet NewProviderClientpour utiliser New.

La New fonction `endpointcreds` du package utilise un argument de chaîne contenant l'URL d'un point de terminaison HTTP ou HTTPS à partir duquel récupérer les informations d'identification, et les options fonctionnelles de EndpointCreds.options pour modifier le fournisseur d'informations d'identification et remplacer des paramètres de configuration spécifiques.

Informations d'identification du processus

Vous devez migrer l'utilisation de NewCredentialsNewCredentialsCommand, et NewCredentialsTimeoutpour utiliser NewProviderou NewProviderCommand.

La `NewProvider` fonction `processcreds` du package prend un argument de chaîne correspondant à la commande à exécuter dans le shell de l'environnement hôte et les options fonctionnelles des options pour modifier le fournisseur d'informations d'identification et remplacer des paramètres de configuration spécifiques.

`NewProviderCommand`utilise une implémentation de l'NewCommandBuilderinterface qui définit des commandes de processus plus complexes qui peuvent prendre un ou plusieurs arguments

de ligne de commande, ou avoir certaines exigences en matière d'environnement d'exécution. DefaultNewCommandBuilderimplémente cette interface et définit un générateur de commandes pour un processus qui nécessite plusieurs arguments de ligne de commande.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/processcreds"

// ...

appCreds := processcreds.NewCredentials("/path/to/command")
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/processcreds"

// ...

appCreds := aws.NewCredentialsCache(processcreds.NewProvider("/path/to/command"))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

AWS Security Token Service Informations d'identification

AssumeRole

Vous devez migrer l'utilisation de NewCredentials, et NewCredentialsWithClientpour utiliser NewAssumeRoleProvider.

La `NewAssumeRoleProvider` fonction `stscreds` du package doit être appelée avec un STS.client, et l' AWS Identity and Access Management ARN du rôle doit être assumé à partir des informations

d'identification configurées fourniessts.Client. Vous pouvez également fournir un ensemble d'options fonctionnelles ou AssumeRoleOptionspour modifier d'autres paramètres facultatifs du fournisseur.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/stscreds"

// ...

appCreds := stscreds.NewCredentials(sess, "arn:aws:iam::123456789012:role/demo")
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/credentials/stscreds"
import "github.com/aws/aws-sdk-go-v2/service/sts"

// ...

client := sts.NewFromConfig(cfg)

appCreds := stscreds.NewAssumeRoleProvider(client, "arn:aws:iam::123456789012:role/
demo")
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

AssumeRoleWithWebIdentity

Vous devez migrer l'utilisation de NewWebIdentityCredentialsNewWebIdentityRoleProvider, et NewWebIdentityRoleProviderWithTokenà utiliser NewWebIdentityRoleProvider.

La NewWebIdentityRoleProvider fonction stscreds du package doit être appelée avec un STS.client, et le rôle AWS Identity and Access Management ARN doit être assumé à l'aide

des informations d'identification configurées fourniessts.Client, et d'une implémentation d'un IdentityTokenRetrieverpour fournir le jeton d'identification OAuth 2.0 ou OpenID Connect. IdentityTokenFileest un IdentityTokenRetriever qui peut être utilisé pour fournir le jeton d'identité Web à partir d'un fichier situé sur le système de fichiers hôte de l'application. Vous pouvez également fournir un ensemble d'options fonctionnelles permettant de WebIdentityRoleOptionsmodifier d'autres paramètres facultatifs pour le fournisseur.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/stscreds"

// ...

appCreds := stscreds.NewWebIdentityRoleProvider(sess, "arn:aws:iam::123456789012:role/
demo", "sessionName", "/path/to/token")
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/stscreds"
import "github.com/aws/aws-sdk-go-v2/service/sts"

// ...

client := sts.NewFromConfig(cfg)

appCreds := aws.NewCredentialsCache(stscreds.NewWebIdentityRoleProvider(
        client,
        "arn:aws:iam::123456789012:role/demo",
        stscreds.IdentityTokenFile("/path/to/file"),
        func(o *stscreds.WebIdentityRoleOptions) {
            o.RoleSessionName = "sessionName"
        }))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
```

```
    // handle error
}
```

Clientèle du service

AWS SDK pour Go fournit des modules client de service imbriqués sous le chemin `github.com/aws/aws-sdk-go-v2/service` d'importation. Chaque client de service est contenu dans un package Go utilisant l'identifiant unique de chaque service. Le tableau suivant fournit quelques exemples de chemins d'importation de services dans le AWS SDK pour Go.

Service Name	Chemin d'importation V1	Chemin d'importation V2
Amazon S3	`github.com/aws/aws-sdk-go/service/s3`	`github.com/aws/aws-sdk-go-v2/service/s3`
Amazon DynamoDB	`github.com/aws/aws-sdk-go/service/dynamodb`	`github.com/aws/aws-sdk-go-v2/service/dynamodb`
Amazon CloudWatch Logs	`github.com/aws/aws-sdk-go/service/cloudwatchlogs`	`github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs`

Chaque package client de service est un module Go versionné indépendamment. Pour ajouter le client de service en tant que dépendance de votre application, utilisez la `go get` commande avec le chemin d'importation du service. Par exemple, pour ajouter le client Amazon S3 à vos dépendances, utilisez

```
go get github.com/aws/aws-sdk-go-v2/service/s3
```

Construction pour les clients

Vous pouvez créer des clients à l' AWS SDK pour Go aide des fonctions `New` ou du `NewFromConfig` constructeur du package du client. Lors de la migration depuis la AWS SDK pour Go version 1, nous vous recommandons d'utiliser la `NewFromConfig` variante, qui renverra un nouveau client de service en utilisant les valeurs d'un`aws.Config`. La `aws.Config` valeur aura été créée lors du

chargement de la configuration partagée du SDK à l'aide `config.LoadDefaultConfig` de. Pour plus de détails sur la création de clients de service, consultezUtiliser la AWS SDK pour Go v2 avec les AWS services.

Exemple 1

```
// V1

import "github.com/aws/aws-sdk-go/aws/session"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

sess, err := session.NewSession()
if err != nil {
    // handle error
}

client := s3.New(sess)
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg)
```

Exemple 2 : remplacement des paramètres du client

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"
```

```
import "github.com/aws/aws-sdk-go/service/s3"

// ...

sess, err := session.NewSession()
if err != nil {
    // handle error
}

client := s3.New(sess, &aws.Config{
    Region: aws.String("us-west-2"),
})
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg, func(o *s3.Options) {
    o.Region = "us-west-2"
})
```

Points de terminaison

Le package de points de terminaison n'existe plus dans le AWS SDK pour Go. Chaque client de service intègre désormais les métadonnées de point de AWS terminaison requises dans le package client. Cela réduit la taille binaire globale des applications compilées en n'incluant plus les métadonnées des points de terminaison pour les services non utilisés par votre application.

De plus, chaque service expose désormais sa propre interface pour la résolution des points de terminaison dans`EndpointResolverV2`. Chaque API utilise un ensemble unique de paramètres pour un service`EndpointParameters`, dont les valeurs proviennent du SDK depuis différents emplacements lorsqu'une opération est invoquée.

Par défaut, les clients du service utilisent leur AWS région configurée pour résoudre le point de terminaison du service pour la région cible. Si votre application nécessite un point de terminaison personnalisé, vous pouvez spécifier un comportement personnalisé sur `EndpointResolverV2` le champ de la `aws.Config` structure. Si votre application implémente un Endpoints.Resolver personnalisé, vous devez le migrer pour qu'il soit conforme à cette nouvelle interface par service.

Pour plus d'informations sur les points de terminaison et la mise en œuvre d'un résolveur personnalisé, consultez. Configuration des points de terminaison clients

Authentification

Il AWS SDK pour Go prend en charge un comportement d'authentification plus avancé, ce qui permet d'utiliser de nouvelles fonctionnalités de AWS service telles que Codecatalyst et S3 Express One Zone. De plus, ce comportement peut être personnalisé pour chaque client.

Invocation d'opérations d'API

Le nombre de méthodes de fonctionnement des clients du service a été réduit de manière significative. Les `<OperationName>` méthodes`<OperationName>Request`,`<OperationName>WithContext`, et ont toutes été consolidées en une seule méthode d'opération,`<OperationName>`.

exemple

L'exemple suivant montre comment les appels à l' PutObject opération Amazon S3 seraient migrés de la AWS SDK pour Go v1 vers la v2.

```
// V1

import "context"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

client := s3.New(sess)

// Pattern 1
output, err := client.PutObject(&s3.PutObjectInput{
    // input parameters
})
```

```
// Pattern 2
output, err := client.PutObjectWithContext(context.TODO(), &s3.PutObjectInput{
    // input parameters
})

// Pattern 3
req, output := client.PutObjectRequest(context.TODO(), &s3.PutObjectInput{
    // input parameters
})
err := req.Send()
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

client := s3.NewFromConfig(cfg)

output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
    // input parameters
})
```

Types de données de service

Les principaux types d'entrée et de sortie d'une opération se trouvent dans le package du client de service. Les types d'entrée et de sortie pour une opération donnée suivent le modèle de `<OperationName>Input` et`<OperationName>Output`, où `OperationName` est le nom de l'opération que vous invoquez. Par exemple, les formes d'entrée et de sortie pour l' PutObject opération Amazon S3 sont PutObjectOutputrespectivement PutObjectInputet.

Tous les autres types de données de service, autres que les types d'entrée et de sortie, ont été migrés vers le `types` package situé sous la hiérarchie du chemin d'importation du package du client de service. Par exemple, le s3. AccessControlPolicyle type se trouve désormais dans types. AccessControlPolicy.

Valeurs d'énumération

Le SDK fournit désormais une expérience typée pour tous les champs d'énumération d'API. Plutôt que d'utiliser une valeur littérale de chaîne copiée à partir de la documentation de référence de l'API

de service, vous pouvez désormais utiliser l'un des types concrets trouvés dans le `types` package du client de service. Par exemple, vous pouvez fournir à l' PutObjectInput opération Amazon S3 une ACL à appliquer à un objet. Dans la AWS SDK pour Go version 1, ce paramètre était un `*string` type. Dans le AWS SDK pour Go, ce paramètre est désormais un type. ObjectCannedACL. Le `types` package fournit des constantes générées pour les valeurs d'énumération valides qui peuvent être attribuées à ce champ. Par exemple, les types. ObjectCannedACLPrivateest la constante pour la valeur ACL prédéfinie « privée ». Cette valeur peut être utilisée à la place de la gestion des constantes de chaîne dans votre application.

Paramètres du pointeur

La AWS SDK pour Go v1 exigeait que des références de pointeur soient transmises pour tous les paramètres d'entrée aux opérations de service. La AWS SDK pour Go version 2 a simplifié l'expérience avec la plupart des services en supprimant le besoin de transmettre les valeurs d'entrée sous forme de pointeurs dans la mesure du possible. Cette modification signifie que de nombreuses opérations de clients de service ne nécessitent plus que votre application transmette des références de pointeur pour les types suivants : `uint8uint16`,`uint32`,`int8`,`int16`,`int32`,`float32`,,`float64`,`bool`. De même, les types d'éléments de tranche et de carte ont été mis à jour en conséquence pour indiquer si leurs éléments doivent être transmis en tant que références de pointeur.

Le package aws contient des fonctions d'assistance pour créer des pointeurs pour les types intégrés à Go. Ces aides devraient être utilisées pour gérer plus facilement la création de types de pointeurs pour ces types Go. De même, des méthodes auxiliaires sont fournies pour déréférencer en toute sécurité les valeurs des pointeurs pour ces types. Par exemple, la fonction AWS.String convertit à partir de `string` ⇒. `*string` Inversement, les lois. ToStringconvertit à partir de `*string` ⇒`string`. Lors de la mise à niveau de votre application de la AWS SDK pour Go v1 à la v2, vous devez migrer l'utilisation des assistants pour la conversion des types de pointeurs vers les variantes sans pointeur. Par exemple, aws. StringValuedoit être mis à jour vers`aws.ToString`.

Types d'erreurs

AWS SDK pour Go Il tire pleinement parti de la fonctionnalité d'encapsulation des erreurs introduite dans Go 1.13. Les services qui modélisent les réponses aux erreurs ont généré des types disponibles dans le `types` package de leur client qui peuvent être utilisés pour tester si une erreur de fonctionnement du client a été provoquée par l'un de ces types. Par exemple, `GetObject` l'opération Amazon S3 peut renvoyer une `NoSuchKey` erreur si vous tentez de récupérer une clé d'objet qui n'existe pas. Vous pouvez utiliser Errors.as pour vérifier si l'erreur d'opération renvoyée est un type.

NoSuchKeyerreur. Si un service ne modélise pas un type spécifique d'erreur, vous pouvez utiliser la forge. APIErrortype d'interface pour inspecter le code d'erreur et le message renvoyés par le service. Cette fonctionnalité remplace awserr.Error et les autres fonctionnalités awserr de la v1. AWS SDK pour Go Pour plus d'informations sur la gestion des erreurs, consultezGestion des erreurs dans la AWS SDK pour Go V2.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/awserr"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

client := s3.New(sess)

output, err := s3.GetObject(&s3.GetObjectInput{
    // input parameters
})
if err != nil {
    if awsErr, ok := err.(awserr.Error); ok {
        if awsErr.Code() == "NoSuchKey" {
            // handle NoSuchKey
        } else {
            // handle other codes
        }
        return
    }
    // handle a error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"
import "github.com/aws/smithy-go"

// ...

client := s3.NewFromConfig(cfg)
```

```
output, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    var nsk *types.NoSuchKey
    if errors.As(err, &nsk) {
        // handle NoSuchKey error
        return
    }
    var apiErr smithy.APIError
    if errors.As(err, &apiErr) {
        code := apiErr.ErrorCode()
        message := apiErr.ErrorMessage()
        // handle error code
        return
    }
    // handle error
    return
}
```

Paginateurs

Les paginateurs des opérations de service ne sont plus invoqués en tant que méthodes sur le client de service. Pour utiliser un paginateur pour une opération, vous devez créer un paginateur pour une opération en utilisant l'une des méthodes du constructeur du paginateur. Par exemple, pour utiliser la pagination sur l'`ListObjectsV2`opération Amazon S3, vous devez construire son paginateur à l'aide du s3. NewListObjectsPaginateur V2. Ce constructeur renvoie un ListObjectsV2Paginator qui fournit les méthodes`HasMorePages`, permet de déterminer s'il y a plus de pages à récupérer et d'invoquer l'opération pour récupérer la page suivante respectivement. `NextPage` Vous trouverez plus de détails sur l'utilisation des paginateurs du SDK à l'adresse. Utilisation des paginateurs d'opérations

Regardons un exemple de migration d'un paginateur AWS SDK pour Go v1 vers l'équivalent AWS SDK pour Go v2.

exemple

```
// V1

import "fmt"
import "github.com/aws/aws-sdk-go/service/s3"
```

```
// ...

client := s3.New(sess)

params := &s3.ListObjectsV2Input{
    // input parameters
}

totalObjects := 0
err := client.ListObjectsV2Pages(params, func(output *s3.ListObjectsV2Output, lastPage
 bool) bool {
    totalObjects += len(output.Contents)
    return !lastPage
})
if err != nil {
    // handle error
}
fmt.Println("total objects:", totalObjects)
```

```
// V2

import "context"
import "fmt"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

client := s3.NewFromConfig(cfg)

params := &s3.ListObjectsV2Input{
    // input parameters
}

totalObjects := 0
paginator := s3.NewListObjectsV2Paginator(client, params)
for paginator.HasMorePages() {
    output, err := paginator.NextPage(context.TODO())
    if err != nil {
        // handle error
    }
    totalObjects += len(output.Contents)
}
fmt.Println("total objects:", totalObjects)
```

Programmes d'attente

Les serveurs d'opérations de service ne sont plus invoqués en tant que méthodes sur le client de service. Pour utiliser un serveur, vous devez d'abord créer le type de serveur souhaité, puis invoquer la méthode d'attente. Par exemple, pour attendre qu'un compartiment Amazon S3 existe, vous devez créer un `BucketExists` serveur. Utilise le s3. NewBucketExistsWaiterconstructeur pour créer un s3. BucketExistsWaiter. `s3.BucketExistsWaiter`Fournit une `Wait` méthode qui peut être utilisée pour attendre qu'un bucket soit disponible.

Demandes présignées

Le SDK V1 prenait techniquement en charge la présignature de toute opération du AWS SDK, mais cela ne représente pas exactement ce qui est réellement pris en charge au niveau du service (et en réalité, la plupart des opérations de AWS service ne prennent pas en charge la présignature).

AWS SDK pour Go résout ce problème en exposant des `PresignClient` implémentations spécifiques dans des packages de services spécifiques APIs aux opérations présignables prises en charge.

Remarque : Si un service ne dispose pas d'une assistance préalable à la signature pour une opération que vous avez utilisée avec succès dans le SDK v1, veuillez nous en informer en signalant un problème sur. GitHub

Utilisations de Presign et PresignRequestdoivent être converties pour utiliser des clients de présignature spécifiques au service.

L'exemple suivant montre comment migrer la présignature d'une GetObject demande S3 :

```
// V1

import (
    "fmt"
    "time"

    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/session"
    "github.com/aws/aws-sdk-go/service/s3"
)

func main() {
    sess := session.Must(session.NewSessionWithOptions(session.Options{
```

```
        SharedConfigState: session.SharedConfigEnable,
    }))

    svc := s3.New(sess)
    req, _ := svc.GetObjectRequest(&s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("key"),
    })

    // pattern 1
    url1, err := req.Presign(20 * time.Minute)
    if err != nil {
        panic(err)
    }
    fmt.Println(url1)

    // pattern 2
    url2, header, err := req.PresignRequest(20 * time.Minute)
    if err != nil {
        panic(err)
    }
    fmt.Println(url2, header)
}
```

```
// V2

import (
    "context"
    "fmt"
    "time"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        panic(err)
    }

    svc := s3.NewPresignClient(s3.NewFromConfig(cfg))
```

```
    req, err := svc.PresignGetObject(context.Background(), &s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("key"),
    }, func(o *s3.PresignOptions) {
        o.Expires = 20 * time.Minute
    })
    if err != nil {
        panic(err)
    }

    fmt.Println(req.Method, req.URL, req.SignedHeader)
}
```

Demande de personnalisation

L'API monolithique Request.request a été recompartimentée.

Entrée/sortie d'opération

Les `Request` champs `Params` opaques`Data`, qui contiennent respectivement les structures d'entrée et de sortie de l'opération, sont désormais accessibles dans des phases d'intergiciel spécifiques en tant qu'entrée/sortie :

Des gestionnaires de demandes qui font référence à un `Request.Params` `Request.Data` intergiciel et qui doivent être migrés vers celui-ci.

migration **`Params`**

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
    "github.com/aws/aws-sdk-go/service/s3"
)

func withPutObjectDefaultACL(acl string) request.Option {
    return func(r *request.Request) {
        in, ok := r.Params.(*s3.PutObjectInput)
        if !ok {
```

```
            return
        }

        if in.ACL == nil {
            in.ACL = aws.String(acl)
        }
        r.Params = in
    }
}

func main() {
    sess := session.Must(session.NewSession())

 sess.Handlers.Validate.PushBack(withPutObjectDefaultACL(s3.ObjectCannedACLBucketOwnerFullContr

    // ...
}
```

```
// V2

import (
    "context"

    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/aws-sdk-go-v2/service/s3/types"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type withPutObjectDefaultACL struct {
    acl types.ObjectCannedACL
}

// implements middleware.InitializeMiddleware, which runs BEFORE a request has
// been serialized and can act on the operation input
var _ middleware.InitializeMiddleware = (*withPutObjectDefaultACL)(nil)

func (*withPutObjectDefaultACL) ID() string {
    return "withPutObjectDefaultACL"
}

func (m *withPutObjectDefaultACL) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
```

```
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    input, ok := in.Parameters.(*s3.PutObjectInput)
    if !ok {
        return next.HandleInitialize(ctx, in)
    }

    if len(input.ACL) == 0 {
        input.ACL = m.acl
    }
    in.Parameters = input
    return next.HandleInitialize(ctx, in)
}

// create a helper function to simplify instrumentation of our middleware
func WithPutObjectDefaultACL(acl types.ObjectCannedACL) func (*s3.Options) {
    return func(o *s3.Options) {
        o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
            return s.Initialize.Add(&withPutObjectDefaultACL{acl: acl},
 middleware.After)
        })
    }
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg,
 WithPutObjectDefaultACL(types.ObjectCannedACLBucketOwnerFullControl))
    // ...
}
```

migration **`Data`**

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
```

```
    "github.com/aws/aws-sdk-go/service/s3"
)

func readPutObjectOutput(r *request.Request) {
        output, ok := r.Data.(*s3.PutObjectOutput)
        if !ok {
            return
        }

        // ...
    }
}

func main() {
    sess := session.Must(session.NewSession())
    sess.Handlers.Unmarshal.PushBack(readPutObjectOutput)

    svc := s3.New(sess)
    // ...
}
```

```
// V2

import (
    "context"

    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type readPutObjectOutput struct{}

var _ middleware.DeserializeMiddleware = (*readPutObjectOutput)(nil)

func (*readPutObjectOutput) ID() string {
    return "readPutObjectOutput"
}

func (*readPutObjectOutput) HandleDeserialize(ctx context.Context, in
 middleware.DeserializeInput, next middleware.DeserializeHandler) (
    out middleware.DeserializeOutput, metadata middleware.Metadata, err error,
```

```
) {
    out, metadata, err = next.HandleDeserialize(ctx, in)
    if err != nil {
        // ...
    }

    output, ok := in.Parameters.(*s3.PutObjectOutput)
    if !ok {
        return out, metadata, err
    }

    // inspect output...

    return out, metadata, err
}

func WithReadPutObjectOutput(o *s3.Options) {
    o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
        return s.Initialize.Add(&withReadPutObjectOutput{}, middleware.Before)
    })
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg, WithReadPutObjectOutput)
    // ...
}
```

Requête/réponse HTTP

Les `HTTPResponse` champs `HTTPRequest` et de `Request` sont désormais exposés dans des phases de middleware spécifiques. Le middleware étant indépendant du transport, vous devez effectuer une assertion de type sur l'entrée ou la sortie du middleware pour révéler la requête ou la réponse HTTP sous-jacente.

Des gestionnaires de demandes qui font référence à un `Request.HTTPRequest` `Request.HTTPResponse` intergiciel et qui doivent être migrés vers celui-ci.

migration **`HTTPRequest`**

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
)

func withHeader(header, val string) request.Option {
    return func(r *request.Request) {
        request.HTTPRequest.Header.Set(header, val)
    }
}

func main() {
    sess := session.Must(session.NewSession())
    sess.Handlers.Build.PushBack(withHeader("x-user-header", "..."))

    svc := s3.New(sess)
    // ...
}
```

```
// V2

import (
    "context"
    "fmt"

    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type withHeader struct {
    header, val string
}

// implements middleware.BuildMiddleware, which runs AFTER a request has been
// serialized and can operate on the transport request
var _ middleware.BuildMiddleware = (*withHeader)(nil)
```

```
func (*withHeader) ID() string {
    return "withHeader"
}

func (m *withHeader) HandleBuild(ctx context.Context, in middleware.BuildInput, next
 middleware.BuildHandler) (
    out middleware.BuildOutput, metadata middleware.Metadata, err error,
) {
    req, ok := in.Request.(*smithyhttp.Request)
    if !ok {
        return out, metadata, fmt.Errorf("unrecognized transport type %T", in.Request)
    }

    req.Header.Set(m.header, m.val)
    return next.HandleBuild(ctx, in)
}

func WithHeader(header, val string) func (*s3.Options) {
    return func(o *s3.Options) {
        o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
            return s.Build.Add(&withHeader{
                header: header,
                val: val,
            }, middleware.After)
        })
    }
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg, WithHeader("x-user-header", "..."))
    // ...
}
```

Phases du gestionnaire

Les phases du middleware du SDK v2 succèdent aux phases du gestionnaire v1.

Le tableau suivant fournit un mappage approximatif des phases du gestionnaire v1 par rapport à leur emplacement équivalent au sein de la pile intergicielle V2 :

nom du gestionnaire v1	phase d'intergiciel v2
Valider	Initialiser
Génération	Sérialiser
Sign (Signer)	Finaliser
Envoyer	s.o. (1)
ValidateResponse	Désérialiser
Sous-maréchal	Désérialiser
UnmarshalMetadata	Désérialiser
UnmarshalError	Désérialiser
Réessayer	Finaliser, après le `"Retry"` middleware (2)
AfterRetry	Finaliser, avant le `"Retry"` middleware, le post- (2,3) `next.HandleFinalize()`
CompleteAttempt	Finaliser, fin de l'étape
Complet	Initialisation, début de l'étape, post- `next.HandleInitialize()` (3)

(1) La `Send` phase de la v1 est en fait l'aller-retour du client HTTP encapsulé dans la version v2. Ce comportement est contrôlé par le `HTTPClient` champ sur les options du client.

(2) Tout intergiciel situé après le `"Retry"` middleware de l'étape Finaliser fera partie de la boucle de réessai.

(3) La « pile » du middleware au moment de l'opération est intégrée à une fonction de gestion décorée à plusieurs reprises. Chaque gestionnaire est chargé d'appeler le suivant de la chaîne. Cela

signifie implicitement qu'une étape du middleware peut également agir APRÈS que l'étape suivante ait été appelée.

Par exemple, pour l'étape Initialize, qui se trouve en haut de la pile, cela signifie que les intergiciels Initialize qui agissent après avoir appelé le gestionnaire suivant opèrent effectivement à la fin de la requête :

```
// V2

import (
    "context"

    "github.com/aws/smithy-go/middleware"
)

type onComplete struct{}

var _ middleware.InitializeMiddleware = (*onComplete)(nil)

func (*onComplete) ID() string {
    return "onComplete"
}

func (*onComplete) HandleInitialize(ctx context.Context, in middleware.InitializeInput,
 next middleware.InitializeHandler) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    out, metadata, err = next.HandleInitialize(ctx, in)

    // the entire operation was invoked above - the deserialized response is
    // available opaquely in out.Result, run post-op actions here...

    return out, metadata, err
}
```

Fonctionnalités

Service de métadonnées d' EC2 instance Amazon

AWS SDK pour Go fournit un client Amazon EC2 Instance Metadata Service (IMDS) que vous pouvez utiliser pour interroger l'IMDS local lors de l'exécution de votre application sur une instance

Amazon EC2 . Le client IMDS est un module Go distinct qui peut être ajouté à votre application en utilisant

```
go get github.com/aws/aws-sdk-go-v2/feature/ec2/imds
```

Le constructeur client et les opérations de méthode ont été mis à jour pour correspondre à la conception des autres clients du service SDK.

exemple

```
// V1

import "github.com/aws/aws-sdk-go/aws/ec2metadata"

// ...

client := ec2metadata.New(sess)

region, err := client.Region()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/feature/ec2/imds"

// ...

client := imds.NewFromConfig(cfg)

region, err := client.GetRegion(context.TODO())
if err != nil {
    // handle error
}
```

Gestionnaire de transferts Amazon S3

Le gestionnaire de transfert Amazon S3 est disponible pour gérer simultanément les chargements et les téléchargements d'objets. Ce package se trouve dans un module Go en dehors du chemin

d'importation du client de service. Ce module peut être récupéré à l'aide dego `get github.com/aws/aws-sdk-go-v2/feature/s3/manager`.

s3. NewUploaderet s3. NewUploaderWithClientont été remplacés par le gestionnaire de méthodes du constructeur. NewUploaderpour créer un client Upload Manager.

s3. NewDownloaderet s3. NewDownloaderWithClientont été remplacés par un gestionnaire de méthodes à constructeur unique. NewDownloaderpour créer un client de gestion de téléchargement.

Utilitaires CloudFront de signature Amazon

AWS SDK pour Go fournit des utilitaires de CloudFront signature Amazon dans un module Go situé en dehors du chemin d'importation du client de service. Ce module peut être récupéré à l'aide dego `get`.

```
go get github.com/aws/aws-sdk-go-v2/feature/cloudfront/sign
```

Client de chiffrement Amazon S3

À partir de AWS SDK pour Go, le client de chiffrement Amazon S3 est un module distinct sous AWS Crypto Tools. La dernière version du client de chiffrement S3 pour Go, 3.x, est désormais disponible https://github.com/aws/sur amazon-s3 -. encryption-client-go Ce module peut être récupéré en utilisant `go get` :

```
go get github.com/aws/amazon-s3-encryption-client-go/v3
```

Les versions séparées `EncryptionClient` (v1, v2) et `DecryptionClient` (v1, v2) APIs ont été remplacées par un client unique, S3 EncryptionClient V3, qui expose à la fois les fonctionnalités de chiffrement et de déchiffrement.

Comme les autres clients du service AWS SDK pour Go, l'opération a APIs été condensée :

- Le `GetObjectGetObjectRequest`, et le `GetObjectWithContext` déchiffrement APIs sont remplacés par GetObject.
- Le `PutObjectPutObjectRequest`, et `PutObjectWithContext` le chiffrement APIs sont remplacés par PutObject.

Pour savoir comment migrer vers la version majeure 3.x du client de chiffrement, consultez ce guide.

Modifications apportées aux personnalisations des services

Amazon S3

Lors de la migration de la AWS SDK pour Go v1 vers la v2, un changement important à prendre en compte concerne la gestion des clés `SSECustomerKey` utilisées pour le chiffrement côté serveur avec des clés fournies par le client (SSE-C). Dans la AWS SDK pour Go version 1, l'encodage du `SSECustomerKey` vers Base64 était géré en interne par le SDK. Dans le SDK v2, ce codage automatique a été supprimé et il est désormais nécessaire de le coder manuellement en Base64 avant de le `SSECustomerKey` transmettre au SDK.

Exemple de réglage :

```
// V1

import (
  "context"
  "encoding/base64"
  "github.com/aws/aws-sdk-go-v2/config"
  "github.com/aws/aws-sdk-go-v2/service/s3"
)
// ... more code

plainTextKey := "12345678901234567890123456789012" // 32 bytes in length

// calculate md5..

_, err = client.PutObjectWithContext(context.Background(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("your-object-key"),
    Body:                 strings.NewReader("hello-world"),
    SSECustomerKey:       &plainTextKey,
    SSECustomerKeyMD5:    &base64Md5,
    SSECustomerAlgorithm: aws.String("AES256"),
})

// ... more code
```

```
// V2

import (
```

```
  "github.com/aws/aws-sdk-go/aws"
  "github.com/aws/aws-sdk-go/aws/session"
  "github.com/aws/aws-sdk-go/service/s3"
)

// ... more code

plainTextKey := "12345678901234567890123456789012" // 32 bytes in length
base64EncodedKey := base64.StdEncoding.EncodeToString([]byte(plainTextKey))

// calculate md5..

_, err = client.PutObject(context.Background(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("your-object-key"),
    Body:                 strings.NewReader("hello-world"),
    SSECustomerKey:       &base64EncodedKey,
    SSECustomerKeyMD5:    &base64Md5,
    SSECustomerAlgorithm: aws.String("AES256"),
})

// ... more code
```

Sécurité dans AWS SDK pour Go

La sécurité du cloud AWS est la priorité absolue. En tant que AWS client, vous bénéficiez de centres de données et d'architectures réseau conçus pour répondre aux exigences des entreprises les plus sensibles en matière de sécurité.

La sécurité est une responsabilité partagée entre vous AWS et vous. Le modèle de responsabilité partagée décrit cela comme la sécurité du cloud et la sécurité dans le cloud :

- Sécurité du cloud : AWS est chargée de protéger l'infrastructure qui exécute les AWS services dans le AWS Cloud. AWS vous fournit également des services que vous pouvez utiliser en toute sécurité. Des auditeurs tiers testent et vérifient régulièrement l'efficacité de notre sécurité dans le cadre des programmes de AWS conformité Programmes de de conformité. Pour en savoir plus sur les programmes de conformité qui s'appliquent à AWS SDK pour Go, voir AWS Services concernés par programme de conformitéAWS .
- Sécurité dans le cloud — Votre responsabilité est déterminée par le AWS service que vous utilisez. Vous êtes également responsable d'autres facteurs, y compris de la sensibilité de vos données, des exigences de votre entreprise, ainsi que de la législation et de la réglementation applicables.

Cette documentation vous aide à comprendre comment appliquer le modèle de responsabilité partagée lors de son utilisation AWS SDK pour Go. Les rubriques suivantes expliquent comment procéder à la configuration AWS SDK pour Go pour atteindre vos objectifs de sécurité et de conformité. Vous apprendrez également à utiliser d'autres AWS services qui vous aident à surveiller et à sécuriser vos AWS SDK pour Go ressources.

Rubriques

- Protection des données dans AWS SDK pour Go
- Validation de conformité pour AWS SDK pour Go
- Résilience dans AWS SDK pour Go

Protection des données dans AWS SDK pour Go

Le modèle de responsabilité AWS partagée de s'applique à la protection des données dans AWS SDK pour Go. Comme décrit dans ce modèle, AWS est chargé de protéger l'infrastructure mondiale qui gère tous les AWS Cloud. La gestion du contrôle de votre contenu hébergé sur

cette infrastructure relève de votre responsabilité. Vous êtes également responsable des tâches de configuration et de gestion de la sécurité des Services AWS que vous utilisez. Pour plus d'informations sur la confidentialité des données, consultez Questions fréquentes (FAQ) sur la confidentialité des données. Pour en savoir plus sur la protection des données en Europe, consultez le billet de blog Modèle de responsabilité partagée AWS et RGPD (Règlement général sur la protection des données) sur le Blog de sécuritéAWS .

À des fins de protection des données, nous vous recommandons de protéger les Compte AWS informations d'identification et de configurer les utilisateurs individuels avec AWS IAM Identity Center ou AWS Identity and Access Management (IAM). Ainsi, chaque utilisateur se voit attribuer uniquement les autorisations nécessaires pour exécuter ses tâches. Nous vous recommandons également de sécuriser vos données comme indiqué ci-dessous :

- Utilisez l'authentification multifactorielle (MFA) avec chaque compte.
- Utilisez le protocole SSL/TLS pour communiquer avec les ressources. AWS Nous exigeons TLS 1.2 et recommandons TLS 1.3.
- Configurez l'API et la journalisation de l'activité des utilisateurs avec AWS CloudTrail. Pour plus d'informations sur l'utilisation des CloudTrail sentiers pour capturer AWS des activités, consultez la section Utilisation des CloudTrail sentiers dans le guide de AWS CloudTrail l'utilisateur.
- Utilisez des solutions de AWS chiffrement, ainsi que tous les contrôles de sécurité par défaut qu'ils contiennent Services AWS.
- Utilisez des services de sécurité gérés avancés tels qu'Amazon Macie, qui contribuent à la découverte et à la sécurisation des données sensibles stockées dans Amazon S3.
- Si vous avez besoin de modules cryptographiques validés par la norme FIPS 140-3 pour accéder AWS via une interface de ligne de commande ou une API, utilisez un point de terminaison FIPS. Pour plus d'informations sur les points de terminaison FIPS disponibles, consultez Norme FIPS (Federal Information Processing Standard) 140-3.

Nous vous recommandons fortement de ne jamais placer d'informations confidentielles ou sensibles, telles que les adresses e-mail de vos clients, dans des balises ou des champs de texte libre tels que le champ Nom. Cela inclut lorsque vous travaillez avec AWS SDK pour Go ou d'autres Services AWS utilisateurs de la console, de l'API ou AWS SDKs. AWS CLI Toutes les données que vous entrez dans des balises ou des champs de texte de forme libre utilisés pour les noms peuvent être utilisées à des fins de facturation ou dans les journaux de diagnostic. Si vous fournissez une adresse URL à un serveur externe, nous vous recommandons fortement de ne pas inclure d'informations d'identification dans l'adresse URL permettant de valider votre demande adressée à ce serveur.

Validation de conformité pour AWS SDK pour Go

Pour savoir si un programme Services AWS de conformité Service AWS s'inscrit dans le champ d'application de programmes de conformité spécifiques, consultez Services AWS la section de conformité et sélectionnez le programme de conformité qui vous intéresse. Pour des informations générales, voir Programmes de AWS conformité Programmes AWS de .

Vous pouvez télécharger des rapports d'audit tiers à l'aide de AWS Artifact. Pour plus d'informations, voir Téléchargement de rapports dans AWS Artifact .

Votre responsabilité en matière de conformité lors de l'utilisation Services AWS est déterminée par la sensibilité de vos données, les objectifs de conformité de votre entreprise et les lois et réglementations applicables. AWS fournit les ressources suivantes pour faciliter la mise en conformité :

- Conformité et gouvernance de la sécurité : ces guides de mise en œuvre de solutions traitent des considérations architecturales et fournissent les étapes à suivre afin de déployer des fonctionnalités de sécurité et de conformité.
- Référence des services éligibles HIPAA : liste les services éligibles HIPAA. Tous ne Services AWS sont pas éligibles à la loi HIPAA.
- AWS Ressources de https://aws.amazon.com/compliance/resources/ de conformité — Cette collection de classeurs et de guides peut s'appliquer à votre secteur d'activité et à votre région.
- AWS Guides de conformité destinés aux clients — Comprenez le modèle de responsabilité partagée sous l'angle de la conformité. Les guides résument les meilleures pratiques en matière de sécurisation Services AWS et décrivent les directives relatives aux contrôles de sécurité dans de nombreux cadres (notamment le National Institute of Standards and Technology (NIST), le Payment Card Industry Security Standards Council (PCI) et l'Organisation internationale de normalisation (ISO)).
- Évaluation des ressources à l'aide des règles du guide du AWS Config développeur : le AWS Config service évalue dans quelle mesure les configurations de vos ressources sont conformes aux pratiques internes, aux directives du secteur et aux réglementations.
- AWS Security Hub— Cela Service AWS fournit une vue complète de votre état de sécurité interne AWS. Security Hub utilise des contrôles de sécurité pour évaluer vos ressources AWS et vérifier votre conformité par rapport aux normes et aux bonnes pratiques du secteur de la sécurité. Pour obtenir la liste des services et des contrôles pris en charge, consultez Référence des contrôles Security Hub.

- Amazon GuardDuty — Cela Service AWS détecte les menaces potentielles qui pèsent sur vos charges de travail Comptes AWS, vos conteneurs et vos données en surveillant votre environnement pour détecter toute activité suspecte et malveillante. GuardDuty peut vous aider à répondre à diverses exigences de conformité, telles que la norme PCI DSS, en répondant aux exigences de détection des intrusions imposées par certains cadres de conformité.
- AWS Audit Manager— Cela vous Service AWS permet d'auditer en permanence votre AWS utilisation afin de simplifier la gestion des risques et la conformité aux réglementations et aux normes du secteur.

Résilience dans AWS SDK pour Go

L'infrastructure AWS mondiale est construite autour Régions AWS de zones de disponibilité. Régions AWS fournissent plusieurs zones de disponibilité physiquement séparées et isolées, connectées par un réseau à faible latence, à haut débit et hautement redondant. Avec les zones de disponibilité, vous pouvez concevoir et exploiter des applications et des bases de données qui basculent automatiquement d'une zone à l'autre sans interruption. Les zones de disponibilité sont davantage disponibles, tolérantes aux pannes et ont une plus grande capacité de mise à l'échelle que les infrastructures traditionnelles à un ou plusieurs centres de données.

Pour plus d'informations sur les zones de disponibilité Régions AWS et les zones de disponibilité, consultez la section Infrastructure AWS globale.

Historique du document pour le guide du développeur de la AWS SDK pour Go version v2

Le tableau suivant décrit les versions de documentation pour la AWS SDK pour Go version 2.

Modification	Description	Date
Protection de l'intégrité des données avec des checksums	Contenu mis à jour avec des détails sur le calcul automatique de la somme de contrôle.	16 janvier 2025
Première version	Publication initiale du guide du développeur AWS SDK pour Go de la version 2	31 octobre 2024

Les traductions sont fournies par des outils de traduction automatique. En cas de conflit entre le contenu d'une traduction et celui de la version originale en anglais, la version anglaise prévaudra.