



Reference Guide

AWS Account Management



AWS Account Management: Reference Guide

Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon's trademarks and trade dress may not be used in connection with any product or service that is not Amazon's, in any manner that is likely to cause confusion among customers, or in any manner that disparages or discredits Amazon. All other trademarks not owned by Amazon are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by Amazon.

Table of Contents

What is an AWS account?	1
Features of an AWS account	3
Are you a first-time AWS user?	3
Related AWS services	4
Using the root user	4
Support and feedback	5
Other AWS resources	5
Getting started with your account	7
Review prerequisites	7
Step 1: Create your account	8
Step 2: Activate MFA for your root user	10
Step 3: Create an administrator user	10
Related topics	11
Accessing your account	11
Plan your governance structure	13
Benefits of using multiple AWS accounts	13
Managing multiple AWS accounts	14
When to use AWS Organizations	15
Enable trusted access	16
Enable a delegated admin account	17
Restrict access using SCPs	19
When to use AWS Control Tower	20
Understanding API modes of operation	21
Granting permissions to update account attributes	22
Configure your account	25
Create or update your account alias	25
Enable or disable AWS Regions in your account	25
Regional availability reference	28
Considerations before enabling and disabling Regions	30
Processing times and request limits	31
Enable or disable a Region for standalone accounts	32
Enable or disable a Region in your organization	34
Update billing for your AWS account	37
Update the root user email	37

Update the root user email for a standalone AWS account	38
Update the root user email for any AWS account in your organization	39
Update root user password	42
Update your AWS account name	43
Update your account name for a standalone AWS account	43
Update your account name for any AWS account in your organization	45
Update the alternate contacts for your AWS account	46
Phone number and email address requirements	47
Update the alternate contacts for a standalone AWS account	48
Update the alternate contacts for any AWS account in your organization	51
account:AlternateContactTypes context key	55
Update the primary contact for your AWS account	55
Phone number and email address requirements	56
Update the primary contact for a standalone AWS account or management account	56
Update the primary contact for any AWS member account in your organization	59
View your account identifiers	61
Find your AWS account ID	62
Find the canonical user ID for your AWS account	64
Secure your account	68
Data protection	69
AWS PrivateLink	70
Creating the Endpoint	70
Amazon VPC Endpoint Policies	71
Endpoint policies	71
Identity and Access Management	72
Audience	72
Authenticating with identities	72
Managing access using policies	74
AWS Account Management and IAM	75
Identity-based policy examples	83
Using identity-based policies	86
Troubleshooting	89
AWS managed policies	91
AWSAccountManagementReadOnlyAccess	91
AWSAccountManagementFullAccess	92
Policy updates	93

Compliance validation	94
Resilience	95
Infrastructure security	95
Monitor your account	96
CloudTrail logs	96
Account Management information in CloudTrail	97
Understanding the Account Management log entries	98
Monitoring Account Management events with EventBridge	101
Account Management events	101
Troubleshoot your account	104
Account creation issues	104
Account closure issues	105
I don't know how to delete or cancel my account	105
I don't see the Close account button on the Accounts page	105
I closed my account but still haven't received an email confirmation	106
I receive a "ConstraintViolationException" error when trying to close my account	106
I receive a "CLOSE_ACCOUNT_QUOTA_EXCEEDED" error when trying to close a member account	106
Do I need to delete my AWS organization before closing the management account?	107
Other issues	107
I need to change the credit card for my AWS account	107
I need to report fraudulent AWS account activity	107
I need to close my AWS account	107
Close your account	108
What you need to know before closing your account	108
How to close your account	110
What to expect after you close your account	113
Post-closure period	113
Reopening your AWS account	114
API Reference	115
Actions	117
AcceptPrimaryEmailUpdate	118
DeleteAlternateContact	123
DisableRegion	128
EnableRegion	132
GetAccountInformation	136

GetAlternateContact	142
GetContactInformation	148
GetGovCloudAccountInformation	152
GetPrimaryEmail	158
GetRegionOptStatus	162
ListRegions	166
PutAccountName	171
PutAlternateContact	176
PutContactInformation	182
StartPrimaryEmailUpdate	186
Related actions	190
CreateAccount	190
CreateGovCloudAccount	190
DescribeAccount	190
Data Types	190
AlternateContact	192
ContactInformation	194
Region	198
ValidationExceptionField	199
Common Parameters	199
Common Errors	202
Making HTTP Query requests	203
Endpoints	204
HTTPS required	204
Signing AWS Account Management API requests	204
Quotas	206
Manage accounts in India	208
Create an AWS account with AWS India	208
Manage your customer verification information	211
Check your customer verification status	211
Create your customer verification information	211
Edit your customer verification information	212
Accepted India documents for customer verification	213
Manage your AWS India account	214
Document history	215


What is an AWS account?

An AWS account represents a formal business relationship you establish with AWS. You create and manage your AWS resources in an AWS account, and your account provides identity management capabilities for access and billing. Each AWS account has a unique ID which differentiates it from other AWS accounts.

Your cloud resources and data are contained in an AWS account. An account acts as an identity and access management isolation boundary. When you need to share resources and data between two accounts, you must explicitly allow this access. By default, no access is allowed between accounts. For example, if you designate different accounts to contain your production and non-production resources and data, no access is allowed between those environments by default.

AWS accounts are also a fundamental part of accessing AWS services. As shown in the following illustration, an AWS account serves two primary functions:

- **Resources container** – An AWS account is the basic container for all the AWS resources you create as an AWS customer. For example, an Amazon Simple Storage Service (Amazon S3) bucket, an Amazon Relational Database Service (Amazon RDS) database, and an Amazon Elastic Compute Cloud (Amazon EC2) instance are all resources. Every resource is uniquely identified by an Amazon Resource Name (ARN) that includes the account ID of the account that contains, or owns, the resource.
- **Security boundary** – An AWS account is also the basic security boundary for your AWS resources. Resources that you create in your account are available to users who have credentials for your account. Among the key resources you can create in your account are *identities*, such as users and roles. Identities have credentials that someone can use to sign in (*authenticate*) to AWS. Identities also have permission policies that specify what a user can do (*authorization*) with the resources in the account.

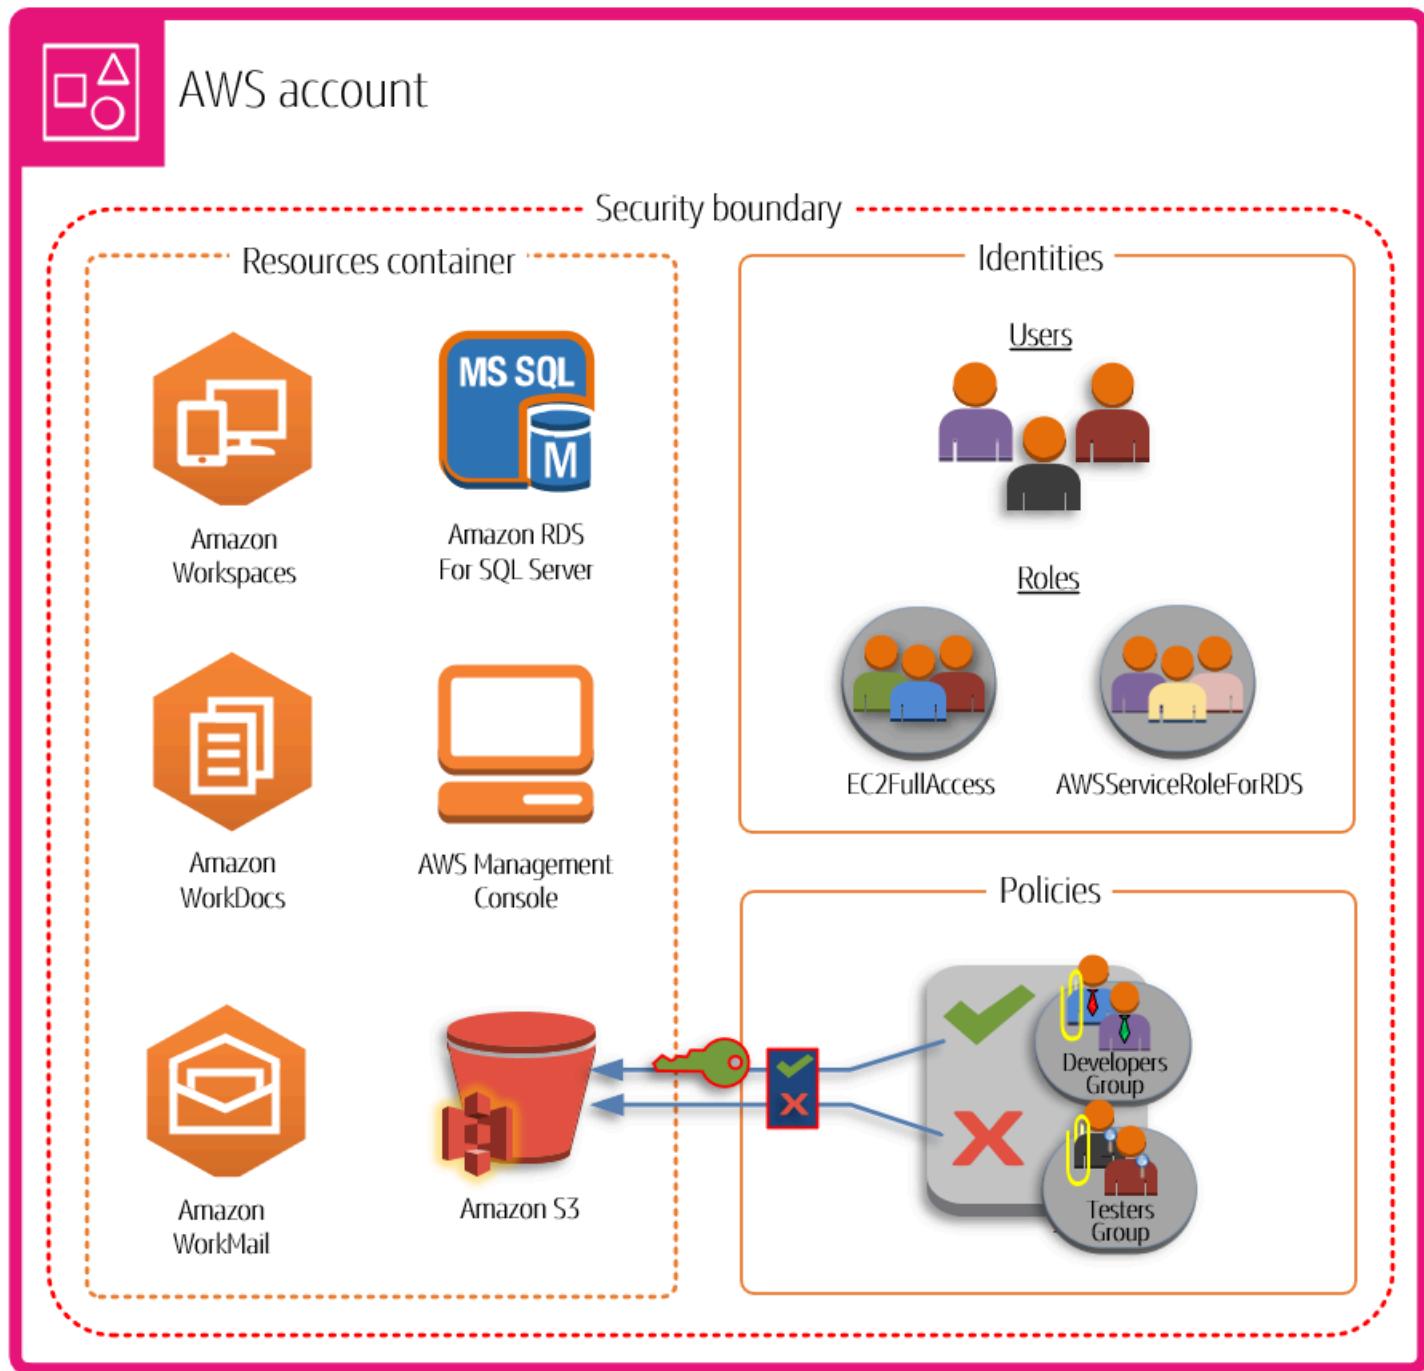

Using multiple AWS accounts is a best practice for scaling your environment, as it provides a natural billing boundary for costs, isolates resources for security, gives flexibility for individuals and teams, in addition to being adaptable for new business processes. For more information, see [Benefits of using multiple AWS accounts](#).

Features of an AWS account

AWS accounts include the following core features:

- **Monitor and control costs** – An account is the default means by which AWS costs are allocated. Because of this fact, using different accounts for different business units and groups of workloads can help you more easily track, control, forecast, budget, and report your cloud expenditures. In addition to cost reporting at the account level, AWS also has built-in support to consolidate and report costs across your entire set of accounts should you choose to use AWS Organizations at some point. You can also use AWS Service Quotas to help protect you from unexpected excessive provisioning of AWS resources and malicious actions that could dramatically impact your AWS costs.
- **Unit of isolation** – An AWS account provides security, access, and billing boundaries for your AWS resources that can help you achieve resource autonomy and isolation. By design, all resources provisioned within an account are logically isolated from resources provisioned in other accounts, even within your own AWS environment. This isolation boundary provides you with a way to limit the risks of an application-related issue, misconfiguration, or malicious actions. If an issue occurs within one account, impacts to workloads contained in other accounts can be either reduced or eliminated.
- **Mirror your business workloads** – Use multiple accounts to group workloads with a common business purpose in distinct accounts. As a result, you can align the ownership and decision making with those accounts and avoid dependencies and conflicts with how workloads in other accounts are secured and managed. Depending on your overall business model, you might choose to isolate distinct business units or subsidiaries in different accounts. This approach might also ease divestment of those units over time.

Are you a first-time AWS user?

If you're a first-time user of AWS, your first step is to sign up for an AWS account. When you sign up, AWS creates an account with the details that you provide and assigns the account to you. After you create your AWS account, sign in as the [root user](#), activate multi-factor authentication (MFA) for the root user, and assign administrative access to a user.

For step-by-step instructions on how to set up a new account, see [Getting started with an AWS account](#).

Related AWS services

AWS accounts work seamlessly with the following services:

- **IAM**

Your AWS account is closely integrated with AWS Identity and Access Management (IAM). You can use IAM with your account to ensure that other people who work in your account have as much access as they need to get their jobs done. You also use IAM to control access to all of your AWS resources, not only account specific information. It's important that you familiarize yourself with the major concepts and best practices of IAM before you get too far along with setting up the structure of your AWS account. For more information, see [Security best practices in IAM](#) in the *IAM User Guide*.

- **AWS Organizations**

If your company is large or likely to grow, you might want to set up multiple AWS accounts that reflect your company's specific structure. AWS Organizations provides the underlying infrastructure and capabilities for you to build and manage your multi-account environments. You can combine your existing accounts into an organization that enables you to manage the accounts centrally. You can create accounts that automatically are a part of your organization, and you can invite other accounts to join your organization. You also can attach policies that affect some or all of your accounts. For more information, see [When to use AWS Organizations](#).

- **AWS Control Tower**

AWS Control Tower provides a simplified way to set up and govern a secure, multi-account AWS environment. AWS Control Tower automates the creation of your multi-account environment using AWS Organizations, instantiating a set of initial accounts and with some default guardrails and configurations for the environment. You can use AWS Control Tower to provision new AWS accounts in a few steps while ensuring that the accounts conform to your organizational policies. For more information, see [When to use AWS Control Tower](#).

Using the AWS account root user

When you create an AWS account, you begin with one sign-in identity called the AWS account *root user* that has complete access to all AWS services and resources. We strongly recommend that you don't use the root user for everyday tasks. For tasks that require root user credentials, see [Tasks that require root user credentials](#) in the *IAM User Guide*.

To avoid using the root user for everyday tasks, learn how to [set up an administrative user in AWS IAM Identity Center](#). For additional root user security recommendations, see [Root user best practices for your AWS account](#).

Important

Anyone who has root user credentials for your AWS account has unrestricted access to all the resources in your account, including billing information.

You can [change](#), or [reset the root user password](#), and [create](#), or [delete access keys](#) (access key IDs and secret access keys) for your root user. For help signing in using your root user, see [Sign in to the AWS Management Console as the root user](#) in the *AWS Sign-In User Guide*.

Support for AWS Account Management

You can post feedback and questions using the [AWS Account Management support forum](#). For general information about AWS forums, see [AWS re:Post](#).

If you can't find the answers you're looking for on AWS re:Post, you can create an account or billing related support case using the AWS Management Console. For more information, see [Example: Create a support case for account and billing](#).

Other AWS resources

- [AWS Training and Courses](#) – Links to role-based and specialty courses as well as self-paced labs to help sharpen your AWS skills and gain practical experience.
- [AWS Developer Tools](#) – Links to developer tools and resources that provide documentation, code examples, release notes, and other information to help you build innovative applications with AWS.
- [AWS Support Center](#) – The hub for creating and managing your AWS Support cases. Also includes links to other helpful resources, such as forums, technical FAQs, service health status, and AWS Trusted Advisor.
- [AWS Support](#) – The primary webpage for information about AWS Support, a one-on-one, fast-response support channel to help you build and run applications in the cloud.
- [Contact Us](#) – A central contact point for inquiries concerning AWS billing, account, events, abuse, and other issues.

- **AWS Site Terms** – Detailed information about our copyright and trademark; your account, license, and site access; and other topics.

Getting started with an AWS account

If you're new to AWS, the first step is to sign up for an AWS account. When you do so, AWS will create an account using the details you provide and assign it to you.

The topics in this section will help you get started with learning about and setting up a new AWS account.

Topics

- [Prerequisites for creating a new AWS account](#)
- [Create an AWS account](#)
- [Activate MFA for your root user](#)
- [Create an administrator user](#)
- [Accessing your AWS account](#)

Prerequisites for creating a new AWS account

To sign up for an AWS account, you'll need to provide the following information:

- **Root user email address** – The email address is used as the sign-in name for the [root user](#) and is required for account recovery. You must be able to receive email messages that are sent to this address. Before you can perform certain tasks, you must verify that you have access to email sent to this address.
- **AWS account name** – The name of the account appears in several places, such as on your invoice, and in consoles such as the Billing and Cost Management dashboard and the AWS Organizations console. We recommend that you use a standard way to name your accounts so that you can give your accounts names that are easy to recognize. For company accounts, consider using a naming standard such as *organization-purpose-environment* (for example, *AnyCompany-audit-prod*). For personal accounts, consider using a naming standard such as *first name-last name-purpose* (for example, *paulo-santos-testaccount*).
- **Address** – If your contact and billing address is in India, the user agreement for your account is with Amazon Web Services India Private Limited (AWS India), a local AWS seller in India. You must provide your CVV as part of the verification process. You might also have to enter a one-time password, depending on your bank. AWS India charges your payment method 2 INR as part of the verification process. AWS India refunds the 2 INR after verification is complete.

- **Phone number** – This number is used for identity verification purposes and to confirm the ownership of your account. You must be able to receive calls and SMS messages at this phone number.

 **Important**

If this account is for a business, use a corporate phone number so that your company can retain access to the AWS account even when an employee changes positions or leaves the company.

Create an AWS account

These instructions are for creating an AWS account outside of India. For creating an account in India, see [Create an AWS account with AWS India](#). For creating an account that's part of an organization managed by AWS Organizations, see [Creating a member account in an organization](#) in the *AWS Organizations User Guide*.

AWS Management Console

To create an AWS account

1. Open the [Sign up for AWS](#) page.
2. Enter the root user email address and AWS account name, and then choose **Verify email address**. This will send a verification code to your specified email address.

 **Important**

If this account is for a business, use a secure corporate distribution list (for example, `it.admins@example.com`) so that your company can retain access to the AWS account even when an employee changes positions or leaves the company. Because the email address can be used to reset the account's root user credentials, protect access to this distribution list or address.

3. Enter your verification code, and then choose **Verify**.
4. Enter a strong password for your root user, confirm it, and then choose **Continue**. AWS requires that your password meet the following conditions:

- It must have a minimum of 8 characters and a maximum of 128 characters.
- It must include a minimum of three of the following mix of character types: uppercase, lowercase, numbers, and ! @ # \$ % ^ & * () <> [] {} | _+= symbols.
- It must not be identical to your AWS account name or email address.

5. Choose **Business** or **Personal**. Personal accounts and business accounts have the same features and functions.
6. Enter your company or personal information.

 **Important**

For business AWS accounts, it's a best practice to enter a company phone number rather than a number for a personal phone. Configuring the account's root user with an individual email address or a personal phone number can make your account insecure.

7. Read and accept the [AWS Customer Agreement](#). Be sure that you read and understand the terms of the AWS Customer Agreement.
8. Choose **Continue**. At this point, you'll receive an email message to confirm that your AWS account is ready to use. You can sign in to your new account by using the email address and password you provided during sign up. However, you can't use any AWS services until you finish activating your account.
9. Enter the information about your payment method, and then choose **Verify and Continue**. If you want to use a different billing address for your AWS billing information, choose **Use a new address**.

You can't proceed with the sign-up process until you add a valid payment method.

10. Enter your country or region code from the list, and then enter a phone number where you can be reached in the next few minutes.
11. Enter the code displayed in the CAPTCHA, and then submit.
12. When the automated system contacts you, enter the PIN you receive and then submit.
13. Select one of the available AWS Support plans. For a description of the available Support plans and their benefits, see [Compare Support plans](#).
14. Choose **Complete sign up**. A confirmation page appears that indicates that your account is being activated.

15. Check your email and spam folder for an email message that confirms your account was activated. Activation usually takes a few minutes but can sometimes take up to 24 hours.
16. After you receive the activation message, you can sign-in to the [AWS Management Console](#) to start using AWS services. For general information about how to manage your account settings, see [Configure your AWS account](#).

AWS CLI & SDKs

You can create member accounts in an organization that is managed by AWS Organizations by running the [CreateAccount](#) operation while signed in to the organization's management account.

You can't create a standalone AWS account outside of an organization by using an AWS Command Line Interface (AWS CLI) or AWS API operation.

Activate MFA for your root user

We strongly recommend that you activate MFA for your root user. MFA dramatically lowers the risk of someone accessing your account without your authorization.

1. Sign in to the [AWS Management Console](#) as the account owner by choosing **Root user** and entering your AWS account email address. On the next page, enter your password.

For help signing in using your root user, see [Sign in to the AWS Management Console as the root user](#) in the [AWS Sign-In User Guide](#).

2. Turn on MFA for your root user.

For instructions, see [Enable a virtual MFA device for your AWS account root user \(console\)](#) in the [IAM User Guide](#).

Create an administrator user

Because you can't restrict what a root user can do, we strongly recommend that you don't use your root user for any tasks that don't explicitly require the root user. Instead, assign administrative access to an administrative user in IAM Identity Center, and sign in as that administrative user to perform your daily administrative tasks.

For instructions, see [Set up AWS account access for an IAM Identity Center administrative user](#) in the *IAM Identity Center User Guide*.

Related topics

- For information about protecting your root user credentials, see [Securing the credentials for the root user](#) in the *IAM User Guide*.
- For a list of tasks that require the root user, see [Tasks that require root user credentials](#) in the *IAM User Guide*.

Accessing your AWS account

You can access your AWS account in any of the following ways:

AWS Management Console

[The AWS Management Console](#) is a browser-based interface that you can use to manage your AWS account settings and your AWS resources.

AWS Command Line Tools

With the AWS command line tools, you can issue commands at your system's command line to perform AWS account and AWS tasks. Working with the command line can be faster and more convenient than using the console. The command line tools also are useful if you want to build scripts that perform AWS tasks. AWS provides two sets of command line tools:

- [AWS Command Line Interface](#) (AWS CLI). For information about installing and using the AWS CLI, see the [AWS Command Line Interface User Guide](#).
- [AWS Tools for Windows PowerShell](#). For information about installing and using the Tools for Windows PowerShell, see the [AWS Tools for PowerShell User Guide](#).

AWS SDKs

The AWS SDKs consist of libraries and sample code for various programming languages and platforms (for example, Java, Python, Ruby, .NET, iOS, and Android). The SDKs take care of tasks such as cryptographically signing requests, managing errors, and retrying requests automatically. For more information about the AWS SDKs, including how to download and install them, see [Tools for Amazon Web Services](#).

AWS Account Management HTTPS Query API

The AWS Account Management HTTPS Query API gives you programmatic access to your AWS account and AWS. The HTTPS Query API lets you issue HTTPS requests directly to the service. When you use the HTTPS API, you must include code to digitally sign requests using your credentials. For more information, see [Calling the API by making HTTP Query requests](#).

Plan your AWS account governance structure

Although you might have started your AWS journey with a single account, AWS recommends that you set up multiple accounts as your workloads grow in size and complexity. Whether you are a medium business or a large enterprise, you'll want to create a governance structure plan that will ensure your data and your workload needs are met.

This section covers the benefits and governance services available in AWS to help enable a multi-account governance structure.

Topics

- [Benefits of using multiple AWS accounts](#)
- [When to use AWS Organizations](#)
- [When to use AWS Control Tower](#)
- [Understanding API modes of operation](#)

Benefits of using multiple AWS accounts

AWS accounts form the foundational security boundary in the AWS Cloud. They serve as a container for resources, providing a critical layer of isolation that is essential for creating a secure, well-governed environment. For more information, see [What is an AWS account?](#)

Separating your resources into separate AWS accounts helps you to support the following principles in your cloud environment:

- **Security control** – Different applications can have different security profiles, requiring different control policies and mechanisms around them. For example, it's far easier to talk to an auditor and be able to point to a single AWS account that hosts all elements of your workload that are subject to [Payment Card Industry \(PCI\) Security Standards](#).
- **Isolation** – An AWS account is a unit of security protection. Potential risks and security threats should be contained within an AWS account without affecting others. There could be different security needs due to different teams or different security profiles.
- **Many teams** – Different teams have their different responsibilities and resource needs. You can prevent teams from interfering with each other by moving them to separate AWS accounts.

- **Data isolation** – In addition to isolating the teams, it's important to isolate the data stores to an account. This can help limit the number of people that can access and manage that data store. This helps contain exposure to highly private data and therefore can help in compliance with the [European Union's General Data Protection Regulation \(GDPR\)](#).
- **Business process** – Different business units or products may have completely different purposes and processes. With multiple AWS accounts, you can support a business unit's specific needs.
- **Billing** – An account is the only true way to separate items at a billing level. Multiple accounts help separate items at a billing level across business units, functional teams, or individual users. You can still get all of your bills consolidated to a single payer (using AWS Organizations and consolidated billing) while having line items separated by AWS account.
- **Quota allocation** – AWS service quotas are enforced separately for each AWS account. Separating workloads into different AWS accounts prevents them from consuming quotas for each other.

All of the recommendations and procedures described in this document are in compliance with the [AWS Well-Architected Framework](#). This framework is intended to help you design a flexible, resilient, and scalable cloud infrastructure. Even when you are starting small, we recommend that you proceed in compliance with this guidance in the framework. Doing so can help you scale your environment securely and without impacting your ongoing operations as you grow.

Managing multiple AWS accounts

Before you start adding multiple accounts, you'll want to develop a plan to manage them. For that, we recommend that you use [AWS Organizations](#), which is a free AWS service to manage all of the AWS accounts in your organization.

AWS also offers AWS Control Tower, which adds layers of AWS managed automation to Organizations and automatically integrates it with other AWS services like AWS CloudTrail, AWS Config, Amazon CloudWatch, AWS Service Catalog, and others. These services can incur additional costs. For more information, see [AWS Control Tower pricing](#).

See also

- [When to use AWS Organizations](#)
- [When to use AWS Control Tower](#)

When to use AWS Organizations

AWS Organizations is an AWS service that you can use to manage your AWS accounts as a group. This provides features like consolidated billing, where all of your accounts' bills are grouped together and handled by a single payer. You can also centrally manage the security of your organization by using policy based controls. For more information about AWS Organizations, see the [AWS Organizations User Guide](#).

Trusted access

When you use AWS Organizations to manage your accounts as a group, most administrative tasks for the organization can be performed by only the organization's *management account*. By default, this includes only operations related to managing the organization itself. You can extend this additional functionality to other AWS services by enabling *trusted access* between Organizations and that service. Trusted access grants permissions to the specified AWS service to access information about the organization and the accounts it contains. When you enable trusted access for Account Management, the Account Management service grants Organizations and its management account permissions to access the metadata, such as the primary or alternate contact information, for all of the organization's member accounts.

For more information, see [Enable trusted access for AWS Account Management](#).

Delegated admin

After you enable trusted access, you can also choose to designate one of your member accounts as a *delegated admin* account for AWS Account Management. This allows the delegated admin account to perform the same Account Management metadata management tasks for the member accounts in your organization that previously only the management account could do. The delegated admin account can access only the management tasks for the Account Management service. The delegated admin account doesn't have all of the administrative access to the organization that the management account has.

For more information, see [Enable a delegated admin account for AWS Account Management](#).

Service control policies

When your AWS account is part of an organization that is managed by AWS Organizations, then the administrator of the organization can apply [service control policies \(SCPs\)](#) that can limit what the principals in member accounts can do. An SCP never grants permissions; instead, it is a filter

that limits what permissions can be used by the member account. A user or role (*a principal*) in a member account can perform only those operations that are in the intersection of what is allowed by the SCPs that apply to the account and the IAM permission policies attached to the principal. For example, you can use SCPs to prevent any principal in an account from modifying their own account's alternate contacts.

For example SCPs that apply to AWS accounts, see [Restrict access using AWS Organizations service control policies](#).

Enable trusted access for AWS Account Management

Enabling trusted access for AWS Account Management allows the administrator of the management account to modify the information and metadata (for example, primary or alternate contact details) specific to each member account in AWS Organizations. For more information, see [AWS Account Management and AWS Organizations](#) in the *AWS Organizations User Guide*. For general information about how trusted access works, see [Using AWS Organizations with other AWS services](#).

After trusted access has been enabled, you can use the `accountId` parameter in those [Account Management API operations](#) that support it. You can use this parameter successfully only if you call the operation using credentials from the management account, or from the delegated admin account for your organization if you enable one. For more information, see [Enable a delegated admin account for AWS Account Management](#).

Use the following procedure to enable trusted access for Account Management in your organization.

Minimum permissions

To perform these tasks, you must meet the following requirements:

- You can perform this only from the organization's management account.
- Your organization must have [all features enabled](#).

AWS Management Console

To enable trusted access for AWS Account Management

1. Sign in to the [AWS Organizations console](#). You must sign in as an IAM user, assume an IAM role, or sign in as the root user (not recommended) in the organization's management account.
2. Choose **Services** in the navigation pane.
3. Choose **AWS Account Management** in the list of services.
4. Choose **Enable trusted access**.
5. In the **Enable trusted access for AWS Account Management** dialog box, type **enable** to confirm it, and then choose **Enable trusted access**.

AWS CLI & SDKs

To enable trusted access for AWS Account Management

After running the following command, you can use credentials from the organization's management account to call Account Management API operations that use the `--accountId` parameter to reference member accounts in an organization.

- AWS CLI: [enable-aws-service-access](#)

The following example enables trusted access for AWS Account Management in the calling account's organization.

```
$ aws organizations enable-aws-service-access \
  --service-principal account.amazonaws.com
```

This command produces no output if it's successful.

Enable a delegated admin account for AWS Account Management

You enable a delegated admin account so you can call the AWS Account Management API operations for other member accounts in AWS Organizations. After you register a delegated admin account for your organization, users and roles in that account can call the AWS CLI and AWS SDK operations in the account namespace that can work in the Organizations mode by supporting an optional `AccountId` parameter.

To register a member account in your organization as a delegated admin account, use the following procedure.

AWS CLI & SDKs

To register a delegated admin account for the Account Management service

You can use the following commands to enable a delegated admin for the Account Management service.

Minimum permissions

To perform these tasks, you must meet the following requirements:

- You can perform this only from the organization's management account.
- Your organization must have [all features enabled](#).
- You must have [enabled trusted access for Account Management in your organization](#).

You must specify the following service principal:

```
account.amazonaws.com
```

- AWS CLI: [register-delegated-administrator](#)

The following example registers a member account of the organization as a delegated admin for the Account Management service.

```
$ aws organizations register-delegated-administrator \
  --account-id 123456789012 \
  --service-principal account.amazonaws.com
```

This command produces no output if it's successful.

After you run this command, you can use credentials from account 123456789012 to call Account Management AWS CLI and SDK API operations that use the `--account-id` parameter to reference member accounts in an organization.

AWS Management Console

This task isn't supported in the AWS Account Management management console. You can perform this task only by using the AWS CLI or an API operation from one of the AWS SDKs.

Restrict access using AWS Organizations service control policies

This topic presents examples that show how you can use service control policies (SCPs) in AWS Organizations to restrict what the users and roles in the accounts in your organization can do. For more information about service control policies, see the following topics in the *AWS Organizations User Guide*:

- [Creating SCPs](#)
- [Attaching SCPs to OUs and accounts](#)
- [Strategies for SCPs](#)
- [SCP policy syntax](#)

Example 1: Prevent accounts from modifying their own alternate contacts

The following example denies the PutAlternateContact and DeleteAlternateContact API operations from being called by any member account in [standalone account mode](#). This prevents any principal in the affected accounts from changing their own alternate contacts.

JSON

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Sid": "Statement1",  
            "Effect": "Deny",  
            "Action": [  
                "account:PutAlternateContact",  
                "account:DeleteAlternateContact"  
            ],  
            "Resource": [ "arn:aws:account::*:account" ]  
        }  
    ]  
}
```

{

Example 2: Prevent any member account from modifying alternate contacts for any other member account in the organization

The following example generalizes the Resource element to "*", which means that it applies to both [standalone mode requests and organizations mode requests](#). This means that even the delegated admin account for Account Management, if the SCP applies to it, is blocked from changing any alternate contact for any account in the organization.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "Statement1",  
      "Effect": "Deny",  
      "Action": [  
        "account:PutAlternateContact",  
        "account:DeleteAlternateContact"  
      ],  
      "Resource": [ "*" ]  
    }  
  ]  
}
```

Example 3: Prevent a member account in an OU from modifying its own alternate contacts

The following example SCP includes a condition that compares the account's organization path to a list of two OUs. This results in blocking a principal in any account in the specified OUs from modifying their own alternate contacts.

When to use AWS Control Tower

AWS Organizations is the foundational service that enables you to centrally manage and secure your entire AWS environment. A crucial component of this AWS Organizations-centric approach is AWS Control Tower. AWS Control Tower acts as a management console within Organizations,

providing a streamlined way to set up and govern a secure, multi-account AWS environment by applying prescriptive best practices.

This security best practices approach provided by AWS Control Tower extends the core capabilities of AWS Organizations. AWS Control Tower applies a set of preventive and detective guardrails to help ensure your organization and accounts remain aligned with recommended security and compliance standards.

By establishing a well-architected AWS Organizations structure with AWS Control Tower, you can quickly deploy a scalable, secure, and compliant AWS environment. This centralized approach to cloud management and governance is essential for enterprises looking to harness the full power of the AWS Cloud while maintaining the highest standards of security and compliance.

For more information, see [What is AWS Control Tower?](#) in the *AWS Control Tower User Guide*.

Understanding API modes of operation

The API operations that work with an AWS account's attributes always work in one of two modes of operation:

- **Standalone context** – this mode is used when a user or role in an account accesses or changes an account attribute in the *same account*. The standalone context mode is automatically used when you **don't** include the AccountId parameter when you call one of the Account Management AWS CLI or AWS SDK operations.
- **Organizations context** – this mode is used when a user or role in one account in an organization accesses or changes an account attribute in a different member account in the same organization. The organizations context mode is automatically used when you **do** include the AccountId parameter when you call one of the Account Management AWS CLI or AWS SDK operation. You can call the operations in this mode from only the management account of the organization, or the delegated admin account for Account Management.

The AWS CLI and AWS SDK operations can work in either standalone or organizations context.

- If you **don't** include the AccountId parameter, then the operation runs in the standalone context and automatically applies the request to the account you used to make the request. This is true whether or not the account is a member of an organization.
- If you **do** include the AccountId parameter, then the operation runs in the organizations context, and the operation works on the specified Organizations account.

- If the account calling the operation is the management account or the delegated admin account for the Account Management service, then you can specify any member account of that organization in the `AccountId` parameter to update the specified account.
- The only account in an organization that can call one of the alternate contact operations and specify its own account number in the `AccountId` parameter is the account specified as the [delegated admin account](#) for the Account Management service. Any other account, including the management account, receives an `AccessDenied` exception.
- If you run an operation in standalone mode, then you must be permitted to run the operation with an IAM policy that includes a Resource element of either "*" to allow all resources, or an [ARN that uses the syntax for a standalone account](#).
- If you run an operation in organizations mode, then you must be permitted to run the operation with an IAM policy that includes a Resource element of either "*" to allow all resources, or an [ARN that uses the syntax for a member account in an organization](#).

Granting permissions to update account attributes

As with most AWS operations, you grant permissions to add, update, or delete account attributes for AWS accounts by using [IAM permission policies](#). When you attach an IAM permission policy to an IAM principal (either a user or role), you specify which actions that principal can perform on which resources, and under what conditions.

The following are some Account Management specific considerations for creating a permissions policy.

Amazon Resource Name format for AWS accounts

- The [Amazon Resource Name \(ARN\)](#) for an AWS account that you can include in the `resource` element of a policy statement is constructed differently based on whether the account you want to reference is a standalone account or an account that is in an organization. See the previous section on [Understanding API modes of operation](#).
- An account ARN for a standalone account:

```
arn:aws:account::{AccountId}:account
```

You must use this format when you run an account attributes operation in standalone mode by not including the `AccountId` parameter.

- An account ARN for a member account in an organization:

```
arn:aws:account::{ManagementAccountId}:account/o-{OrganizationId}/{AccountId}
```

You must use this format when you run an account attributes operation in organizations mode by including the AccountID parameter.

Context keys for IAM policies

The Account Management service also provides several [Account Management service-specific condition keys](#) that provide fine-grained control over the permissions you grant.

account:AccountResourceOrgPaths

The context key account:AccountResourceOrgPaths lets you specify a path through your organization's hierarchy to a specific organizational unit (OU). Only member accounts that are contained by that OU match the condition. The following example snippet restricts the policy to apply to only accounts that are in either of two specified OUs.

Because account:AccountResourceOrgPaths is a multi-valued string type, you must use the [ForAnyValue or ForAllValues multi-value string operators](#). Also, note that the prefix on the condition key is account, even though you're referencing paths to OUs in an organization.

```
"Condition": {  
    "ForAnyValue:StringLike": {  
        "account:AccountResourceOrgPaths": [  
            "o-aa111bb222/r-a1b2/ou-a1b2-f6g7h111/*",  
            "o-aa111bb222/r-a1b2/ou-a1b2-f6g7h222/*"  
        ]  
    }  
}
```

account:AccountResourceOrgTags

The context key account:AccountResourceOrgTags lets you reference the tags that can be attached to an account in an organization. A tag is a key/value string pair that you can use to categorize and label the resources in your account. For more information about tagging, see [Tag Editor](#) in the *AWS Resource Groups User Guide*. For information about using tags as part of

an attribute-based access control strategy, see [What is ABAC for AWS](#) in the *IAM User Guide*. The following example snippet restricts the policy to apply to only accounts in an organization that have the tag with the key `project` and a value of either `blue` or `red`.

Because `account:AccountResourceOrgTags` is a multi-valued string type, you must use the [ForAnyValue](#) or [ForAllValues](#) multi-value string operators. Also, note that the prefix on the condition key is `account`, even though you're referencing the tags on an organization's member account.

```
"Condition": {  
    "ForAnyValue:StringLike": {  
        "account:AccountResourceOrgTags/project": [  
            "blue",  
            "red"  
        ]  
    }  
}
```

 **Note**

You can attach tags to only an account in an organization. You can't attach tags to a standalone AWS account.

Configure your AWS account

This section includes topics that describe how to manage your AWS account.

Note

If your AWS account was created in India by using Amazon Web Services India Private Limited (AWS India), there are additional considerations. For more information, see [Manage accounts in India](#).

Topics

- [Create an AWS account alias](#)
- [Enable or disable AWS Regions in your account](#)
- [Update billing for your AWS account](#)
- [Update the root user email address](#)
- [Update root user password](#)
- [Update your AWS account name](#)
- [Update the alternate contacts for your AWS account](#)
- [Update the primary contact for your AWS account](#)
- [View AWS account identifiers](#)

Create an AWS account alias

If you want the URL for your IAM users to contain your company name (or another easy-to-remember identifier) instead of the AWS account ID, you can create an *account alias*.

To learn how to create or update an account alias, see [Using an alias for your AWS account ID](#) in the *IAM User Guide*.

Enable or disable AWS Regions in your account

An *AWS Region* is a physical location in the world where AWS has multiple Availability Zones. Availability Zones consist of one or more discrete AWS data centers, each with redundant power, networking, and connectivity, housed in separate facilities. This means that each AWS Region is

physically isolated and independent of the other Regions. Regions provide fault tolerance, stability, and resilience, and can also reduce latency. Running workloads in an AWS Region closer to end users can improve performance and lower latency. For a map of available and upcoming Regions, see [Regions and Availability Zones](#). To learn more about AWS Regions and resiliency architecture for your workloads, visit [AWS multi-Region fundamentals](#).

AWS Regions broadly fall into two categories of availability for accounts:

- **Default Regions** – Regions launched before March 20, 2019 are enabled by default. You can create and manage resources in these default Regions immediately after your account activation. Default Regions cannot be enabled or disabled.
- **Opt-in Regions** – Regions launched after March 20, 2019 are disabled by default and referred to as opt-in Regions. Disabled opt-in Regions are not shown in the Console Navigation bar, and you cannot use these Regions to create workloads until they are enabled. To use these opt-in Regions, you must first enable them in your AWS account. After enabling an opt-in Region, you can select that Region in the navigation bar and create and manage resources in that Region. To enable opt-in Region for your standalone accounts, see [Enable or disable a Region for standalone accounts](#) and to enable opt-in Region for your member accounts, see [Enable or disable a Region in your organization](#).

When you sign up for an AWS account, AWS recommends an opt-in Region for you based on your contact address country. Customers in a country with an AWS opt-in Region see a recommendation on the Contact Information page to enable the opt-in Region in that country. Customers in a country with both an opt-in Region and a default Region, like India, Australia, or Canada, see a recommendation to select the opt-in Region if the opt-in Region is closer to them than the default Region. After an account is activated, you can enable other AWS opt-in Regions in your account or choose to disable the opt-in Region you enabled during sign-up.

When you create an AWS account, your IAM data and credentials are automatically configured to work across all default Regions, allowing the root user and IAM identities with appropriate permissions to access AWS services in these Regions using their existing credentials. AWS opt-in Regions are disabled by default, and IAM data and credentials are not initially available in these Regions, which prevents access to AWS services in that Region. When you choose to enable an opt-in Region, AWS propagates your IAM data and credentials to that Region. Once the propagation is complete and the opt-in Region is enabled, the root user and IAM identities can then access AWS services in the newly enabled opt-in Region using the same IAM credentials they use in default Regions.

When you disable an opt-in Region, your IAM credentials are deactivated and you lose IAM access to the resources in that opt-in Region. Disabling an opt-in Region does not delete the resources in that Region and charges for resources (if any) in that disabled opt-in Region continue to accrue at the standard rate.

Important

Disabling a Region disables IAM access to resources in the Region. This does not delete the resources in question, which continue to incur charges. Remove any remaining resources prior to disabling a Region.

AWS groups Regions into [partitions](#). Every Region is in exactly one partition, and each partition has one or more Regions. Partitions have independent instances of AWS Identity and Access Management (IAM) and provide a hard boundary between Regions in different partitions. AWS commercial Regions are in the aws partition, Regions in China are in the aws-cn partition, and AWS GovCloud (US) Regions are in the aws-us-gov partition. Depending on the partition where you created your AWS account, you can use AWS Regions within that partition.

- An account in aws partition provides you access to multiple Regions in the commercial partition so that you can launch AWS resources in locations that meet your requirements. For example, you might want to launch Amazon EC2 instances in Europe to be closer to your European customers or to meet legal requirements.
- An account in aws-us-gov partition provides you access to the AWS GovCloud (US-West) Region and the AWS GovCloud (US-East) Region. For more information, see [AWS GovCloud \(US\)](#).
- An account in aws-cn partition provides you access to the Beijing and Ningxia Regions only. For more information, see [Amazon Web Services in China](#).

Topics

- [Regional availability reference](#)
- [Considerations before enabling and disabling Regions](#)
- [Processing times and request limits](#)
- [Enable or disable a Region for standalone accounts](#)
- [Enable or disable a Region in your organization](#)

Regional availability reference

The following tables list AWS Regions by availability type. Default Regions are enabled automatically and cannot be disabled, while opt-in Regions must be manually enabled before you can use them:

Opt-in Regions

The following Regions are opt-in Regions that must be enabled before you can use them:

Name	Code	Status
Africa (Cape Town)	af-south-1	GA
Asia Pacific (Hong Kong)	ap-east-1	GA
Asia Pacific (Taipei)	ap-east-2	GA
Asia Pacific (Hyderabad)	ap-south-2	GA
Asia Pacific (Jakarta)	ap-southeast-3	GA
Asia Pacific (Melbourne)	ap-southeast-4	GA
Asia Pacific (Malaysia)	ap-southeast-5	GA
Asia Pacific (New Zealand)	ap-southeast-6	GA
Asia Pacific (Thailand)	ap-southeast-7	GA
Canada West (Calgary)	ca-west-1	GA
Europe (Zurich)	eu-central-2	GA
Europe (Milan)	eu-south-1	GA
Europe (Spain)	eu-south-2	GA
Israel (Tel Aviv)	il-central-1	GA
Middle East (UAE)	me-central-1	GA

Name	Code	Status
Middle East (Bahrain)	me-south-1	GA
Mexico (Central)	mx-central-1	GA

Default Regions

The following Regions are enabled by default and cannot be disabled:

Name	Code
Asia Pacific (Tokyo)	ap-northeast-1
Asia Pacific (Seoul)	ap-northeast-2
Asia Pacific (Osaka)	ap-northeast-3
Asia Pacific (Mumbai)	ap-south-1
Asia Pacific (Singapore)	ap-southeast-1
Asia Pacific (Sydney)	ap-southeast-2
Canada (Central)	ca-central-1
Europe (Frankfurt)	eu-central-1
Europe (Stockholm)	eu-north-1
Europe (Ireland)	eu-west-1
Europe (London)	eu-west-2
Europe (Paris)	eu-west-3
South America (São Paulo)	sa-east-1
US East (N. Virginia)	us-east-1

Name	Code
US East (Ohio)	us-east-2
US West (N. California)	us-west-1
US West (Oregon)	us-west-2

For a list of Region names and their corresponding codes, see [Regional endpoints](#) in the *AWS General Reference Guide*. For a list of AWS services supported in each Region (without endpoints), see the [AWS Regional Services List](#).

Important

AWS recommends that you use regional AWS Security Token Service (AWS STS) endpoints instead of the global endpoint to reduce latency. Session tokens from regional AWS STS endpoints are valid in all AWS Regions. If you use regional AWS STS endpoints, you don't need to make any changes. However, session tokens from the *global* AWS STS endpoint (<https://sts.amazonaws.com>) are valid only in AWS Regions that you enable, or that are enabled by default. If you intend to enable a new Region for your account, you can either use session tokens from regional AWS STS endpoints or activate the global AWS STS endpoint to issue session tokens that are valid in all AWS Regions. Session tokens that are valid in all Regions are larger. If you store session tokens, these larger tokens might affect your systems. For more information about how AWS STS endpoints work with AWS Regions, see [Managing AWS STS in an AWS Region](#).

Considerations before enabling and disabling Regions

Before you enable or disable a Region, it's important to consider the following:

- You can use all destination Regions in a cross-Region inference geography regardless of Region-opt status** – Certain AWS generative AI services including Amazon Bedrock (see [Increase throughput with cross-Region inference](#)) and Amazon Q Developer (see [Cross-region processing in Amazon Q Developer](#)) use cross-region inference. If you use those services, they automatically select the optimal AWS Region—including Regions that you have not enabled for resources and

IAM data-within your chosen geography. This improves the customer experience by maximizing available compute and model availability.

- **You can use IAM permissions to control access to Regions** – AWS Identity and Access Management (IAM) includes four permissions that let you control which users can enable, disable, get, and list Regions. For more information, see [AWS: Allows enabling and disabling AWS Regions](#) in the *IAM User Guide*. You can also use the `aws:RequestedRegion` condition key to control access to AWS services in an AWS Region.
- **Enabling and disabling a Region is free** – There is no charge to enable or disable a Region. You're charged only for resources that you create in the new Region.
- **Amazon EventBridge integration** – You can subscribe to region-opt status update notifications in EventBridge. An EventBridge notification will be created for each status change, allowing customers to automate work flows.
- **Expressive Region-opt status** – Due to the asynchronous nature of enabling/disabling an opt-in region, there are four potential statuses for a region-opt request:
 - ENABLING
 - DISABLING
 - ENABLED
 - DISABLED

You cannot cancel an opt-in or opt-out when it is in either ENABLING or DISABLING status. Otherwise, a `ConflictException` will be thrown. A completed (Enabled/Disabled) region-opt request is dependent on the provisioning of key underlying AWS services. There might be some AWS services that will not be immediately usable despite the status being ENABLED.

Processing times and request limits

When enabling or disabling Regions, be aware of the following timing and request limitations:

- **Enabling a Region takes a few minutes to several hours in some cases** – When you enable a Region, AWS performs actions to prepare your account in that Region, such as distributing your IAM resources to the Region. This process takes a few minutes for most accounts, but can sometimes take several hours. You cannot use the Region until this process is complete.
- **Disabling a Region isn't always immediately visible** – Services and consoles might be temporarily visible after disabling a region. Disabling a Region can take a few minutes to several hours to take effect.

- **A single account can have 6 region-opt requests in progress at any given time** – One request is equal to either an enable or disable of one particular region for one account.
- **Organizations can have 50 region-opt requests open at a given time across an AWS organization** – The management account can at any point in time have 50 open requests pending completion for its organization. One request is equal to either an enable or disable of one particular region for one account.

Enable or disable a Region for standalone accounts

To update which Regions your AWS account has access to, perform the steps in the following procedure. The AWS Management Console procedure below always works only in the standalone context. You can use the AWS Management Console to view or update only the available Regions in the account you used to call the operation.

AWS Management Console

To enable or disable a Region for a standalone AWS account

Minimum permissions

To perform the steps in the following procedure, an IAM user or role must have the following permissions:

- account>ListRegions (needed to view the list of AWS Regions and whether they are currently enabled or disabled).
- account>EnableRegion
- account>DisableRegion

1. Sign in to the [AWS Management Console](#) as either the AWS account root user or as an IAM user or role that has the minimum permissions.
2. Choose your account name on the top right of the window, and then choose **Account**.
3. On the [Account page](#), scroll down to the section **AWS Regions**.
4. Choose the Region that you want to enable or disable and then choose the desired action **Enable or Disable**. You will see a prompt to confirm.
5. If you chose the **Enable** option, review the displayed text and then choose **Enable region**.

If you chose the **Disable** option, review the displayed text, type **disable** to confirm, and then choose **Disable region**.

After the opt-in Region is enabled, you can select that Region from the Region navigation bar. For steps to select a Region, see [Choosing a Region from the navigation bar in the AWS Management Console](#) and for Region specific console setting in your account, see [Setting the default Region in the AWS Management Console](#).

AWS CLI & SDKs

You can enable, disable, read and list region opt status by using the following AWS CLI commands or their AWS SDK equivalent operations:

- `EnableRegion`
- `DisableRegion`
- `GetRegionOptStatus`
- `ListRegions`

Minimum permissions

To perform the following steps, you must have the permission that maps to that operation:

- `account:EnableRegion`
- `account:DisableRegion`
- `account:GetRegionOptStatus`
- `account>ListRegions`

If you use these individual permissions, you can grant some users the ability to only read region opt information, and grant others the ability to both read and write.

The following example enables a region for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

Note that you can also disable a region using the same command and then replacing enable-region with disable-region.

```
aws account enable-region --region-name af-south-1
```

This command produces no output if it's successful.

The operation is asynchronous. The following command will allow you to see the latest status of the request.

```
aws account get-region-opt-status --region-name af-south-1
{
  "RegionName": "af-south-1",
  "RegionOptStatus": "ENABLING"
}
```

Enable or disable a Region in your organization

To update the enabled Regions for member accounts of your AWS Organizations, perform the steps in the following procedure.

Note

The AWS Organizations managed policies `AWSOrganizationsReadOnlyAccess` or `AWSOrganizationsFullAccess` are updated to provide permission to access the AWS Account Management APIs so you can access account data from the AWS Organizations console. To view the updated managed policies, see [Updates to Organizations AWS managed policies](#).

Note

Before you can perform these operations from the management account or a delegated admin account in an organization for use with member accounts, you must:

- Enable all features in your organization to manage settings on your member accounts. This allows admin control over the member accounts. This is set by default when you

create your organization. If your organization is set to consolidated billing only, and you want to enable all features, see [Enabling all features in your organization](#).

- Enable trusted access for the AWS Account Management service. To set this up, see [Enable trusted access for AWS Account Management](#).

AWS Management Console

To enable or disable a Region in your organization

1. Sign in to the AWS Organizations console with your organization's management account credentials.
2. On the **AWS accounts** page, select the account that you want to update.
3. Choose the **Account settings** tab.
4. Under **Regions**, select the Region you want to enable or disable.
5. Choose **Actions**, and then choose either **Enable** or **Disable** option.
6. If you chose the **Enable** option, review the displayed text and then choose **Enable region**.
7. If you chose the **Disable** option, review the displayed text, type **disable** to confirm, and then choose **Disable region**.

AWS CLI & SDKs

You can enable, disable, read and list region opt status for organization member accounts by using the following AWS CLI commands or their AWS SDK equivalent operations:

- `EnableRegion`
- `DisableRegion`
- `GetRegionOptStatus`
- `ListRegions`

Minimum permissions

To perform the following steps, you must have the permission that maps to that operation:

- `account:EnableRegion`

- account:DisableRegion
- account:GetRegionOptStatus
- account>ListRegions

If you use these individual permissions, you can grant some users the ability to only read region opt information, and grant others the ability to both read and write.

The following example enables a region for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

Note that you can also disable a region using the same command and then replacing enable-region with disable-region.

```
aws account enable-region --account-id 123456789012 --region-name af-south-1
```

This command produces no output if it's successful.

 Note

An organization can only have up to 20 region requests at a given time. Otherwise, you will receive a `TooManyRequestsException`.

The operation is asynchronous. The following command will allow you to see the latest status of the request.

```
aws account get-region-opt-status --account-id 123456789012 --region-name af-south-1
{
  "RegionName": "af-south-1",
  "RegionOptStatus": "ENABLING"
}
```

Update billing for your AWS account

You can update all of your AWS account billing preferences using the AWS Billing and Cost Management console. To learn how to update billing-related settings for your account, see the [AWS Billing and Cost Management User Guide](#):

Update the root user email address

There are various business reasons why you might need to update the root user email address of your AWS account. For example, security and administrative resilience. This topic walks you through the process of updating your root user email address for both standalone and member accounts.

 **Note**

Changes to an AWS account can take up to four hours to propagate everywhere.

You can update the root user email differently, depending on whether or not the accounts are standalone, or part of an organization:

- **Standalone AWS accounts** – For AWS accounts not associated with an organization, you can update the root user email using the AWS Management Console. To learn how to do this, see [Update the root user email for a standalone AWS account](#).
- **AWS accounts within an organization** – For member accounts that are part of an AWS organization, a user in the management account or delegated admin account can centrally update the root user email of the member account from the AWS Organizations console, or programmatically via the AWS CLI & SDKs. To learn how to do this, see [Update the root user email for any AWS account in your organization](#).

Topics

- [Update the root user email for a standalone AWS account](#)
- [Update the root user email for any AWS account in your organization](#)

Update the root user email for a standalone AWS account

To edit the root user email address for a standalone AWS account, perform the steps in the following procedure.

AWS Management Console

Note

You must sign in as the AWS account root user, which requires no additional IAM permissions. You can't perform these steps as an IAM user or role.

1. Use your AWS account's email address and password to sign in to the [AWS Management Console](#) as your AWS account root user.
2. In the upper right corner of the console, choose your account name or number and then choose **Account**.
3. On the [Account page](#), next to **Account details**, choose **Actions** and then select **Update email address and password**.
4. On the **Account Details** page, next to **Email address** choose **Edit**.
5. On the **Edit Account Email** page, fill out the fields for **New email address**, **Confirm new email address**, and confirm your current **Password**. Then, choose **Save and continue**. A verification code is sent to your new email address from `no-reply@verify.signin.aws`.
6. On the **Edit Account Email** page, under **Verification code**, enter the code you received from your email, and then choose **Confirm updates**.

Note

It can take up to 5 minutes for the verification code to arrive. If you don't see the email in your inbox, check your spam and junk folders.

AWS CLI & SDKs

This task isn't supported in the AWS CLI or by an API operation from one of the AWS SDKs. You can perform this task only by using the AWS Management Console.

Update the root user email for any AWS account in your organization

To edit the root user email address for any member account in your organization using the AWS Organizations console, perform the steps in the following procedure.

Note

Before you update the root user email address for a member account, we recommend that you understand the impact of this operation. For more information, see [Updating the root user email address for a member account with AWS Organizations](#) in the *AWS Organizations User Guide*.

You can also update the root user email address for a member account directly from the [Account page](#) in the AWS Management Console after signing in as the root user. For step-by-step instructions, follow the steps provided in [Update the root user email for a standalone AWS account](#).

AWS Management Console

Notes

- To perform this procedure from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account Management service](#).
- You can't use this procedure to access an account in a different organization from the one you're using to call the operation.

To update the root user email address for a member account using the AWS Organizations console

1. Sign in to the [AWS Organizations console](#). You must sign in as an IAM user, or sign in as the root user ([not recommended](#)) in the organization's management account.
2. On the **AWS accounts** page, choose the member account for which you want to update the root user email address.
3. In the **Account details** section, choose the **Actions** button, and then choose **Update email address**.

4. Under **Email**, enter the new email address for the root user, and then choose **Save**. This sends a one-time password (OTP) to the new email address.

 **Note**

If you need to close this page in the Organizations console while you wait for the code, you can return and finish the OTP process within 24 hours from when the code was sent. To do this, while on the **Account details** page, choose the **Actions** button, and then choose **Complete email update**.

5. Under **Verification code**, enter the code that was sent to the new email address in the previous step, and then choose **Confirm**. This commits the update to the root user for the account.

AWS CLI & SDKs

You can retrieve, or update the **root user** email address (also referred to as the primary email address) by using the following AWS CLI commands or their AWS SDK equivalent operations:

- [GetPrimaryEmail](#)
- [StartPrimaryEmailUpdate](#)
- [AcceptPrimaryEmailUpdate](#)

 **Notes**

- To perform these operations from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account Management service](#).
- You can't access an account in a different organization from the one you're using to call the operation.

 **Minimum permissions**

For each operation, you must have the permission that maps to that operation:

- account:GetPrimaryEmail

- account:StartPrimaryEmailUpdate
- account:AcceptPrimaryEmailUpdate

If you use these individual permissions, you can grant some users the ability to only read the root user email address information, and grant others the ability to both read and write.

To complete the root user email address process, you must use the primary email APIs together in the order they are shown in the examples below.

Example GetPrimaryEmail

The following example retrieves the root user email address from the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account get-primary-email --account-id 123456789012
```

Example StartPrimaryEmailUpdate

The following example starts the root user email address update process, identifies the new email address, and sends a one-time password (OTP) to the new email address for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account start-primary-email-update --account-id 123456789012 --primary-email john@examplecorp.com
```

Example AcceptPrimaryEmailUpdate

The following example accepts the OTP code and sets the new email address to the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account accept-primary-email-update --account-id 123456789012 --otp 12345678  
--primary-email john@examplecorp.com
```

Update root user password

To edit your AWS account's root user password, perform the steps in the following procedure.

AWS Management Console

To edit your root user password

Note

You must sign in as the AWS account root user, which requires no additional IAM permissions. You can't perform these steps as an IAM user or role.

1. Use your AWS account's email address and password to sign in to the [AWS Management Console](#) as your AWS account root user.
2. In the upper right corner of the console, choose your account name or number and then choose **Account**.
3. On the [Account page](#), next to **Account details**, choose **Actions** and then select **Update email address and password**.
4. On the **Account Details** page, next to **Password** choose **Edit**.
5. On the **Edit password** page, fill out the fields for **Current password**, **New password**, and **Confirm new password**. Then, choose **Update password**. For additional guidance including best practices for setting root user passwords, see [Change the password for the AWS account root user](#) in the *IAM User Guide*.

AWS CLI & SDKs

This task isn't supported in the AWS CLI or by an API operation from one of the AWS SDKs. You can perform this task only by using the AWS Management Console.

Update your AWS account name

When managing multiple AWS accounts, use clear naming conventions aligned with business units and applications for identification and organization. During reorganizations, mergers, acquisitions, or naming convention updates, you might need to rename accounts to maintain consistent identification and administrative standards.

The name of an account appears in several places, such as on your invoice and in consoles such as the Billing and Cost Management dashboard and the AWS Organizations console. We recommend that you use a standard way to name your accounts so that your account names are easy to recognize. For company accounts, consider using a naming standard such as *organization-purpose-environment* (for example, *sales-catalog-prod*). For privacy and security reasons, avoid using account names that reflect personally identifiable information (PII).

- **Standalone AWS accounts** – For AWS accounts not associated with an organization, you can update your account name using the AWS Management Console, or the AWS CLI and SDKs. To learn how to do this, see [Update your account name for a standalone AWS account](#).
- **AWS accounts within an organization** – For member accounts that are part of a AWS Organizations, a user in the management account or delegated admin account can centrally update the account name of any member account in the organization from the AWS Organizations console, or programmatically via the AWS CLI and SDKs. To learn how to do this, see [Update your account name for any AWS account in your organization](#).

 **Note**

Changes to an AWS account can take up to four hours to propagate everywhere.

Topics

- [Update your account name for a standalone AWS account](#)
- [Update your account name for any AWS account in your organization](#)

Update your account name for a standalone AWS account

To change the account name for a standalone AWS account, perform the steps in the following procedure.

AWS Management Console

Minimum permissions

You can update your account name using the root user, an IAM user, or an IAM role.

If you're using the root user, no additional IAM permissions are needed to update an account name. When using an IAM user or IAM role, you must have at least the following IAM permissions:

- `account:GetAccountInformation`
- `account:PutAccountName`

To update the account name for a standalone account

1. Use your AWS account's email address and password to sign in to the [AWS Management Console](#) as your AWS account root user.
2. In the upper right corner of the console, choose your account name or number and then choose **Account**.
3. On the [Account page](#), next to **Account details**, choose **Actions** and then select **Update account name**.
4. Under **Name**, enter the new account name you want to update, and then choose **Save**.

AWS CLI & SDKs

Minimum permissions

You can update your account name using the root user, an IAM user, or an IAM role. To perform the following steps, your IAM user or IAM role must have at least the following IAM permissions:

- `account:GetAccountInformation`
- `account:PutAccountName`

To update the account name for a standalone account

You can use one of the following operations:

- AWS CLI: [put-account-name](#)

```
$ C:\> aws account put-account-name \
--account-name "New-Account-Name"
```

- AWS SDKs: [PutAccountName](#)

Update your account name for any AWS account in your organization

In AWS Organizations with all features mode, authorized IAM users or IAM roles in both management and delegated admin accounts can centrally manage account names.

To change the account name for any member account in your organization, perform the steps in the following procedure.

Requirements

To update an account name with the AWS Organizations console, you need to do some preliminary settings:

- Your organization must enable *all features* to manage settings on your member accounts. This allows admin control over the member accounts. This is set by default when you create your organization. If your organization is set to *consolidated billing* only, and you want to enable all features, see [Enabling all features for an organization](#).
- You need to enable trusted access for the AWS Account Management service. To set this up, see [Enable trusted access for AWS Account Management](#).

AWS Management Console

Minimum permissions

To update the account name for a member account, your IAM user or IAM role must have the following permissions:

- organizations:DescribeOrganization (console only)
- account:PutAccountName

To update the account name for a member account

1. Open the Organizations console at <https://console.aws.amazon.com/organizations/>.
2. In the left navigation pane, choose **AWS accounts**.
3. On the **AWS accounts** page, choose the member account that you want to update, choose the **Actions** drop-down menu, and then choose **Update account name**.
4. Under **Name**, enter the updated name, and choose **Save**.

AWS CLI & SDKs

Minimum permissions

To update the account name for a member account, your IAM user or IAM role must have the following permissions:

- organizations:DescribeOrganization (console only)
- account:PutAccountName

To update the account name for a member account

You can use one of the following operations:

- AWS CLI: [put-account-name](#)

```
$ C:\> aws account put-account-name \
  --account-id 111111111111 \
  --account-name "New-Account-Name"
```

- AWS SDKs: [PutAccountName](#)

Update the alternate contacts for your AWS account

Alternate contacts allows AWS to contact up to three alternate contacts associated with the account. An alternate contact doesn't have to be a specific person. You could instead add an email distribution list if you have a team that manages billing, operations and security related

issues. These are in addition to the email address associated with the [root user](#) of the account. The [primary account contact](#) will continue to receive all email communications sent to the root account's email.

You can specify only one of each of the following contact types associated with an account.

- Billing contact
- Operations contact
- Security contact

You can add or edit alternate contacts differently, depending on whether or not the accounts are standalone, or part of an organization:

- **Standalone AWS accounts** – For AWS accounts not associated with an organization, you can update your own alternate contacts using the AWS Management Console, or via AWS CLI & SDKs. To learn how to do this, see [Update the alternate contacts for a standalone AWS account](#).
- **AWS accounts within an organization** – For member accounts that are part of an AWS organization, a user in the management account or delegated admin account can centrally update any member account in the organization from the AWS Organizations console, or programmatically via the AWS CLI & SDKs. To learn how to do this, see [Update the alternate contacts for any AWS account in your organization](#).

Topics

- [Phone number and email address requirements](#)
- [Update the alternate contacts for a standalone AWS account](#)
- [Update the alternate contacts for any AWS account in your organization](#)
- [account:AlternateContactTypes context key](#)

Phone number and email address requirements

Before you proceed with updating your account's alternate contacts information, we recommend that you first review the following requirements when entering phone numbers and email addresses.

- Phone numbers can only contain numbers, whitespaces and the following characters:"+-()".

- Email addresses can be up to 254 characters long and can include the following special characters in the local portion of the email address in addition to the standard alphanumeric ones: "+=.#|!&-_".

Update the alternate contacts for a standalone AWS account

To add or edit the alternate contacts for a standalone AWS account, perform the steps in the following procedure. The AWS Management Console procedure below always works *only* in the standalone context. You can use the AWS Management Console to access or change only the alternate contacts in the account you used to call the operation.

AWS Management Console

To add or edit the alternate contacts for a standalone AWS account

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- account:GetAlternateContact (to see the alternate contact details)
- account:PutAlternateContact (to set or update an alternate contact)
- account:DeleteAlternateContact (to delete an alternate contact)

1. Sign in to the [AWS Management Console](#) as an IAM user or role that has the minimum permissions.
2. Choose your account name on the top right of the window, and then choose **Account**.
3. On the [Account page](#), scroll down to **Alternate contacts**, and to the right of the title, choose **Edit**.

 Note

If you don't see the **Edit** option, it is likely that you are not signed in as the root user for your account or as someone who has the minimum permissions specified above.

4. Change the values in any of the available fields.

 Important

For business AWS accounts, it's a best practice to enter a company phone number and email address rather than one belonging to an individual.

5. After you have made all of your changes, choose **Update**.

AWS CLI & SDKs

You can retrieve, update, or delete the **alternate** contact information by using the following AWS CLI commands or their AWS SDK equivalent operations:

- [GetAlternateContact](#)
- [PutAlternateContact](#)
- [DeleteAlternateContact](#)

 Notes

- To perform these operations from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account service](#).

 Minimum permissions

For each operation, you must have the permission that maps to that operation:

- `GetAlternateContact` (to see the alternate contact details)

- `PutAlternateContact` (to set or update an alternate contact)
- `DeleteAlternateContact` (to delete an alternate contact)

If you use these individual permissions, you can grant some users the ability to only read the contact information, and grant others the ability to both read and write.

Example

The following example retrieves the current Billing alternate contact for the caller's account.

```
$ aws account get-alternate-contact \
  --alternate-contact-type=BILLING
{
  "AlternateContact": {
    "AlternateContactType": "BILLING",
    "EmailAddress": "saanvi.sarkar@amazon.com",
    "Name": "Saanvi Sarkar",
    "PhoneNumber": "+1(206)555-0123",
    "Title": "CFO"
  }
}
```

Example

The following example sets a new Operations alternate contact for the caller's account.

```
$ aws account put-alternate-contact \
  --alternate-contact-type=OPERATIONS \
  --email-address=mateo_jackson@amazon.com \
  --name="Mateo Jackson" \
  --phone-number="+1(206)555-1234" \
  --title="Operations Manager"
```

This command produces no output if it's successful.

Example

Note

If you perform multiple `PutAlternateContact` operations on the same AWS account and the same contact type, the first adds the new contact, and all successive calls to the same AWS account and contact type update the existing contact.

Example

The following example deletes the Security alternate contact for the caller's account.

```
$ aws account delete-alternate-contact \
--alternate-contact-type=SECURITY
```

This command produces no output if it's successful.

Note

If you try to delete the same contact more than once, the first succeeds silently. All later attempts generate a `ResourceNotFoundException`.

Update the alternate contacts for any AWS account in your organization

To add or edit the alternate contact details for any AWS account in your organization, perform the steps in the following procedure.

Requirements

To update alternate contacts with the AWS Organizations console, you need to do some preliminary settings:

- Your organization must enable *all features* to manage settings on your member accounts. This allows admin control over the member accounts. This is set by default when you create your organization. If your organization is set to *consolidated billing* only, and you want to enable all features, see [Enabling all features for an organization](#).

- You need to enable trusted access for the AWS Account Management service. To set this up, see [Enable trusted access for AWS Account Management](#).

Note

The AWS Organizations managed policies `AWSOrganizationsReadOnlyAccess` or `AWSOrganizationsFullAccess` are updated to provide permission to access the AWS Account Management APIs so you can access account data from the AWS Organizations console. To view the updated managed policies, see [Updates to Organizations AWS managed policies](#).

AWS Management Console

To add or edit the alternate contacts for any AWS account in your organization

1. Sign in to the [AWS Organizations console](#) with the organization's management account credentials.
2. From **AWS accounts**, select the account that you want to update.
3. Choose **Contact info**, and under **Alternate contacts**, locate the type of contact: **Billing contact**, **Security contact**, or **Operations contact**.
4. To add a new contact, select **Add**, or to update an existing contact select **Edit**.
5. Change the values in any of the available fields.

Important

For business AWS accounts, it's a best practice to enter a company phone number and email address rather than one belonging to an individual.

6. After you have made all of your changes, choose **Update**.

AWS CLI & SDKs

You can retrieve, update, or delete the **alternate** contact information by using the following AWS CLI commands or their AWS SDK equivalent operations:

- [GetAlternateContact](#)

- [PutAlternateContact](#)
- [DeleteAlternateContact](#)

Notes

- To perform these operations from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account service](#).
- You can't access an account in a different organization from the one you're using to call the operation.

Minimum permissions

For each operation, you must have the permission that maps to that operation:

- GetAlternateContact (to see the alternate contact details)
- PutAlternateContact (to set or update an alternate contact)
- DeleteAlternateContact (to delete an alternate contact)

If you use these individual permissions, you can grant some users the ability to only read the contact information, and grant others the ability to both read and write.

Example

The following example retrieves the current Billing alternate contact for the caller's account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account get-alternate-contact \
  --alternate-contact-type=BILLING \
  --account-id 123456789012
{
```

```
"AlternateContact": {  
    "AlternateContactType": "BILLING",  
    "EmailAddress": "saanvi.sarkar@amazon.com",  
    "Name": "Saanvi Sarkar",  
    "PhoneNumber": "+1(206)555-0123",  
    "Title": "CFO"  
}  
}
```

Example

The following example sets the Operations alternate contact for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account put-alternate-contact \  
  --account-id 123456789012 \  
  --alternate-contact-type=OPERATIONS \  
  --email-address=mateo_jackson@amazon.com \  
  --name="Mateo Jackson" \  
  --phone-number="+1(206)555-1234" \  
  --title="Operations Manager"
```

This command produces no output if it's successful.

Note

If you perform multiple PutAlternateContact operations on the same AWS account and the same contact type, the first adds the new contact, and all successive calls to the same AWS account and contact type update the existing contact.

Example

The following example deletes the Security alternate contact for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account delete-alternate-contact \  
  --account-id 123456789012 \  
  --alternate-contact-type=SECURITY
```

This command produces no output if it's successful.

Example

Note

If you try to delete the same contact more than once, the first succeeds silently. All later attempts generate a `ResourceNotFoundException`.

account:AlternateContactTypes context key

You can use the context key `account:AlternateContactTypes` to specify which of the three billing types is allowed (or denied) by the IAM policy. For example, the following example IAM permission policy uses this condition key to allow the attached principals to retrieve, but not modify, only the BILLING alternate contact for a specific account in an organization.

Because `account:AlternateContactTypes` is a multi-valued string type, you must use the [ForAnyValue](#) or [ForAllValues](#) multi-value string operators.

Update the primary contact for your AWS account

You can update the primary contact information associated with your account, including your contact's full name, company name, mailing address, telephone number, and website address.

You edit the primary account contact differently, depending on whether or not the accounts are standalone, or part of an organization:

- **Standalone AWS accounts** – For AWS accounts not associated with an organization, you can update your own primary account contact using the AWS Management Console, or via AWS CLI & SDKs. To learn how to do this, see [Update standalone AWS account primary contact](#).
- **AWS accounts within an organization** – For member accounts that are part of an AWS organization, a user in the management account or delegated admin account can centrally update any member account in the organization from the AWS Organizations console, or programmatically via the AWS CLI & SDKs. To learn how to do this, see [Update AWS account primary contact in your organization](#).

Topics

- [Phone number and email address requirements](#)
- [Update the primary contact for a standalone AWS account or management account](#)
- [Update the primary contact for any AWS member account in your organization](#)

Phone number and email address requirements

Before you proceed with updating your account's primary contact information, we recommend that you first review the following requirements when entering phone numbers and email addresses.

- Phone numbers should only contain numbers.
- Phone numbers must start with a + and country code and must not have any leading zeros or additional spaces after the country code. For example, +1 (US/Canada) or +44 (UK).
- Phone numbers must not include hyphens "-" or whitespaces between the area code, exchange code, and local code. For example, +12025550179.
- For security purposes, phone numbers must be capable of receiving SMS from AWS. Toll free numbers will not be accepted since most don't support SMS.
- For business AWS accounts, it's a best practice to enter a company phone number and email address rather than one belonging to an individual. Configuring the accounts [root user](#) with an individual's email address or phone number can make your account difficult to recover if that individual leaves the company.

Update the primary contact for a standalone AWS account or management account

To edit your primary contact details for a standalone AWS account, perform the steps in the following procedure. The AWS Management Console procedure below always works *only* in the standalone context. You can use the AWS Management Console to access or change only the primary contact information of the account you used to call the operation.

AWS Management Console

To edit your primary contact for a standalone AWS account

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- `account:GetContactInformation` (to see the primary contact details)
- `account:PutContactInformation` (to update the primary contact details)

1. Sign in to the [AWS Management Console](#) as an IAM user or role that has the minimum permissions.
2. Choose your account name on the top right of the window, and then choose **Account**.
3. Scroll down to the section **Contact information**, and next to it choose **Edit**.
4. Change the values in any of the available fields.
5. After you have made all of your changes, choose **Update**.

AWS CLI & SDKs

You can retrieve, update, or delete the **primary** contact information by using the following AWS CLI commands or their AWS SDK equivalent operations:

- [GetContactInformation](#)
- [PutContactInformation](#)

Notes

- To perform these operations from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account service](#).

Minimum permissions

For each operation, you must have the permission that maps to that operation:

- `account:GetContactInformation`
- `account:PutContactInformation`

If you use these individual permissions, you can grant some users the ability to only read the contact information, and grant others the ability to both read and write.

Example

The following example retrieves the current primary contact information for the caller's account.

```
$ aws account get-contact-information
{
    "ContactInformation": {
        "AddressLine1": "123 Any Street",
        "City": "Seattle",
        "CompanyName": "Example Corp, Inc.",
        "CountryCode": "US",
        "DistrictOrCounty": "King",
        "FullName": "Saanvi Sarkar",
        "PhoneNumber": "+15555550100",
        "PostalCode": "98101",
        "StateOrRegion": "WA",
        "WebsiteUrl": "https://www.examplecorp.com"
    }
}
```

Example

The following example sets new primary contact information for the caller's account.

```
$ aws account put-contact-information --contact-information \
'{"AddressLine1": "123 Any Street", "City": "Seattle", "CompanyName": "Example Corp, Inc.", "CountryCode": "US", "DistrictOrCounty": "King", "FullName": "Saanvi Sarkar", "PhoneNumber": "+15555550100", "PostalCode": "98101", "StateOrRegion": "WA", "WebsiteUrl": "https://www.examplecorp.com"}'
```

This command produces no output if it's successful.

Update the primary contact for any AWS member account in your organization

To edit your primary contact details in any AWS member account in your organization, perform the steps in the following procedure.

Additional requirements

To update primary contact with the AWS Organizations console, you need to do some preliminary settings:

- Your organization must enable *all features* to manage settings on your member accounts. This allows admin control over the member accounts. This is set by default when you create your organization. If your organization is set to *consolidated billing* only, and you want to enable all features, see [Enabling all features for an organization](#).
- You need to enable trusted access for the AWS Account Management service. To set this up, see [Enable trusted access for AWS Account Management](#).

AWS Management Console

To edit your primary contact for any AWS account in your organization

1. Sign in to the [AWS Organizations console](#) with the organization's management account credentials.
2. From **AWS accounts**, select the account that you want to update.
3. Choose **Contact info**, and locate **Primary contact**,
4. Select **Edit**.
5. Change the values in any of the available fields.
6. After you have made all of your changes, choose **Update**.

AWS CLI & SDKs

You can retrieve, update, or delete the **primary** contact information by using the following AWS CLI commands or their AWS SDK equivalent operations:

- [GetContactInformation](#)

- [PutContactInformation](#)

Notes

- To perform these operations from the management account or a delegated admin account in an organization against member accounts, you must [enable trusted access for the Account service](#).
- You can't access an account in a different organization from the one you're using to call the operation.

Minimum permissions

For each operation, you must have the permission that maps to that operation:

- account:GetContactInformation
- account:PutContactInformation

If you use these individual permissions, you can grant some users the ability to only read the contact information, and grant others the ability to both read and write.

Example

The following example retrieves the current primary contact information for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account get-contact-information --account-id 123456789012
{
  "ContactInformation": {
    "AddressLine1": "123 Any Street",
    "City": "Seattle",
    "CompanyName": "Example Corp, Inc.",
    "CountryCode": "US",
    "DistrictOrCounty": "King",
    "FullName": "Saanvi Sarkar",
```

```
        "PhoneNumber": "+15555550100",
        "PostalCode": "98101",
        "StateOrRegion": "WA",
        "WebsiteUrl": "https://www.examplecorp.com"
    }
}
```

Example

The following example sets the primary contact information for the specified member account in an organization. The credentials used must be from either the organization's management account, or from the Account Management's delegated admin account.

```
$ aws account put-contact-information --account-id 123456789012 \
--contact-information '{"AddressLine1": "123 Any Street", "City": "Seattle",
"CompanyName": "Example Corp, Inc.", "CountryCode": "US", "DistrictOrCounty": "King",
"FullName": "Saanvi Sarkar", "PhoneNumber": "+15555550100", "PostalCode": "98101",
"StateOrRegion": "WA", "WebsiteUrl": "https://www.examplecorp.com"}'
```

This command produces no output if it's successful.

View AWS account identifiers

AWS assigns the following unique identifiers to each AWS account:

AWS account ID

A 12-digit number, such as 012345678901, that uniquely identifies an AWS account. Many AWS resources include the account ID in their [Amazon Resource Names \(ARNs\)](#). The account ID portion distinguishes resources in one account from the resources in another account. If you're an AWS Identity and Access Management (IAM) user, you can sign in to the AWS Management Console using either the account ID or account alias. While account IDs, like any identifying information, should be used and shared carefully, they are not considered secret, sensitive, or confidential information.

Canonical user ID

An alpha-numeric identifier, such as

79a59df900b949e55d96a1e698fbacedfd6e09d98eacf8f8d5218e7cd47ef2be, that is an

obfuscated form of the AWS account ID. You can use this ID to identify an AWS account when granting cross-account access to buckets and objects using Amazon Simple Storage Service (Amazon S3). You can retrieve the canonical user ID for your AWS account as either the [root user](#) or an IAM user.

You must be authenticated with AWS to view these identifiers.

Warning

Do not provide your AWS credentials (including passwords and access keys) to a third party that needs your AWS account identifiers to share AWS resources with you. Doing so would give them the same access to the AWS account that you have.

Find your AWS account ID

You can find the AWS account ID using either the AWS Management Console or the AWS Command Line Interface (AWS CLI). In the console, the location of the account ID depends on whether you're signed in as the root user or an IAM user. The account ID is the same whether you're signed in as the root user or an IAM user.

Finding your account ID as the root user

AWS Management Console

To find your AWS account ID when signed in as the root user

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- When you sign in as the root user, you don't need any IAM permissions.

1. In the navigation bar on the upper right, choose your account name or number and then choose **Security credentials**.

Tip

If you don't see the **Security credentials** option, you might be signed in as a federated user with an IAM role, instead of as an IAM user. In this case, look for the entry **Account** and the account ID number next to it.

2. Under the **Account details** section, the account number appears next to **AWS account ID**.

AWS CLI & SDKs

To find your AWS account ID using the AWS CLI

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- When you run the command as the root user, you don't need any IAM permissions.

Use the [get-caller-identity](#) command as follows.

```
$ aws sts get-caller-identity \
  --query Account \
  --output text
123456789012
```

Find your account ID as an IAM user

AWS Management Console

To find your AWS account ID when signed in as an IAM user

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- account:GetAccountInformation

1. In the navigation bar on the upper right, choose your user name and then choose **Security credentials**.

 **Tip**

If you don't see the **Security credentials** option, you might be signed in as a federated user with an IAM role, instead of as an IAM user. In this case, look for the entry **Account** and the account ID number next to it.

2. At the top of the page, under **Account details**, the account number appears next to **AWS account ID**.

AWS CLI & SDKs

To find your AWS account ID using the AWS CLI

 **Minimum permissions**

To perform the following steps, you must have at least the following IAM permissions:

- When you run the command as an IAM user or role, then you must have:
 - `sts:GetCallerIdentity`

Use the [get-caller-identity](#) command as follows.

```
$ aws sts get-caller-identity \
  --query Account \
  --output text
123456789012
```

Find the canonical user ID for your AWS account

You can find the canonical user ID for your AWS account using the AWS Management Console or the AWS CLI. The canonical user ID for an AWS account is specific to that account. You can retrieve the canonical user ID for your AWS account as the root user, a federated user, or an IAM user.

Find the canonical ID as the root user or IAM user

AWS Management Console

To find the canonical user ID for your account when signed in to the console as the root user or an IAM user

Minimum permissions

To perform the following steps, you must have at least the following IAM permissions:

- When you run the command as the root user, you don't need any IAM permissions.
- When you sign in as an IAM user, then you must have:
 - `account:GetAccountInformation`

1. Sign in to the AWS Management Console as the root user or an IAM user.
2. In the navigation bar on the upper right, choose your account name or number and then choose **Security credentials**.

Tip

If you don't see the **Security credentials** option, you might be signed in as a federated user with an IAM role, instead of as an IAM user. In this case, look for the entry **Account** and the account ID number next to it.

3. Under the **Account details** section, the canonical user ID appears next to **Canonical user ID**. You can use your canonical user ID to configure Amazon S3 access control lists (ACLs).

AWS CLI & SDKs

To find the canonical user ID using the AWS CLI

The same AWS CLI and API command works for the AWS account root user, IAM users, or IAM roles.

Use the [list-buckets](#) command as follows.

```
$ aws s3api list-buckets \
```

```
--max-items 10 \
--page-size 10 \
--query Owner.ID \
--output text
249fa2f1dc32c330EXAMPLE91b2778fcc65f980f9172f9cb9a5f50ccbEXAMPLE
```

Find the canonical ID as a federated user with an IAM role

AWS Management Console

To find the canonical ID for your account when signed in to the console as a federated user with an IAM role

Minimum permissions

- You must have permission to list and view an Amazon S3 bucket.

1. Sign in to the AWS Management Console as a federated user with an IAM role.
2. In the Amazon S3 console, choose a bucket name to view details about a bucket.
3. Choose the **Permissions** tab.
4. In the **Access control list** section, under **Bucket owner**, the canonical ID for your AWS account appears.

AWS CLI & SDKs

To find the canonical user ID using the AWS CLI

The same AWS CLI and API command works for the AWS account root user, IAM users, or IAM roles.

Use the [list-buckets](#) command as follows.

```
$ aws s3api list-buckets \
--max-items 10 \
--page-size 10 \
--query Owner.ID \
--output text
```

249fa2f1dc32c330EXAMPLE91b2778fcc65f980f9172f9cb9a5f50ccbEXAMPLE

Security in AWS Account Management

Cloud security at AWS is the highest priority. As an AWS customer, you benefit from a data center and network architecture that is built to meet the requirements of the most security-sensitive organizations.

Security is a shared responsibility between AWS and you. The [shared responsibility model](#) describes this as security of the cloud and security in the cloud:

- **Security of the cloud** – AWS is responsible for protecting the infrastructure that runs AWS services in the AWS Cloud. AWS also provides you with services that you can use securely. Third-party auditors regularly test and verify the effectiveness of our security as part of the [AWS Compliance Programs](#). To learn about the compliance programs that apply to Account Management, see [AWS services in scope by compliance program](#).
- **Security in the cloud** – Your responsibility is determined by the AWS service that you use. You are also responsible for other factors including the sensitivity of your data, your company's requirements, and applicable laws and regulations

This documentation helps you understand how to apply the shared responsibility model when using AWS Account Management. It shows you how to configure Account Management to meet your security and compliance objectives. You also learn how to use other AWS services that help you to monitor and secure your Account Management resources.

Topics

- [Data protection in AWS Account Management](#)
- [AWS PrivateLink for AWS Account Management](#)
- [Identity and Access Management for AWS Account Management](#)
- [AWS managed policies for AWS Account Management](#)
- [Compliance validation for AWS Account Management](#)
- [Resilience in AWS Account Management](#)
- [Infrastructure security in AWS Account Management](#)

Data protection in AWS Account Management

The AWS [shared responsibility model](#) applies to data protection in AWS Account Management. As described in this model, AWS is responsible for protecting the global infrastructure that runs all of the AWS Cloud. You are responsible for maintaining control over your content that is hosted on this infrastructure. You are also responsible for the security configuration and management tasks for the AWS services that you use. For more information about data privacy, see the [Data Privacy FAQ](#). For information about data protection in Europe, see the [AWS Shared Responsibility Model and GDPR](#) blog post on the [AWS Security Blog](#).

For data protection purposes, we recommend that you protect AWS account credentials and set up individual users with AWS IAM Identity Center or AWS Identity and Access Management (IAM). That way, each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with AWS resources. We require TLS 1.2 and recommend TLS 1.3.
- Set up API and user activity logging with AWS CloudTrail. For information about using CloudTrail trails to capture AWS activities, see [Working with CloudTrail trails](#) in the *AWS CloudTrail User Guide*.
- Use AWS encryption solutions, along with all default security controls within AWS services.
- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing sensitive data that is stored in Amazon S3.
- If you require FIPS 140-3 validated cryptographic modules when accessing AWS through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see [Federal Information Processing Standard \(FIPS\) 140-3](#).

We strongly recommend that you never put confidential or sensitive information, such as your customers' email addresses, into tags or free-form text fields such as a **Name** field. This includes when you work with Account Management or other AWS services using the console, API, AWS CLI, or AWS SDKs. Any data that you enter into tags or free-form text fields used for names may be used for billing or diagnostic logs. If you provide a URL to an external server, we strongly recommend that you do not include credentials information in the URL to validate your request to that server.

AWS PrivateLink for AWS Account Management

If you use Amazon Virtual Private Cloud (Amazon VPC) to host your AWS resources, you can access the AWS Account Management service from within the VPC without having to cross the public internet.

Amazon VPC lets you launch AWS resources in a custom virtual network. You can use a VPC to control your network settings, such as the IP address range, subnets, route tables, and network gateways. For more information about VPCs, see the [Amazon VPC User Guide](#).

To connect your Amazon VPC to Account Management, you must first define an *interface VPC endpoint*, which lets you connect your VPC to other AWS services. The endpoint provides reliable, scalable connectivity, without requiring an internet gateway, network address translation (NAT) instance, or VPN connection. For more information, see [Interface VPC Endpoints \(AWS PrivateLink\)](#) in the *Amazon VPC User Guide*.

Creating the Endpoint

You can create an AWS Account Management endpoint in your VPC using the AWS Management Console, the AWS Command Line Interface (AWS CLI), an AWS SDK, the AWS Account Management API, or CloudFormation.

For information about creating and configuring an endpoint using the Amazon VPC console or the AWS CLI, see [Creating an Interface Endpoint](#) in the *Amazon VPC User Guide*.

Note

When you create an endpoint, specify Account Management as the service that you want your VPC to connect to, using the following format:

```
com.amazonaws.us-east-1.account
```

You must use the string exactly as shown, specifying the us-east-1 Region. As a global service, Account Management is hosted in only that one AWS Region.

For information about creating and configuring an endpoint using CloudFormation, see the [AWS::EC2::VPCEndpoint](#) resource in the *CloudFormation User Guide*.

Amazon VPC Endpoint Policies

You can control what actions can be performed through this service endpoint by attaching an endpoint policy when you create the Amazon VPC endpoint. You can create complex IAM rules by attaching multiple endpoint policies. For more information, see:

- [Amazon Virtual Private Cloud endpoint policies for Account Management](#)
- [Controlling Access to Services with VPC Endpoints](#) in the *AWS PrivateLink Guide*.

Amazon Virtual Private Cloud endpoint policies for Account Management

You can create a Amazon VPC endpoint policy for Account Management in which you specify the following:

- The principal that can perform actions.
- The actions that the principals can perform.
- The resources on which the actions can be performed.

The following example shows an Amazon VPC endpoint policy that allows one IAM user named Alice in account 123456789012 to both retrieve and change the alternate contact information for any AWS account, but denies all IAM users permission to delete any alternate contact information on any account.

If you want to grant access to accounts that are part of an AWS Organization to a principal that is in one of the organization's member accounts, then the `Resource` element must use the following format:

```
arn:aws:account::{ManagementAccountId}:account/o-{OrganizationId}/{AccountId}
```

For more information about creating endpoint policies, see [Controlling Access to Services with VPC Endpoints](#) in the *AWS PrivateLink Guide*.

Identity and Access Management for AWS Account Management

AWS Identity and Access Management (IAM) is an AWS service that helps an administrator securely control access to AWS resources. IAM administrators control who can be *authenticated* (signed in) and *authorized* (have permissions) to use Account Management resources. IAM is an AWS service that you can use with no additional charge.

Topics

- [Audience](#)
- [Authenticating with identities](#)
- [Managing access using policies](#)
- [How AWS Account Management works with IAM](#)
- [Identity-based policy examples for AWS Account Management](#)
- [Using identity-based policies \(IAM policies\) for AWS Account Management](#)
- [Troubleshooting AWS Account Management identity and access](#)

Audience

How you use AWS Identity and Access Management (IAM) differs based on your role:

- **Service user** - request permissions from your administrator if you cannot access features (see [Troubleshooting AWS Account Management identity and access](#))
- **Service administrator** - determine user access and submit permission requests (see [How AWS Account Management works with IAM](#))
- **IAM administrator** - write policies to manage access (see [Identity-based policy examples for AWS Account Management](#))

Authenticating with identities

Authentication is how you sign in to AWS using your identity credentials. You must be authenticated as the AWS account root user, an IAM user, or by assuming an IAM role.

You can sign in as a federated identity using credentials from an identity source like AWS IAM Identity Center (IAM Identity Center), single sign-on authentication, or Google/Facebook

credentials. For more information about signing in, see [How to sign in to your AWS account](#) in the [AWS Sign-In User Guide](#).

For programmatic access, AWS provides an SDK and CLI to cryptographically sign requests. For more information, see [AWS Signature Version 4 for API requests](#) in the [IAM User Guide](#).

AWS account root user

When you create an AWS account, you begin with one sign-in identity called the AWS account *root user* that has complete access to all AWS services and resources. We strongly recommend that you don't use the root user for everyday tasks. For tasks that require root user credentials, see [Tasks that require root user credentials](#) in the [IAM User Guide](#).

Federated identity

As a best practice, require human users to use federation with an identity provider to access AWS services using temporary credentials.

A *federated identity* is a user from your enterprise directory, web identity provider, or Directory Service that accesses AWS services using credentials from an identity source. Federated identities assume roles that provide temporary credentials.

For centralized access management, we recommend AWS IAM Identity Center. For more information, see [What is IAM Identity Center?](#) in the [AWS IAM Identity Center User Guide](#).

IAM users and groups

An [IAM user](#) is an identity with specific permissions for a single person or application. We recommend using temporary credentials instead of IAM users with long-term credentials. For more information, see [Require human users to use federation with an identity provider to access AWS using temporary credentials](#) in the [IAM User Guide](#).

An [IAM group](#) specifies a collection of IAM users and makes permissions easier to manage for large sets of users. For more information, see [Use cases for IAM users](#) in the [IAM User Guide](#).

IAM roles

An [IAM role](#) is an identity with specific permissions that provides temporary credentials. You can assume a role by [switching from a user to an IAM role \(console\)](#) or by calling an AWS CLI or AWS API operation. For more information, see [Methods to assume a role](#) in the [IAM User Guide](#).

IAM roles are useful for federated user access, temporary IAM user permissions, cross-account access, cross-service access, and applications running on Amazon EC2. For more information, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

Managing access using policies

You control access in AWS by creating policies and attaching them to AWS identities or resources. A policy defines permissions when associated with an identity or resource. AWS evaluates these policies when a principal makes a request. Most policies are stored in AWS as JSON documents. For more information about JSON policy documents, see [Overview of JSON policies](#) in the *IAM User Guide*.

Using policies, administrators specify who has access to what by defining which **principal** can perform **actions** on what **resources**, and under what **conditions**.

By default, users and roles have no permissions. An IAM administrator creates IAM policies and adds them to roles, which users can then assume. IAM policies define permissions regardless of the method used to perform the operation.

Identity-based policies

Identity-based policies are JSON permissions policy documents that you attach to an identity (user, group, or role). These policies control what actions identities can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see [Define custom IAM permissions with customer managed policies](#) in the *IAM User Guide*.

Identity-based policies can be *inline policies* (embedded directly into a single identity) or *managed policies* (standalone policies attached to multiple identities). To learn how to choose between managed and inline policies, see [Choose between managed policies and inline policies](#) in the *IAM User Guide*.

Resource-based policies

Resource-based policies are JSON policy documents that you attach to a resource. Examples include IAM *role trust policies* and Amazon S3 *bucket policies*. In services that support resource-based policies, service administrators can use them to control access to a specific resource. You must [specify a principal](#) in a resource-based policy.

Resource-based policies are inline policies that are located in that service. You can't use AWS managed policies from IAM in a resource-based policy.

Other policy types

AWS supports additional policy types that can set the maximum permissions granted by more common policy types:

- **Permissions boundaries** – Set the maximum permissions that an identity-based policy can grant to an IAM entity. For more information, see [Permissions boundaries for IAM entities](#) in the *IAM User Guide*.
- **Service control policies (SCPs)** – Specify the maximum permissions for an organization or organizational unit in AWS Organizations. For more information, see [Service control policies](#) in the *AWS Organizations User Guide*.
- **Resource control policies (RCPs)** – Set the maximum available permissions for resources in your accounts. For more information, see [Resource control policies \(RCPs\)](#) in the *AWS Organizations User Guide*.
- **Session policies** – Advanced policies passed as a parameter when creating a temporary session for a role or federated user. For more information, see [Session policies](#) in the *IAM User Guide*.

Multiple policy types

When multiple types of policies apply to a request, the resulting permissions are more complicated to understand. To learn how AWS determines whether to allow a request when multiple policy types are involved, see [Policy evaluation logic](#) in the *IAM User Guide*.

How AWS Account Management works with IAM

Before you use IAM to manage access to Account Management, learn what IAM features are available to use with Account Management.

IAM features you can use with AWS Account Management

IAM feature	Account Management support
Identity-based policies	Yes
Resource-based policies	No
Policy actions	Yes

IAM feature	Account Management support
Policy resources	Yes
Policy condition keys	Yes
ACLs	No
ABAC (tags in policies)	No
Temporary credentials	Yes
Principal permissions	Yes
Service roles	No
Service-linked roles	No

To get a high-level view of how Account Management and other AWS services work with most IAM features, see [AWS services that work with IAM](#) in the *IAM User Guide*.

Identity-based policies for Account Management

Supports identity-based policies: Yes

Identity-based policies are JSON permissions policy documents that you can attach to an identity, such as an IAM user, group of users, or role. These policies control what actions users and roles can perform, on which resources, and under what conditions. To learn how to create an identity-based policy, see [Define custom IAM permissions with customer managed policies](#) in the *IAM User Guide*.

With IAM identity-based policies, you can specify allowed or denied actions and resources as well as the conditions under which actions are allowed or denied. To learn about all of the elements that you can use in a JSON policy, see [IAM JSON policy elements reference](#) in the *IAM User Guide*.

Identity-based policy examples for Account Management

To view examples of Account Management identity-based policies, see [Identity-based policy examples for AWS Account Management](#).

Resource-based policies within Account Management

Supports resource-based policies: No

Resource-based policies are JSON policy documents that you attach to a resource. Examples of resource-based policies are IAM *role trust policies* and Amazon S3 *bucket policies*. In services that support resource-based policies, service administrators can use them to control access to a specific resource. For the resource where the policy is attached, the policy defines what actions a specified principal can perform on that resource and under what conditions. You must [specify a principal](#) in a resource-based policy. Principals can include accounts, users, roles, federated users, or AWS services.

To enable cross-account access, you can specify an entire account or IAM entities in another account as the principal in a resource-based policy. For more information, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

Policy actions for Account Management

Supports policy actions: Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Action element of a JSON policy describes the actions that you can use to allow or deny access in a policy. Include actions in a policy to grant permissions to perform the associated operation.

To see a list of Account Management actions, see [Actions defined by AWS Account Management](#) in the *Service Authorization Reference*.

Policy actions in Account Management use the following prefix before the action.

account

To specify multiple actions in a single statement, separate them with commas.

```
"Action": [
    "account:action1",
    "account:action2"
]
```

You can specify multiple actions using wildcards (*). For example, to specify all actions that work with an AWS account's alternate contacts, include the following action.

```
"Action": "account:*AlternateContact"
```

To view examples of Account Management identity-based policies, see [Identity-based policy examples for AWS Account Management](#).

Policy resources for Account Management

Supports policy resources: Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Resource JSON policy element specifies the object or objects to which the action applies. As a best practice, specify a resource using its [Amazon Resource Name \(ARN\)](#). For actions that don't support resource-level permissions, use a wildcard (*) to indicate that the statement applies to all resources.

```
"Resource": "*"
```

The Account Management service supports the following specific resource types in an IAM policy's Resources element to help you filter the policy and distinguish between these types of AWS accounts:

- **account**

This resource type matches only standalone AWS accounts that are not member accounts in an organization managed by the AWS Organizations service.

- **accountInOrganization**

This resource type matches only AWS accounts that are member accounts in an organization managed by the AWS Organizations service.

To see a list of Account Management resource types and their ARNs, see [Resources defined by AWS Account Management](#) in the *Service Authorization Reference*. To learn with which actions you can specify the ARN of each resource, see [Actions defined by AWS Account Management](#).

To view examples of Account Management identity-based policies, see [Identity-based policy examples for AWS Account Management](#).

Policy condition keys for Account Management

Supports service-specific policy condition keys: Yes

Administrators can use AWS JSON policies to specify who has access to what. That is, which **principal** can perform **actions** on what **resources**, and under what **conditions**.

The Condition element specifies when statements execute based on defined criteria. You can create conditional expressions that use [condition operators](#), such as equals or less than, to match the condition in the policy with values in the request. To see all AWS global condition keys, see [AWS global condition context keys](#) in the *IAM User Guide*.

The Account Management service supports the following condition keys that you can use to provide fine-grained filtering for your IAM policies:

- **account:TargetRegion**

This condition key takes an argument that consists of a list of [AWS Region codes](#). It lets you filter the policy to affect only those actions that apply to the specified Regions.

- **account:AlternateContactTypes**

This condition key takes a list of alternate contact types:

- BILLING
- OPERATIONS
- SECURITY

Using this key lets you filter the request to only those actions that target the specified alternate contact types.

- **account:AccountResourceOrgPaths**

This condition key takes an argument that consists of a list of paths through your organization's hierarchy to specific organizational units (OU). It lets you filter the policy to affect only target accounts in a matching OU.

*o-aa111bb222/r-a1b2/ou-a1b2-f6g7h111/**

- **account:AccountResourceOrgTags**

This condition key takes an argument that consists of a list of tag keys and values. It lets you filter the policy to affect only those accounts that are members of an organization and that are tagged with the specified tag keys and values.

- **account:EmailTargetDomain**

This condition key takes an argument that consists of a list of email domains. It lets you filter the policy to affect only those actions that match the specified email domains. This condition key is case-insensitive. You should use `StringEqualsIgnoreCase` instead of `StringEquals` in the condition block of the policy to control the action based on the target email address domain. Here is a sample policy allowing the `account:StartPrimaryEmailUpdate` action to complete when the email domain contains `example.com`, `company.org`, or any combination of case, such as `EXAMPLE.COM`.

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Sid": "AllowConditionKey",  
            "Effect": "Allow",  
            "Action": [  
                "account:StartPrimaryEmailUpdate"  
            ],  
            "Resource": "*",  
            "Condition": {  
                "StringEqualsIgnoreCase": {  
                    "account:EmailTargetDomain": [  
                        "example.com",  
                        "company.org"  
                    ]  
                }  
            }  
        }  
    ]  
}
```

To see a list of Account Management condition keys, see [Condition keys for AWS Account Management](#) in the *Service Authorization Reference*. To learn with which actions and resources you can use a condition key, see [Actions defined by AWS Account Management](#).

To view examples of Account Management identity-based policies, see [Identity-based policy examples for AWS Account Management](#).

Access control lists in Account Management

Supports ACLs: No

Access control lists (ACLs) control which principals (account members, users, or roles) have permissions to access a resource. ACLs are similar to resource-based policies, although they do not use the JSON policy document format.

Attribute-based access control with Account Management

Supports ABAC (tags in policies): No

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. In AWS, these attributes are called *tags*. You can attach tags to IAM entities (users or roles) and to many AWS resources. Tagging entities and resources is the first step of ABAC. Then you design ABAC policies to allow operations when the principal's tag matches the tag on the resource that they are trying to access.

ABAC is helpful in environments that are growing rapidly and helps with situations where policy management becomes cumbersome.

For AWS Account Management, tag-based access control is supported only through the account :AccountResourceOrgTags/key-name condition key. The standard aws:ResourceTag/key-name condition key is not supported for APIs in the account namespace.

Example JSON policy using the supported condition key

The following example policy allows access to view contact information for accounts tagged with the key "CostCenter" and either value "12345" or "67890" in your organization.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Principal": "*"  
    }  
  ]  
}
```

```
  "Action": [
    "account:GetContactInformation",
    "account:GetAlternateContact"
  ],
  "Resource": "*",
  "Condition": {
    "ForAnyValue:StringEquals": {
      "account:AccountResourceOrgTags/CostCenter": [
        "12345",
        "67890"
      ]
    }
  }
}
```

For more information about ABAC, see [Define permissions based on attributes with ABAC authorization](#) and [IAM tutorial: Define permissions to access AWS resources based on tags](#) in the *IAM User Guide*.

Using temporary credentials with Account Management

Supports temporary credentials: Yes

Temporary credentials provide short-term access to AWS resources and are automatically created when you use federation or switch roles. AWS recommends that you dynamically generate temporary credentials instead of using long-term access keys. For more information, see [Temporary security credentials in IAM](#) and [AWS services that work with IAM](#) in the *IAM User Guide*.

Cross-service principal permissions for Account Management

Supports forward access sessions (FAS): Yes

Forward access sessions (FAS) use the permissions of the principal calling an AWS service, combined with the requesting AWS service to make requests to downstream services. For policy details when making FAS requests, see [Forward access sessions](#).

Service roles for Account Management

Supports service roles: No

A service role is an [IAM role](#) that a service assumes to perform actions on your behalf. An IAM administrator can create, modify, and delete a service role from within IAM. For more information, see [Create a role to delegate permissions to an AWS service](#) in the *IAM User Guide*.

Service-linked roles for Account Management

Supports service-linked roles: No

A service-linked role is a type of service role that is linked to an AWS service. The service can assume the role to perform an action on your behalf. Service-linked roles appear in your AWS account and are owned by the service. An IAM administrator can view, but not edit the permissions for service-linked roles.

For details about creating or managing service-linked roles, see [AWS services that work with IAM](#). Find a service in the table that includes a Yes in the **Service-linked role** column. Choose the **Yes** link to view the service-linked role documentation for that service.

Identity-based policy examples for AWS Account Management

By default, users and roles don't have permission to create or modify Account Management resources. To grant users permission to perform actions on the resources that they need, an IAM administrator can create IAM policies.

To learn how to create an IAM identity-based policy by using these example JSON policy documents, see [Create IAM policies \(console\)](#) in the *IAM User Guide*.

For details about actions and resource types defined by Account Management, including the format of the ARNs for each of the resource types, see [Actions, resources, and condition keys for AWS Account Management](#) in the *Service Authorization Reference*.

Topics

- [Policy best practices](#)
- [Using the Account page in the AWS Management Console](#)
- [Providing read-only access to the Account page in the AWS Management Console](#)
- [Providing full access to the Account page in the AWS Management Console](#)

Policy best practices

Identity-based policies determine whether someone can create, access, or delete Account Management resources in your account. These actions can incur costs for your AWS account. When you create or edit identity-based policies, follow these guidelines and recommendations:

- **Get started with AWS managed policies and move toward least-privilege permissions** – To get started granting permissions to your users and workloads, use the *AWS managed policies* that grant permissions for many common use cases. They are available in your AWS account. We recommend that you reduce permissions further by defining AWS customer managed policies that are specific to your use cases. For more information, see [AWS managed policies](#) or [AWS managed policies for job functions](#) in the *IAM User Guide*.
- **Apply least-privilege permissions** – When you set permissions with IAM policies, grant only the permissions required to perform a task. You do this by defining the actions that can be taken on specific resources under specific conditions, also known as *least-privilege permissions*. For more information about using IAM to apply permissions, see [Policies and permissions in IAM](#) in the *IAM User Guide*.
- **Use conditions in IAM policies to further restrict access** – You can add a condition to your policies to limit access to actions and resources. For example, you can write a policy condition to specify that all requests must be sent using SSL. You can also use conditions to grant access to service actions if they are used through a specific AWS service, such as CloudFormation. For more information, see [IAM JSON policy elements: Condition](#) in the *IAM User Guide*.
- **Use IAM Access Analyzer to validate your IAM policies to ensure secure and functional permissions** – IAM Access Analyzer validates new and existing policies so that the policies adhere to the IAM policy language (JSON) and IAM best practices. IAM Access Analyzer provides more than 100 policy checks and actionable recommendations to help you author secure and functional policies. For more information, see [Validate policies with IAM Access Analyzer](#) in the *IAM User Guide*.
- **Require multi-factor authentication (MFA)** – If you have a scenario that requires IAM users or a root user in your AWS account, turn on MFA for additional security. To require MFA when API operations are called, add MFA conditions to your policies. For more information, see [Secure API access with MFA](#) in the *IAM User Guide*.

For more information about best practices in IAM, see [Security best practices in IAM](#) in the *IAM User Guide*.

Using the Account page in the AWS Management Console

To access the [Account page](#) in the AWS Management Console, you must have a minimum set of permissions. These permissions must allow you to list and view details about your AWS account. If you create an identity-based policy that is more restrictive than the minimum required permissions, the console won't function as intended for entities (IAM users or roles) with that policy.

To ensure that users and roles can use the Account Management console, you can choose to attach either the `AWSAccountManagementReadOnlyAccess` or `AWSAccountManagementFullAccess` AWS managed policy to the entities. For more information, see [Adding permissions to a user](#) in the *IAM User Guide*.

You don't need to allow minimum console permissions for users that are making calls only to the AWS CLI or the AWS API. Instead, in many cases you can choose to allow access to only the actions that match the API operations that you're trying to perform.

Providing read-only access to the Account page in the AWS Management Console

In the following example, you want to grant an IAM user in your AWS account read-only access to the Account page in the AWS Management Console. Users with this policy attached can't make any changes.

The `account:GetAccountInformation` action grants access to view most of the settings on the Account page. However, to view the currently enabled AWS Regions, you must also include the `account>ListRegions` action.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "GrantReadOnlyAccessToAccountSettings",  
      "Effect": "Allow",  
      "Action": [  
        "account:GetAccountInformation",  
        "account>ListRegions"  
      ],  
      "Resource": "*"  
    }  
  ]}
```

{

Providing full access to the Account page in the AWS Management Console

In the following example, you want to grant an IAM user in your AWS account full access to the Account page in the AWS Management Console. Users with this policy attached can alter settings for the account.

This example policy builds on the preceding example policy by adding each of the available write permissions (with the exception of CloseAccount), which allows the user to change most of the settings for the account, including the account:EnableRegion and account:DisableRegion permissions.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Sid": "GrantFullAccessToAccountSettings",  
      "Effect": "Allow",  
      "Action": [  
        "account:GetAccountInformation",  
        "account>ListRegions",  
        "account:PutContactInformation",  
        "account:PutAlternateContact",  
        "account>DeleteAlternateContact",  
        "account:EnableRegion",  
        "account:DisableRegion"  
      ],  
      "Resource": "*"  
    }  
  ]  
}
```

Using identity-based policies (IAM policies) for AWS Account Management

For a full discussion of AWS accounts and IAM users, see [What Is IAM?](#) in the *IAM User Guide*.

For instructions on how you can update customer managed policies, see [Edit IAM policies](#) in the [IAM User Guide](#).

AWS Account Management actions policies

This table summarizes the permissions that grant access to your account settings. For examples of policies that use these permissions, see [Identity-based policy examples for AWS Account Management](#).

 **Note**

To grant IAM users write access to a specific account setting in the [Account](#) page of the AWS Management Console, you must allow the `GetAccountInformation` permission, in addition to the permission (or permissions) that you want to use to modify that setting.

Permission name	Access level	Description
<code>account>ListRegions</code>	List	Grants permission to list the available Regions.
<code>account>GetAccountInformation</code>	Read	Grants permission to retrieve the account information for an account.
<code>account>GetAlternateContact</code>	Read	Grants permission to retrieve the alternate contacts for an account.
<code>account>GetContactInformation</code>	Read	Grants permission to retrieve the primary contact information for an account.
<code>account>GetPrimaryEmail</code>	Read	Grants permission to retrieve the primary email address of an account.
<code>account>GetRegionOptStatus</code>	Read	Grants permission to get the opt-in status of a Region.

Permission name	Access level	Description
account:AcceptPrimaryEmailUpdate	Write	Grants permission to accept the primary email address update of the member account in an AWS organization.
account:CloseAccount	Write	Grants permission to close an account. <div style="border: 1px solid #ccc; padding: 10px; border-radius: 10px; margin-top: 10px;"> i Note This is a permission for the console only. No API access is available for this permission. </div>
account:DeleteAlternateContact	Write	Grants permission to delete the alternate contacts for an account.
account:DisableRegion	Write	Grants permission to disable use of a Region.
account:EnableRegion	Write	Grants permission to enable use of a Region.
account:PutAccountName	Write	Grants permission to update the name for an account.
account:PutAlternateContact	Write	Grants permission to modify the alternate contacts for an account.

Permission name	Access level	Description
account:PutContactInformation	Write	Grants permission to update the primary contact information for an account.
account:StartPrimaryEmailUpdate	Write	Grants permission to initiate the primary email address update of the member account in an AWS organization.

Troubleshooting AWS Account Management identity and access

Use the following information to help you diagnose and fix common issues that you might encounter when working with Account Management and IAM.

Topics

- [I am not authorized to perform an action in the Account page](#)
- [I am not authorized to perform iam:PassRole](#)
- [I want to allow people outside of my AWS account to access my account details](#)

I am not authorized to perform an action in the Account page

If the AWS Management Console tells you that you're not authorized to perform an action, then you must contact your administrator for assistance. Your administrator is the person that provided you with your user name and password.

The following example error occurs when the mateojackson IAM user tries to use the console to view details about his AWS account in the **Account** page of the AWS Management Console but doesn't have the account:GetAccountInformation permissions.

 You Need Permissions

You don't have permission to access billing information for this account. Contact your AWS administrator if you need help. If you are an AWS administrator, you can provide permissions for your users or groups by making sure that (1) [this account allows IAM and federated users to access billing information](#) and (2) [you have the required IAM permissions](#).

In this case, Mateo asks his administrator to update his policies to allow him to access the *my-example-widget* resource using the account: *GetWidget* action.

I am not authorized to perform `iam:PassRole`

If you receive an error that you're not authorized to perform the `iam:PassRole` action, your policies must be updated to allow you to pass a role to Account Management.

Some AWS services allow you to pass an existing role to that service instead of creating a new service role or service-linked role. To do this, you must have permissions to pass the role to the service.

The following example error occurs when an IAM user named `marymajor` tries to use the console to perform an action in Account Management. However, the action requires the service to have permissions that are granted by a service role. Mary does not have permissions to pass the role to the service.

```
User: arn:aws:iam::123456789012:user/marymajor is not authorized to perform:  
  iam:PassRole
```

In this case, Mary's policies must be updated to allow her to perform the `iam:PassRole` action.

If you need help, contact your AWS administrator. Your administrator is the person who provided you with your sign-in credentials.

I want to allow people outside of my AWS account to access my account details

You can create a role that users in other accounts or people outside of your organization can use to access your resources. You can specify who is trusted to assume the role. For services that support resource-based policies or access control lists (ACLs), you can use those policies to grant people access to your resources.

To learn more, consult the following:

- To learn whether Account Management supports these features, see [How AWS Account Management works with IAM](#).
- To learn how to provide access to your resources across AWS accounts that you own, see [Providing access to an IAM user in another AWS account that you own](#) in the *IAM User Guide*.
- To learn how to provide access to your resources to third-party AWS accounts, see [Providing access to AWS accounts owned by third parties](#) in the *IAM User Guide*.

- To learn how to provide access through identity federation, see [Providing access to externally authenticated users \(identity federation\)](#) in the *IAM User Guide*.
- To learn the difference between using roles and resource-based policies for cross-account access, see [Cross account resource access in IAM](#) in the *IAM User Guide*.

AWS managed policies for AWS Account Management

AWS Account Management currently provides two AWS managed policies that are available for your use:

- [AWS managed policy: AWSAccountManagementReadOnlyAccess](#)
- [AWS managed policy: AWSAccountManagementFullAccess](#)
- [Account Management updates to AWS managed policies](#)

An AWS managed policy is a standalone policy that is created and administered by AWS. AWS managed policies are designed to provide permissions for many common use cases so that you can start assigning permissions to users, groups, and roles.

Keep in mind that AWS managed policies might not grant least-privilege permissions for your specific use cases because they're available for all AWS customers to use. We recommend that you reduce permissions further by defining [customer managed policies](#) that are specific to your use cases.

You cannot change the permissions defined in AWS managed policies. If AWS updates the permissions defined in an AWS managed policy, the update affects all principal identities (users, groups, and roles) that the policy is attached to. AWS is most likely to update an AWS managed policy when a new AWS service is launched or new API operations become available for existing services.

For more information, see [AWS managed policies](#) in the *IAM User Guide*.

AWS managed policy: AWSAccountManagementReadOnlyAccess

You can attach the AWSAccountManagementReadOnlyAccess policy to your IAM identities.

This policy provides read-only permissions to only view the following:

- The metadata about your AWS accounts

- The AWS Regions that are enabled or disabled for the AWS account (you can view status of Regions in your account only by using the AWS console)

It does this by granting permission to run any of the Get* or List* operations. It doesn't provide any ability to modify the account metadata or enable or disable AWS Regions for the account.

Permissions details

This policy includes the following permissions.

- account – Allows principals to retrieve the metadata information about AWS accounts. It also allows principals to list the AWS Regions that are enabled for the account in the AWS Management Console.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "account:Get*",  
        "account>List*"  
      ],  
      "Resource": "*"  
    }  
  ]  
}
```

AWS managed policy: AWSAccountManagementFullAccess

You can attach the AWSAccountManagementFullAccess policy to your IAM identities.

This policy provides full administrative access to view or modify the following:

- The metadata about your AWS accounts
- The AWS Regions that are enabled or disabled for the AWS account (you can view status or enable or disable Regions for your account only by using the AWS console)

It does this by granting permission to run any account operations.

Permissions details

This policy includes the following permissions.

- account – Allows principals to view or modify the metadata information about AWS accounts. It also allows principals to list the AWS Regions that are enabled for the account and enable or disable them in the AWS Management Console.

JSON

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": "account:*",  
      "Resource": "*"  
    }  
  ]  
}
```

Account Management updates to AWS managed policies

View details about updates to AWS managed policies for Account Management since this service began tracking these changes. For automatic alerts about changes to this page, subscribe to the RSS feed on the Account Management Document history page.

Change	Description	Date
AWS Account Management launched with new AWS managed policies and started tracking changes	Account Management initially launched with the following AWS managed policies: <ul style="list-style-type: none">• AWSAccountManagementReadOnlyAccess	Sept 30, 2021

Change	Description	Date
	<ul style="list-style-type: none">• AWSAccountManagementFullAccess	

Compliance validation for AWS Account Management

Third-party auditors assess the security and compliance of AWS services that can run in your AWS account as part of multiple AWS compliance programs. These include SOC, PCI, FedRAMP, HIPAA, and others.

For a list of AWS services in scope of specific compliance programs, see [AWS services in scope by compliance program](#). For general information, see [AWS Compliance Programs](#).

You can download third-party audit reports using AWS Artifact. For more information, see [Downloading Reports in AWS Artifact](#) in the *AWS Artifact User Guide*.

Your compliance responsibility when using services in your AWS account is determined by the sensitivity of your data, your company's compliance objectives, and applicable laws and regulations. AWS provides the following resources to help with compliance:

- [Security and Compliance Quick Start Guides](#) – These deployment guides discuss architectural considerations and provide steps for deploying baseline environments on AWS that are security and compliance focused.
- [Architecting for HIPAA Security and Compliance on Amazon Web Services](#) – This whitepaper describes how companies can use AWS to create HIPAA-eligible applications.

 **Note**

Not all AWS services are HIPAA eligible. For more information, see the [HIPAA Eligible Services Reference](#).

- [AWS Compliance Resources](#) – This collection of workbooks and guides might apply to your industry and location.
- [Evaluating Resources with Rules](#) in the *AWS Config Developer Guide* – The AWS Config service assesses how well your resource configurations comply with internal practices, industry guidelines, and regulations.

- [AWS Security Hub CSPM](#) – This AWS service provides a comprehensive view of your security state within AWS that helps you check your compliance with security industry standards and best practices.
- [AWS Audit Manager](#) – This AWS service helps you continuously audit your AWS usage to simplify how you manage risk and compliance with regulations and industry standards.

Resilience in AWS Account Management

The AWS global infrastructure is built around AWS Regions and Availability Zones. Regions provide multiple physically separated and isolated Availability Zones, which are connected through low-latency, high-throughput, and highly redundant networking. With Availability Zones, you can design and operate applications and databases that automatically fail over between zones without interruption. Availability Zones are more highly available, fault tolerant, and scalable than traditional single or multiple data center infrastructures.

For more information about AWS Regions and Availability Zones, see [AWS Global Infrastructure](#).

Infrastructure security in AWS Account Management

As managed services, AWS services running in your AWS account are protected by the AWS global network security. For information about AWS security services and how AWS protects infrastructure, see [AWS Cloud Security](#). To design your AWS environment using the best practices for infrastructure security, see [Infrastructure Protection](#) in *Security Pillar AWS Well-Architected Framework*.

You use AWS published API calls to access account settings through the network. Clients must support the following:

- Transport Layer Security (TLS). We require TLS 1.2 and recommend TLS 1.3.
- Cipher suites with perfect forward secrecy (PFS) such as DHE (Ephemeral Diffie-Hellman) or ECDHE (Elliptic Curve Ephemeral Diffie-Hellman). Most modern systems such as Java 7 and later support these modes.

Additionally, requests must be signed by using an access key ID and a secret access key that is associated with an IAM principal. Or you can use the [AWS Security Token Service](#) (AWS STS) to generate temporary security credentials to sign requests.

Monitor your AWS account

Monitoring is an important part of maintaining the reliability, availability, and performance of AWS Account Management and your other AWS solutions. AWS provides the following monitoring tools to watch Account Management, report when something is wrong, and take automatic actions when appropriate:

- *AWS CloudTrail* captures (logs) API calls and related events made by or on behalf of your AWS account and writes the log files to an Amazon Simple Storage Service (Amazon S3) bucket that you specify. This lets you identify which users and accounts called AWS, the source IP address from which the calls were made, and when the calls occurred. For more information, see the [AWS CloudTrail User Guide](#).
- *Amazon EventBridge* adds additional automation to your AWS services by responding automatically to system events, such as application availability issues or resource changes. Events from AWS services are delivered to EventBridge in near real time. You can write simple rules to indicate which events are of interest to you and which automated actions to take when an event matches a rule. For more information, see the [Amazon EventBridge User Guide](#).

Logging AWS Account Management API calls using AWS CloudTrail

The AWS Account Management APIs are integrated with AWS CloudTrail, a service that provides a record of actions taken by a user, role, or an AWS service that calls an Account Management operation. CloudTrail captures all Account Management API calls as events. The calls captured include all calls to the Account Management operations. If you create a trail, you can turn on continuous delivery of CloudTrail events to an Amazon S3 bucket, including events for Account Management operations. If you don't configure a trail, you can still view the most recent events in the CloudTrail console in **Event history**. Using the information collected by CloudTrail, you can determine the request that called an Account Management operation, the IP address used to make the request, who made the request and when, and additional details.

To learn more about CloudTrail, see the [AWS CloudTrail User Guide](#).

Account Management information in CloudTrail

CloudTrail is turned on in your AWS account when you create the account. When activity occurs with an Account Management operation, CloudTrail records that activity in a CloudTrail event along with other AWS service events in **Event history**. You can view, search, and download recent events in your AWS account. For more information, see [Viewing Events with CloudTrail Event History](#).

For an ongoing record of events in your AWS account, including events for Account Management operations, create a trail. A *trail* enables CloudTrail to deliver log files to an Amazon S3 bucket. By default, when you create a trail in the AWS Management Console, the trail applies to all AWS Regions. The trail logs events from all Regions in the AWS partition and delivers the log files to the Amazon S3 bucket that you specify. You can configure other AWS services to further analyze and act upon the event data collected in CloudTrail logs. For more information, see the following:

- [Overview for creating a trail](#)
- [CloudTrail supported services and integrations](#)
- [Configuring Amazon SNS notifications for CloudTrail](#)
- [Receiving CloudTrail log files from multiple Regions](#)
- [Receiving CloudTrail log files from multiple accounts](#)

AWS CloudTrail logs all Account Management API operations found in the [API Reference](#) section of this guide. For example, calls to the `CreateAccount`, `DeleteAlternateContact`, and `PutAlternateContact` operations generate entries in the CloudTrail log files.

Every event or log entry contains information about who generated the request. The identity information helps you determine the following:

- Whether the request was made with root user or AWS Identity and Access Management (IAM) user credentials
- Whether the request was made with temporary security credentials for an IAM role or federated user
- Whether the request was made by another AWS service

For more information, see the [CloudTrail `userIdentity` element](#).

Understanding the Account Management log entries

A trail is a configuration that enables delivery of events as log files to an Amazon S3 bucket that you specify. CloudTrail log files contain one or more log entries. An event represents a single request from any source and includes information about the requested operation, the date and time of the operation, request parameters, and so on. CloudTrail log files aren't an ordered stack trace of the public API calls, so they don't appear in any specific order.

Example 1: The following example shows a CloudTrail log entry for a call to the `GetAlternateContact` operation to retrieve the current OPERATIONS alternate contact for an account. The values returned by the operation aren't included in the logged information.

Example 1

```
{  
  "eventVersion": "1.08",  
  "userIdentity": {  
    "type": "AssumedRole",  
    "principalId": "AROA1234567890EXAMPLE:AccountAPITests",  
    "arn": "arn:aws:sts::123456789012:assumed-role/ServiceTestRole/AccountAPITests",  
    "accountId": "123456789012",  
    "accessKeyId": "AKIAIOSFODNN7EXAMPLE",  
    "sessionContext": {  
      "sessionIssuer": {  
        "type": "Role",  
        "principalId": "AROA1234567890EXAMPLE",  
        "arn": "arn:aws:iam::123456789012:role/ServiceTestRole",  
        "accountId": "123456789012",  
        "userName": "ServiceTestRole"  
      },  
      "webIdFederationData": {},  
      "attributes": {  
        "mfaAuthenticated": "false",  
        "creationDate": "2021-04-30T19:25:53Z"  
      }  
    },  
  },  
  "eventTime": "2021-04-30T19:26:15Z",  
  "eventSource": "account.amazonaws.com",  
  "eventName": "GetAlternateContact",  
  "awsRegion": "us-east-1",  
  "sourceIPAddress": "10.24.34.250",  
}
```

```
"userAgent": "Mozilla/5.0",
"requestParameters": {
  "alternateContactType": "SECURITY"
},
"responseElements": null,
"requestID": "1a2b3c4d-5e6f-1234-abcd-111111111111",
"eventID": "1a2b3c4d-5e6f-1234-abcd-222222222222",
"readOnly": true,
"eventType": "AwsApiCall",
"managementEvent": true,
"eventCategory": "Management",
"recipientAccountId": "123456789012"
}
```

Example 2: The following example shows a CloudTrail log entry for a call to the PutAlternateContact operation to add a new BILLING alternate contact to an account.

```
{
  "eventVersion": "1.08",
  "userIdentity": {
    "type": "AssumedRole",
    "principalId": "AROA1234567890EXAMPLE:AccountAPITests",
    "arn": "arn:aws:sts::123456789012:assumed-role/ServiceTestRole/AccountAPITests",
    "accountId": "123456789012",
    "accessKeyId": "AKIAIOSFODNN7EXAMPLE",
    "sessionContext": {
      "sessionIssuer": {
        "type": "Role",
        "principalId": "AROA1234567890EXAMPLE",
        "arn": "arn:aws:iam::123456789012:role/ServiceTestRole",
        "accountId": "123456789012",
        "userName": "ServiceTestRole"
      },
      "webIdFederationData": {},
      "attributes": {
        "mfaAuthenticated": "false",
        "creationDate": "2021-04-30T18:33:00Z"
      }
    }
  },
  "eventTime": "2021-04-30T18:33:08Z",
  "eventSource": "account.amazonaws.com",
  "eventName": "PutAlternateContact",
```

```
"awsRegion": "us-east-1",
"sourceIPAddress": "10.24.34.250",
"userAgent": "Mozilla/5.0",
"requestParameters": {
    "name": "*Alejandro Rosalez*",
    "emailAddress": "alrosalez@example.com",
    "title": "CFO",
    "alternateContactType": "BILLING"
},
"responseElements": null,
"requestID": "1a2b3c4d-5e6f-1234-abcd-333333333333",
"eventID": "1a2b3c4d-5e6f-1234-abcd-444444444444",
"readOnly": false,
"eventType": "AwsApiCall",
"managementEvent": true,
"eventCategory": "Management",
"recipientAccountId": "123456789012"
}
```

Example 3: The following example shows a CloudTrail log entry for a call to the DeleteAlternateContact operation to delete the current OPERATIONS alternate contact.

```
{
"eventVersion": "1.08",
"userIdentity": {
    "type": "AssumedRole",
    "principalId": "AROA1234567890EXAMPLE:AccountAPITests",
    "arn": "arn:aws:sts::123456789012:assumed-role/ServiceTestRole/AccountAPITests",
    "accountId": "123456789012",
    "accessKeyId": "AKIAIOSFODNN7EXAMPLE",
    "sessionContext": {
        "sessionIssuer": {
            "type": "Role",
            "principalId": "AROA1234567890EXAMPLE",
            "arn": "arn:aws:iam::123456789012:role/ServiceTestRole",
            "accountId": "123456789012",
            "userName": "ServiceTestRole"
        },
        "webIdFederationData": {},
        "attributes": {
            "mfaAuthenticated": "false",
            "creationDate": "2021-04-30T18:33:00Z"
        }
    }
}
```

```
    },
    "eventTime": "2021-04-30T18:33:16Z",
    "eventSource": "account.amazonaws.com",
    "eventName": "DeleteAlternateContact",
    "awsRegion": "us-east-1",
    "sourceIPAddress": "10.24.34.250",
    "userAgent": "Mozilla/5.0",
    "requestParameters": {
        "alternateContactType": "OPERATIONS"
    },
    "responseElements": null,
    "requestID": "1a2b3c4d-5e6f-1234-abcd-555555555555",
    "eventID": "1a2b3c4d-5e6f-1234-abcd-666666666666",
    "readOnly": false,
    "eventType": "AwsApiCall",
    "managementEvent": true,
    "eventCategory": "Management",
    "recipientAccountId": "123456789012"
}
```

Monitoring Account Management events with EventBridge

Amazon EventBridge, formerly called CloudWatch Events, helps you monitor events that are specific to and initiate target actions that use other AWS services. Events from AWS services are delivered to EventBridge in near real time.

Using EventBridge, you can create *rules* that match incoming *events* and route them to *targets* for processing.

For more information, see [Getting started with Amazon EventBridge](#) in the *Amazon EventBridge User Guide*.

Account Management events

The following examples show events for Account Management. Events are produced on a best-effort basis.

Only events that are specific to enabling and disabling Regions and API calls via CloudTrail are currently available for Account Management.

Event types

- [Event for enabling and disabling Regions](#)

Event for enabling and disabling Regions

When you enable or disable a Region in an account, either from the Console or from the API, an asynchronous task is kicked off. The initial request will be logged as a CloudTrail event in the target account. In addition, an EventBridge event will be sent to the calling account when either the enable or disable process has started, and again once either process has completed.

The following example event shows how a request will be sent indicating that on 2020-09-30 the ap-east-1 Region was ENABLED for account 123456789012.

```
{  
  "version": "0",  
  "id": "11112222-3333-4444-5555-666677778888",  
  "detail-type": "Region Opt-In Status Change",  
  "source": "aws.account",  
  "account": "123456789012",  
  "time": "2020-09-30T06:51:08Z",  
  "region": "us-east-1",  
  "resources": [  
    "arn:aws:account::123456789012:account"  
  ],  
  "detail": {  
    "accountId": "123456789012",  
    "regionName": "ap-east-1",  
    "status": "ENABLED"  
  }  
}
```

There are four possible statuses which match the statuses returned by the `GetRegionOptStatus` and `ListRegions` APIs:

- **ENABLED** – The Region has been successfully enabled for the `accountId` indicated
- **ENABLING** – The Region is in the process of being enabled for the `accountId` indicated
- **DISABLED** – The Region has been successfully disabled for the `accountId` indicated
- **DISABLING** – The Region is in the process of being disabled for the `accountId` indicated

The following sample event pattern, creates a rule that captures all Region events.

```
{  
  "source": [  
    "aws.account"  
  ],  
  "detail-type": [  
    "Region Opt-In Status Change"  
  ]  
}
```

The following sample event pattern, creates a rule that captures only ENABLED and DISABLED Region events.

```
{  
  "source": [  
    "aws.account"  
  ],  
  "detail-type": [  
    "Region Opt-In Status Change"  
  ],  
  "detail": {  
    "status": [  
      "DISABLED",  
      "ENABLED"  
    ]  
  }  
}
```

Troubleshoot your AWS account

Use the information in the following topics to help you diagnose and fix issues with your AWS account. For help with the root user, see [Troubleshooting issues with the root user](#) in the *IAM User Guide*. For help with the sign-in process, see [Troubleshooting AWS account sign-in issues](#) in the *AWS Sign-In User Guide*.

Troubleshooting topics

- [Troubleshooting issues with AWS account creation](#)
- [Troubleshooting issues with AWS account closure](#)
- [Troubleshooting other issues with AWS accounts](#)

Troubleshooting issues with AWS account creation

Use the reference links in the following table to help you diagnose and fix issues with creating a new AWS account.

Issue	Reference link	Source
I don't know how to sign-up or create an account	Create an AWS account	This guide
What should I do if I didn't receive a call from AWS to verify my new account or the PIN I entered doesn't work?	https://repost.aws/knowledge-center/phone-verify-no-call	AWS re:Post
How do I resolve the "maximum number of failed attempts" error when I try to verify my AWS account by phone?	https://repost.aws/knowledge-center/maximum-failed-attempts	AWS re:Post
It's been more than 24 hours and my account isn't activated	https://repost.aws/knowledge-center/create-and-activate-aws-account	AWS re:Post

Issue	Reference link	Source
I can't sign into my new account after it has been created	https://docs.aws.amazon.com/signin/latest/userguide/e-troubleshooting-sign-in-issues.html	AWS Sign-In User Guide

For additional help, we recommend that you search [AWS re:Post](#) for content related to your specific issue. If you still need assistance, contact [AWS Support](#).

Troubleshooting issues with AWS account closure

Use the information below to help you diagnose and fix common issues found during the account closure process. For general information about the account closure process, see [Close an AWS account](#).

Topics

- [I don't know how to delete or cancel my account](#)
- [I don't see the Close account button on the Accounts page](#)
- [I closed my account but still haven't received an email confirmation](#)
- [I receive a "ConstraintViolationException" error when trying to close my account](#)
- [I receive a "CLOSE_ACCOUNT_QUOTA_EXCEEDED" error when trying to close a member account](#)
- [Do I need to delete my AWS organization before closing the management account?](#)

I don't know how to delete or cancel my account

To close your account, follow the instructions in [Close an AWS account](#).

I don't see the Close account button on the Accounts page

If you are not signed in as the root user, you will not see the **Close account** button displayed on the **Accounts** page. You must [Sign in to the AWS Management Console as the root user](#) to close your account. If you can't sign in, see [Troubleshooting issues with the root user](#).

I closed my account but still haven't received an email confirmation

This confirmation email is only sent to the root user email address for the AWS account. If you don't receive this email within a few hours, you can [Sign in to the AWS Management Console as the root user](#) to check that your account is closed. If your account was closed successfully, you will see a message displayed that indicates your account is closed. If the account you closed is a member account, you can verify successful closure by checking if the closed account is labeled as CLOSED in the AWS Organizations console. For more information, see [Closing a member account in your organization](#) in the *AWS Organizations User Guide*.

If you are trying to close a **management account** and do not receive an email confirmation about the account closure, your organization most likely has active member accounts. You can only close the management account if your organization doesn't have any active member accounts. To verify that there are no active member accounts remaining in your organization, go to the AWS Organizations console, and make sure that all member accounts are showing Closed next to their account names. After that, you can close the management account.

I receive a "ConstraintViolationException" error when trying to close my account

You are trying to close a management account using the AWS Organizations console, which is not possible. To close a management account, you need to [Sign in to the AWS Management Console as the root user](#) for the management account and close it from the **Accounts** page. For more information, see [Closing a management account in your organization](#) in the *AWS Organizations User Guide*.

I receive a "CLOSE_ACCOUNT_QUOTA_EXCEEDED" error when trying to close a member account

You can only close 10% of member accounts within a rolling 30 day period. This quota is not bound by a calendar month, but starts when you close an account. Within 30 days of that initial account closure, you can't exceed the 10% account closure limit. The minimum account closure is 10 and the maximum account closure is 1000, even if 10% of accounts exceeds 1000. For more information about Organizations quotas, see [Quotas for AWS Organizations](#) in the *AWS Organizations User Guide*.

Do I need to delete my AWS organization before closing the management account?

No, you don't need to delete your AWS organization before closing the management account. However, you can only close the management account if your organization doesn't have any active member accounts. To verify that there are no active member accounts remaining in your organization, go to the AWS Organizations console, and make sure that all member accounts are showing Closed next to their account names. After that, you can close the management account.

Troubleshooting other issues with AWS accounts

Use the information here to help you troubleshoot issues related to your AWS account.

Issues

- [I need to change the credit card for my AWS account](#)
- [I need to report fraudulent AWS account activity](#)
- [I need to close my AWS account](#)

I need to change the credit card for my AWS account

To change the credit card for your AWS account, you must be able to sign in. AWS has protections in place that require you to prove that you're the account owner. For instructions, see [Managing your credit card payment methods](#) in the *AWS Billing User Guide*.

I need to report fraudulent AWS account activity

If you suspect fraudulent activity using your AWS account and would like to make a report, see [How do I report abuse of AWS resources](#).

If you're having trouble with a purchase made on Amazon.com, see [Amazon Customer Service](#).

I need to close my AWS account

For help troubleshooting issues with closing your AWS account, see [Close an AWS account](#).

Close an AWS account

If you no longer need your AWS account, you can close it at any time by following the instructions in this section. After you've closed it, you can reopen it within 90 days from the day you closed the account. The timespan between the day you closed the account and when AWS permanently closes the account is referred to as the [post-closure period](#).

What you need to know before closing your account

Before closing your AWS account, you should consider the following:

- Closing your account will serve as your notice of termination of the AWS Customer Agreement for this account.
- You don't need to delete resources in your AWS account before closing it. However, we recommend you back up any resources or data that you want to keep. For instructions about how to back up a particular resource, see the appropriate [AWS documentation](#) for that service.
- You can reopen your account during the [post-closure period](#). Charges for the services that remained in your account will restart if you reopen it. You also remain responsible for any unpaid invoices and outstanding [Reserved Instances](#) and [Savings Plans](#).
- You remain responsible for all outstanding fees and charges for the services consumed before account closure. You will receive an AWS bill the following month after closing your account. For example, if you closed your account on January 15, you will receive a bill at the beginning of February for usage incurred from January 1 through January 15. You will continue receiving invoices for [Reserved Instances](#) and [Savings Plans](#) after closing your account until they expire.
- You will no longer be able to access AWS services that were previously available in your account. However, you can sign-in and access a closed AWS account during the [post-closure period](#) only to view past billing information, access account settings, or contact [AWS Support](#).
- You can't use the same email address that was registered to your AWS account at the time of its closure as the primary email of another AWS account. If you want to use the same email address for a different AWS account, we recommend updating it before closure. For more information, see [Update the root user email address](#).
- If you've [enabled multi-factor authentication \(MFA\)](#) on your AWS account root user, or configured an [MFA device on an IAM user](#), MFA isn't removed automatically when you close the account. If you choose to leave MFA turned on during the 90 days [post-closure period](#), keep the MFA device active until the post-closure period has expired in case you need to access the account during

that time. Note, the hardware TOTP token devices cannot be associated with another user after the permanent closure of your account. If you would like to use the hardware TOTP token with another user later, you have the option to [deactivate the hardware MFA device](#) before closing the account. MFA devices for [IAM users](#) must be deleted by the account administrator.

Additional considerations for member accounts

- When you close a member account, that account isn't removed from the organization until after the [post-closure period](#). During the post-closure period, a closed member account still counts toward your quota of accounts in the organization. To avoid having the account count against the quota, see [Remove a member account from your organization](#) before closing it.
- You can only close 10% of member accounts within a rolling 30 day period. This quota is not bound by a calendar month, but starts when you close an account. Within 30 days of that initial account closure, you can't exceed the 10% account closure limit. The minimum account closure is 10 and the maximum account closure is 1000, even if 10% of accounts exceeds 1000. For more information about Organizations quotas, see [Quotas for AWS Organizations](#).
- If you use AWS Control Tower, you need to unmanage the member account before you attempt to close the account. See [Unmanage a member account](#) in the *AWS Control Tower User Guide*.

Service specific considerations

- AWS Marketplace subscriptions aren't automatically canceled on account closure. If you have any subscriptions, first [terminate all instances of your software](#) in the subscriptions. Then, go to the [Manage subscriptions](#) page of the AWS Marketplace console and cancel your subscriptions.
- After an account has been closed, AWS will send daily emails for up to five days before we suspend the domain. After the domain has been suspended, and depending on the domain's registrar, we will either delete the domain within 30 days or release the domain to its registrar. For more information, see [My AWS account is closed or permanently closed, and my domain is registered with Route 53](#).
- AWS CloudTrail is a foundational security service. This means that trails created by users can continue to exist and deliver events even after an AWS account is closed, unless a user explicitly deletes the trails in their AWS account before closing it. For more information about how to request trail deletion after an AWS account has been closed, see [AWS account closure and trails](#) in the *CloudTrail User Guide*.

How to close your account

You can close your AWS account using the following procedure. Note, that there is different guidance provided in each tab depending on the type of account [standalone, member, management, and AWS GovCloud (US)] you want to close.

If you experience any issues during the process of closing your account, see [Troubleshooting issues with AWS account closure](#).

Standalone account

A standalone account is an individually managed account that is not part of AWS Organizations.

To close a standalone account from the Accounts page

1. [Sign in to the AWS Management Console as the root user](#) in the AWS account that you want to close. You can't close an account while signed in as an IAM user or role.
2. On the navigation bar in the upper-right corner, choose your account name or number, and then choose **Account**.
3. On the [Account page](#), choose the **Close account** button.
4. Type your account ID (displayed at the top of the closure dialog box) to confirm that you have read and understand the account closure process.
5. Choose the **Close account** button to initiate the account closure process.
6. Within a few minutes, you should receive an email confirmation that your account has been closed.

Note

This task isn't supported in the AWS CLI or by an API operation from one of the AWS SDKs. You can perform this task only by using the AWS Management Console.

Member account

A member account is an AWS account that is part of AWS Organizations.

To close a member account from the AWS Organizations console

1. Sign in to the [AWS Organizations console](#).
2. On the **AWS accounts** page, find and choose the name of the member account you want to close. You can navigate the OU hierarchy, or look at a flat list of accounts without the OU structure.
3. Choose **Close** next to the account name at the top of the page. This option is only available when an AWS organization is in [All features](#) mode.

 **Note**

If your organization is using [Consolidated billing](#) mode, you won't be able to see the **Close** button in the console. To close an account in consolidated billing mode, sign in to the account you want to close as the root user. On the **Accounts** page, choose the **Close account** button, enter your account ID, and then choose the **Close account** button.

4. Read and ensure that you understand the account closure guidance.
5. Enter the member account ID, and then choose **Close account** to initiate the account closure process.

 **Note**

Any member account that you close will display a **CLOSED** label next to its account name in the AWS Organizations console for up to 90 days after the original closure date. After 90 days, the member account will no longer be displayed in the AWS Organizations console.

To close a member account from the Accounts page

Optionally, you can close an AWS member account directly from the [Account page](#) in the AWS Management Console. For step-by-step guidance, follow the instructions in the **Standalone account** tab.

To close a member account using AWS CLI and SDKs

For instructions on how to close a member account using the AWS CLI and SDKs, see [Closing a member account in your organization](#) in the *AWS Organizations User Guide*.

Management account

A management account is an AWS account that acts as the parent or root account for AWS Organizations.

Note

You cannot close a management account directly from the AWS Organizations console.

To close a management account from the Accounts page

1. [Sign in to the AWS Management Console as the root user](#) for the management account that you want to close. You can't close an account while signed in as an IAM user or role.
2. Verify that there are no active member accounts remaining in your organization. To do this, go to the [AWS Organizations console](#), and make sure that all member accounts are showing Closed next to their account names. If you have a member account that is still active, you will need to follow the account closure guidance provided in the **Member account** tab before you can move to the next step.
3. On the navigation bar in the upper-right corner, choose your account name or number, and then choose **Account**.
4. On the [Account page](#), choose the **Close account** button.
5. Type your account ID (displayed at the top of the closure dialog box) to confirm that you have read and understand the account closure process.
6. Choose the **Close account** button to initiate the account closure process.
7. Within a few minutes, you should receive an email confirmation that your account has been closed.

Note

This task isn't supported in the AWS CLI or by an API operation from one of the AWS SDKs. You can perform this task only by using the AWS Management Console.

AWS GovCloud (US) account

An AWS GovCloud (US) account is always linked to a single standard AWS account for billing and payment purposes.

To close an AWS GovCloud (US) account

If you have an AWS account that is linked to a AWS GovCloud (US) account, you need to close the standard account before you close the AWS GovCloud (US) account. For more details, including how to back-up data and avoid unintended AWS GovCloud (US) charges, see [Closing an AWS GovCloud \(US\) account](#) in the *AWS GovCloud (US) User Guide*.

What to expect after you close your account

Immediately after you close your account, the following will occur:

- You will receive an email confirming the account closure to the root user's email address. If you don't receive this email within a few hours, see [Troubleshooting issues with AWS account closure](#).
- Any member account that you close will display a CLOSED label next to its account name in the AWS Organizations console for up to 90 days after the original closure date. After 90 days, the member account will no longer be displayed in the AWS Organizations console.
- If you have granted permissions to access services in your AWS account to other accounts, any access requests made from those accounts should fail after account closure. If you reopen your AWS account, other AWS accounts can again access your account's AWS services and resources if you granted the necessary permissions to them.

Account closure may not occur immediately across all Regions and services and can take several hours to complete.

Post-closure period

The post-closure period refers to the length of time between the day you closed your account and when AWS permanently closes your AWS account. The post-closure period is 90 days. During the post-closure period, you can access your content and AWS services only by reopening your account. After the post-closure period, AWS permanently closes your AWS account, and you can no longer reopen it. AWS will also delete content and resources in your account (except for CloudTrail trails). After an account has been permanently closed, its [AWS account ID](#) can never be reused.

Reopening your AWS account

Your account will permanently close in 90 days, after which you will not be able to reopen your account and AWS will delete the content remaining in your account. To reopen your account before it is permanently closed, (1) you must contact [AWS Support](#) as soon as possible, and (2) we must receive full payment of any outstanding balance, including providing required information as specified on the invoice, within 60 days from the date of account closure.

 **Note**

Charges for the services that remained in your account will restart if you reopen it.

API Reference

The API operations in the Account Management (account) namespace enable you to modify your AWS account.

Every AWS account supports metadata with information about the account, including information about up to three alternate contacts associated with the account. These are in addition to the email address associated with the [root user](#) of the account. You can specify only one of each of the following contact types associated with an account.

- Billing contact
- Operations contact
- Security contact

By default, the API operations discussed in this guide apply directly to the account that calls the operation. The [identity](#) in the account that is calling the operation is typically an IAM role or IAM user and must have permission applied by an IAM policy to call the API operation. Alternatively, you can call these API operations from an identity in an AWS Organizations management account and specify the account ID number for any AWS account that is a member of the organization.

API version

This version of the Accounts API Reference documents the Account Management API version 2021-02-01.

Note

As an alternative to using the API directly, you can use one of the AWS SDKs, which consist of libraries and sample code for various programming languages and platforms (Java, Ruby, .NET, iOS, Android, and more). The SDKs provide a convenient way to create programmatic access to AWS Organizations. For example, the SDKs take care of cryptographically signing requests, managing errors, and retrying requests automatically. For more information about the AWS SDKs, including how to download and install them, see [Tools for Amazon Web Services](#).

We recommend that you use the AWS SDKs to make programmatic API calls to the Account Management service. However, you also can use the Account Management Query API to make direct calls to the Account Management web service. To learn more about the Account Management Query API, see [Calling the API by making HTTP Query requests](#) in the Account Management User Guide. Organizations supports GET and POST requests for all actions. That is, the API does not require you to use GET for some actions and POST for others. However, GET requests are subject to the limitation size of a URL. Therefore, for operations that require larger sizes, use a POST request.

Signing requests

When you send HTTP requests to AWS, you must sign the requests so that AWS can identify who sent them. You sign requests with your AWS access key, which consists of an access key ID and a secret access key. We strongly recommend that you do not create an access key for your root account. Anyone who has the access key for your root account has unrestricted access to all the resources in your account. Instead, create an access key for an IAM user that has administrative privileges. As another option, use AWS Security Token Service to generate temporary security credentials, and use those credentials to sign requests.

To sign requests, we recommend that you use Signature Version 4. If you have an existing application that uses Signature Version 2, you do not have to update it to use Signature Version 4. However, some operations now require Signature Version 4. The documentation for operations that require version 4 indicate this requirement. For more information, see [Signing AWS API requests](#) in the *IAM User Guide*.

When you use the AWS Command Line Interface (AWS CLI) or one of the AWS SDKs to make requests to AWS, these tools automatically sign the requests for you with the access key that you specify when you configure the tools.

Support and feedback for Account Management

We welcome your feedback. Send your comments to feedback-awsaccounts@amazon.com or post your feedback and questions in the [Account Management support forum](#). For more information about the AWS support forums, see [Forums Help](#).

How examples are presented

The JSON returned by the Account Management as response to your requests is returned as a single long string without line breaks or formatting whitespace. Both line breaks and whitespace are shown in the examples in this guide to improve readability. When example input parameters

also would result in long strings that would extend beyond the screen, we insert line breaks to enhance readability. You should always submit the input as a single JSON text string.

Recording API Requests

Account Management supports CloudTrail, a service that records AWS API calls for your AWS account and delivers log files to an Amazon S3 bucket. By using information collected by CloudTrail, you can determine which requests were successfully made to Account Management, who made the request, when it was made, and so on. For more about Account Management and its support for CloudTrail, see [Logging AWS Account Management API calls using AWS CloudTrail](#). To learn more about CloudTrail, including how to turn it on and find your log files, see the [AWS CloudTrail User Guide](#).

Actions

The following actions are supported:

- [AcceptPrimaryEmailUpdate](#)
- [DeleteAlternateContact](#)
- [DisableRegion](#)
- [EnableRegion](#)
- [GetAccountInformation](#)
- [GetAlternateContact](#)
- [GetContactInformation](#)
- [GetGovCloudAccountInformation](#)
- [GetPrimaryEmail](#)
- [GetRegionOptStatus](#)
- [ListRegions](#)
- [PutAccountName](#)
- [PutAlternateContact](#)
- [PutContactInformation](#)
- [StartPrimaryEmailUpdate](#)

AcceptPrimaryEmailUpdate

Accepts the request that originated from [StartPrimaryEmailUpdate](#) to update the primary email address (also known as the root user email address) for the specified account.

Request Syntax

```
POST /acceptPrimaryEmailUpdate HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "Otp": "string",
  "PrimaryEmail": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

This operation can only be called from the management account or the delegated administrator account of an organization for a member account.

 **Note**

The management account can't specify its own AccountId.

Type: String

Pattern: \d{12}

Required: Yes

Otp

The OTP code sent to the PrimaryEmail specified on the StartPrimaryEmailUpdate API call.

Type: String

Pattern: [a-zA-Z0-9]{6}

Required: Yes

PrimaryEmail

The new primary email address for use with the specified account. This must match the PrimaryEmail from the StartPrimaryEmailUpdate API call.

Type: String

Length Constraints: Minimum length of 5. Maximum length of 64.

Required: Yes

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Status": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

Status

Retrieves the status of the accepted primary email update request.

Type: String

Valid Values: PENDING | ACCEPTED

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

ConflictException

The request could not be processed because of a conflict in the current status of the resource. For example, this happens if you try to enable a Region that is currently being disabled (in a status of DISABLING) or if you try to change an account's root user email to an email address which is already in use.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 409

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)

- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

DeleteAlternateContact

Deletes the specified alternate contact from an AWS account.

For complete details about how to use the alternate contact operations, see [Update the alternate contacts for your AWS account](#).

Note

Before you can update the alternate contact information for an AWS account that is managed by AWS Organizations, you must first enable integration between AWS Account Management and Organizations. For more information, see [Enable trusted access for AWS Account Management](#).

Request Syntax

```
POST /deleteAlternateContact HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "AlternateContactType": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

 **Note**

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

[**AlternateContactType**](#)

Specifies which of the alternate contacts to delete.

Type: String

Valid Values: BILLING | OPERATIONS | SECURITY

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples

Example 1

The following example deletes the security alternate contact for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.DeleteAlternateContact

{
  "AccountName": "MyAccount"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json
```

Example 2

The following example deletes the billing alternate contact for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1
```

```
X-Amz-Target: AWSAccountV20210201.DeleteAlternateContact
```

```
{  
  "AccountId": "123456789012",  
  "AlternateContactType": "BILLING"  
}
```

Sample Response

```
HTTP/1.1 200 OK  
Content-Type: application/json
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

DisableRegion

Disables (opts-out) a particular Region for an account.

Note

The act of disabling a Region will remove all IAM access to any resources that reside in that Region.

Request Syntax

```
POST /disableRegion HTTP/1.1
Content-type: application/json

{
  "AccountIdRegionName
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

RegionName

Specifies the Region-code for a given Region name (for example, af-south-1). When you disable a Region, AWS performs actions to deactivate that Region in your account, such as destroying IAM resources in the Region. This process takes a few minutes for most accounts, but this can take several hours. You cannot enable the Region until the disabling process is fully completed.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

ConflictException

The request could not be processed because of a conflict in the current status of the resource. For example, this happens if you try to enable a Region that is currently being disabled (in a status of DISABLING) or if you try to change an account's root user email to an email address which is already in use.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 409

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

EnableRegion

Enables (opts-in) a particular Region for an account.

Request Syntax

```
POST /enableRegion HTTP/1.1
Content-type: application/json

{
  "AccountIdRegionName
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

RegionName

Specifies the Region-code for a given Region name (for example, af-south-1). When you enable a Region, AWS performs actions to prepare your account in that Region, such as distributing your IAM resources to the Region. This process takes a few minutes for most accounts, but it can take several hours. You cannot use the Region until this process is complete. Furthermore, you cannot disable the Region until the enabling process is fully completed.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

ConflictException

The request could not be processed because of a conflict in the current status of the resource. For example, this happens if you try to enable a Region that is currently being disabled (in a status of DISABLING) or if you try to change an account's root user email to an email address which is already in use.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 409

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetAccountInformation

Retrieves information about the specified account including its account name, account ID, and account creation date and time. To use this API, an IAM user or role must have the account:GetAccountInformation IAM permission.

Request Syntax

```
POST /getAccountInformation HTTP/1.1
Content-type: application/json

{
  "AccountId": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

Note

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "AccountCreatedDate": "string",
  "AccountId": "string",
  "AccountName": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

AccountCreatedDate

The date and time the account was created.

Type: Timestamp

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

This operation can only be called from the management account or the delegated administrator account of an organization for a member account.

 **Note**

The management account can't specify its own AccountId.

Type: String

Pattern: \d{12}

AccountName

The name of the account.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Pattern: [-;=?-~]+

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples

Example 1

The following example retrieves the account information for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetAccountInformation
{}

```

Sample Response

```
HTTP/1.1 200 OK

```

```
Content-Type: application/json

{
  "AccountId": "123456789012",
  "AccountName": "MyAccount",
  "AccountCreatedDate": "2020-11-30T17:44:37Z"
}
```

Example 2

The following example retrieves the account information for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetAccountInformation

{
  "AccountId": "123456789012"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "AccountId": "123456789012",
  "AccountName": "MyMemberAccount",
  "AccountCreatedDate": "2020-11-30T17:44:37Z"
}
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)

- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetAlternateContact

Retrieves the specified alternate contact attached to an AWS account.

For complete details about how to use the alternate contact operations, see [Update the alternate contacts for your AWS account](#).

Note

Before you can update the alternate contact information for an AWS account that is managed by AWS Organizations, you must first enable integration between AWS Account Management and Organizations. For more information, see [Enable trusted access for AWS Account Management](#).

Request Syntax

```
POST /getAlternateContact HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "AlternateContactType": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

 **Note**

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

[AlternateContactType](#)

Specifies which alternate contact you want to retrieve.

Type: String

Valid Values: BILLING | OPERATIONS | SECURITY

Required: Yes

Response Syntax

```
HTTP/1.1 200
Content-type: application/json
```

```
{
  "AlternateContact": {
    "AlternateContactType": "string",
    "EmailAddress": "string",
    "Name": "string",
```

```
  "PhoneNumber": "string",
  "Title": "string"
}
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

AlternateContact

A structure that contains the details for the specified alternate contact.

Type: [AlternateContact](#) object

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples

Example 1

The following example retrieves the security alternate contact for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetAlternateContact
```

```
{  
  "AlternateContactType": "SECURITY"  
}
```

Sample Response

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "AlternateContact": {  
    "Name": "Anika",  
    "Title": "COO",  
    "EmailAddress": "anika@example.com",  
    "PhoneNumber": "206-555-0198",  
    "AlternateContactType": "Security"  
  }  
}
```

Example 2

The following example retrieves the operations alternate contact for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1  
X-Amz-Target: AWSAccountV20210201.GetAlternateContact  
  
{  
  "AccountId": "123456789012",  
  "AlternateContactType": "Operations"  
}
```

Sample Response

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "AlternateContact": {
```

```
        "Name": "Anika",
        "Title": "COO",
        "EmailAddress": "anika@example.com",
        "PhoneNumber": "206-555-0198",
        "AlternateContactType": "Operations"
    }
}
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetContactInformation

Retrieves the primary contact information of an AWS account.

For complete details about how to use the primary contact operations, see [Update the primary contact for your AWS account](#).

Request Syntax

```
POST /getContactInformation HTTP/1.1
Content-type: application/json

{
  "AccountId": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "ContactInformation": {
    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "CompanyName": "string",
    "CountryCode": "string",
    "DistrictOrCounty": "string",
    "FullName": "string",
    "PhoneNumber": "string",
    "PostalCode": "string",
    "StateOrRegion": "string",
    "WebsiteUrl": "string"
  }
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

ContactInformation

Contains the details of the primary contact information associated with an AWS account.

Type: [ContactInformation](#) object

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetGovCloudAccountInformation

Retrieves information about the GovCloud account linked to the specified standard account (if it exists) including the GovCloud account ID and state. To use this API, an IAM user or role must have the account :GetGovCloudAccountInformation IAM permission.

Request Syntax

```
POST /getGovCloudAccountInformation HTTP/1.1
Content-type: application/json

{
  "StandardAccountId": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

StandardAccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

Note

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "AccountState": "string",
  "GovCloudAccountId": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

[AccountState](#)

The account state of the linked GovCloud account.

Type: String

Valid Values: PENDING_ACTIVATION | ACTIVE | SUSPENDED | CLOSED

[GovCloudAccountId](#)

The 12-digit account ID number of the linked GovCloud account.

Type: String

Pattern: \d{12}

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

ResourceUnavailableException

The operation failed because it specified a resource that is not currently available.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 424

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples**Example 1**

The following example retrieves the linked GovCloud account information for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetGovCloudAccountInformation
{}


```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
```

```
"GovCloudAccountId": "123456789012",
"AccountState": "ACTIVE"
}
```

Example 2

The following example retrieves the linked GovCloud account information for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetGovCloudAccountInformation

{
  "StandardAccountId": "111111111111"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "GovCloudAccountId": "123456789012",
  "AccountState": "ACTIVE"
}
```

Example 3

The following example attempts to retrieve the linked GovCloud account information for a standard account that is not linked to a GovCloud account.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.GetGovCloudAccountInformation

{
  "StandardAccountId": "222222222222"
}
```

}

Sample Response

```
HTTP/1.1 404
Content-Type: application/json

{
    "message": "GovCloud Account ID not found for Standard Account - 222222222222."
}
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetPrimaryEmail

Retrieves the primary email address for the specified account.

Request Syntax

```
POST /getPrimaryEmail HTTP/1.1
Content-type: application/json

{
  "AccountId": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

This operation can only be called from the management account or the delegated administrator account of an organization for a member account.

 **Note**

The management account can't specify its own AccountId.

Type: String

Pattern: \d{12}

Required: Yes

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "PrimaryEmail": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

[PrimaryEmail](#)

Retrieves the primary email address associated with the specified account.

Type: String

Length Constraints: Minimum length of 5. Maximum length of 64.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

GetRegionOptStatus

Retrieves the opt-in status of a particular Region.

Request Syntax

```
POST /getRegionOptStatus HTTP/1.1
Content-type: application/json

{
  "AccountIdRegionName
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

RegionName

Specifies the Region-code for a given Region name (for example, af-south-1). This function will return the status of whatever Region you pass into this parameter.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "RegionName": "string",
  "RegionOptStatus": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

RegionName

The Region code that was passed in.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

RegionOptStatus

One of the potential statuses a Region can undergo (Enabled, Enabling, Disabled, Disabling, Enabled_By_Default).

Type: String

Valid Values: ENABLED | ENABLING | DISABLING | DISABLED | ENABLED_BY_DEFAULT

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

ListRegions

Lists all the Regions for a given account and their respective opt-in statuses. Optionally, this list can be filtered by the `region-opt-status-contains` parameter.

Request Syntax

```
POST /listRegions HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "MaxResults": number,
  "NextToken": "string",
  "RegionOptStatusContains": [ "string" ]
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

MaxResults

The total number of items to return in the command's output. If the total number of items available is more than the value specified, a NextToken is provided in the command's output. To resume pagination, provide the NextToken value in the starting-token argument of a subsequent command. Do not use the NextToken response element directly outside of the AWS CLI. For usage examples, see [Pagination](#) in the *AWS Command Line Interface User Guide*.

Type: Integer

Valid Range: Minimum value of 1. Maximum value of 50.

Required: No

NextToken

A token used to specify where to start paginating. This is the NextToken from a previously truncated response. For usage examples, see [Pagination](#) in the *AWS Command Line Interface User Guide*.

Type: String

Length Constraints: Minimum length of 0. Maximum length of 1000.

Required: No

RegionOptStatusContains

A list of Region statuses (Enabling, Enabled, Disabling, Disabled, Enabled_by_default) to use to filter the list of Regions for a given account. For example, passing in a value of ENABLING will only return a list of Regions with a Region status of ENABLING.

Type: Array of strings

Valid Values: ENABLED | ENABLING | DISABLING | DISABLED | ENABLED_BY_DEFAULT

Required: No

Response Syntax

```
HTTP/1.1 200
Content-type: application/json
```

```
{
  "NextToken": "string",
  "Regions": [
    {
      "RegionName": "string",
      "RegionOptStatus": "string"
    }
  ]
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

[NextToken](#)

If there is more data to be returned, this will be populated. It should be passed into the next-token request parameter of `list-regions`.

Type: String

[Regions](#)

This is a list of Regions for a given account, or if the `filtered` parameter was used, a list of Regions that match the filter criteria set in the `filter` parameter.

Type: Array of [Region](#) objects

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

PutAccountName

Updates the account name of the specified account. To use this API, IAM principals must have the account:PutAccountName IAM permission.

Request Syntax

```
POST /putAccountName HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "AccountName": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

Note

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

AccountName

The name of the account.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Pattern: [-;=?-~]+

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples

Example 1

The following example updates the name for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.PutAccountName

{
  "AccountName": "MyAccount"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json
```

Example 2

The following example updates the account name for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.PutAccountName

{
  "AccountId": "123456789012",
  "AccountName": "MyMemberAccount"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)

- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

PutAlternateContact

Modifies the specified alternate contact attached to an AWS account.

For complete details about how to use the alternate contact operations, see [Update the alternate contacts for your AWS account](#).

Note

Before you can update the alternate contact information for an AWS account that is managed by AWS Organizations, you must first enable integration between AWS Account Management and Organizations. For more information, see [Enable trusted access for AWS Account Management](#).

Request Syntax

```
POST /putAlternateContact HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "AlternateContactType": "string",
  "EmailAddress": "string",
  "Name": "string",
  "PhoneNumber": "string",
  "Title": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12 digit account ID number of the AWS account that you want to access or modify with this operation.

If you do not specify this parameter, it defaults to the AWS account of the identity used to call the operation.

To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account, and the specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

 **Note**

The management account can't specify its own AccountId; it must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, then don't specify this parameter, and call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

[**AlternateContactType**](#)

Specifies which alternate contact you want to create or update.

Type: String

Valid Values: BILLING | OPERATIONS | SECURITY

Required: Yes

[**EmailAddress**](#)

Specifies an email address for the alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 254.

Pattern: `[\s]*[\w+=.#|!&-]+@[\\w.-]+\\.\\.\\. [\w]+[\s]*`

Required: Yes

Name

Specifies a name for the alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 64.

Required: Yes

PhoneNumber

Specifies a phone number for the alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 25.

Pattern: `[\s0-9()+-]+`

Required: Yes

Title

Specifies a title for the alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

Examples

Example 1

The following example sets the billing alternate contact for the account whose credentials are used to call the operation.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.PutAlternateContact

{
    "AlternateContactType": "Billing",
    "Name": "Carlos Salazar",
    "Title": "CFO",
    "EmailAddress": "carlos@example.com",
    "PhoneNumber": "206-555-0199"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json
```

Example 2

The following example sets or overwrites the billing alternate contact for the specified member account in an organization. You must use credentials from either the organization's management account or from the Account Management service's delegated admin account.

Sample Request

```
POST / HTTP/1.1
X-Amz-Target: AWSAccountV20210201.PutAlternateContact

{
    "AccountId": "123456789012",
    "AlternateContactType": "Billing",
```

```
  "Name": "Carlos Salazar",
  "Title": "CFO",
  "EmailAddress": "carlos@example.com",
  "PhoneNumber": "206-555-0199"
}
```

Sample Response

```
HTTP/1.1 200 OK
Content-Type: application/json
```

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

PutContactInformation

Updates the primary contact information of an AWS account.

For complete details about how to use the primary contact operations, see [Update the primary contact for your AWS account](#).

Request Syntax

```
POST /putContactInformation HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "ContactInformation": {
    "AddressLine1": "string",
    "AddressLine2": "string",
    "AddressLine3": "string",
    "City": "string",
    "CompanyName": "string",
    "CountryCode": "string",
    "DistrictOrCounty": "string",
    "FullName": "string",
    "PhoneNumber": "string",
    "PostalCode": "string",
    "StateOrRegion": "string",
    "WebsiteUrl": "string"
  }
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. If you don't specify this parameter, it defaults to the Amazon Web Services

account of the identity used to call the operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated administrator](#) account assigned.

Note

The management account can't specify its own AccountId. It must call the operation in standalone context by not including the AccountId parameter.

To call this operation on an account that is not a member of an organization, don't specify this parameter. Instead, call the operation using an identity belonging to the account whose contacts you wish to retrieve or modify.

Type: String

Pattern: \d{12}

Required: No

[ContactInformation](#)

Contains the details of the primary contact information associated with an AWS account.

Type: [ContactInformation](#) object

Required: Yes

Response Syntax

HTTP/1.1 200

Response Elements

If the action is successful, the service sends back an HTTP 200 response with an empty HTTP body.

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 403

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 500

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

StartPrimaryEmailUpdate

Starts the process to update the primary email address for the specified account.

Request Syntax

```
POST /startPrimaryEmailUpdate HTTP/1.1
Content-type: application/json

{
  "AccountId": "string",
  "PrimaryEmail": "string"
}
```

URI Request Parameters

The request does not use any URI parameters.

Request Body

The request accepts the following data in JSON format.

AccountId

Specifies the 12-digit account ID number of the AWS account that you want to access or modify with this operation. To use this parameter, the caller must be an identity in the [organization's management account](#) or a delegated administrator account. The specified account ID must be a member account in the same organization. The organization must have [all features enabled](#), and the organization must have [trusted access](#) enabled for the Account Management service, and optionally a [delegated admin](#) account assigned.

This operation can only be called from the management account or the delegated administrator account of an organization for a member account.

 **Note**

The management account can't specify its own AccountId.

Type: String

Pattern: \d{12}

Required: Yes

PrimaryEmail

The new primary email address (also known as the root user email address) to use in the specified account.

Type: String

Length Constraints: Minimum length of 5. Maximum length of 64.

Required: Yes

Response Syntax

```
HTTP/1.1 200
Content-type: application/json

{
  "Status": "string"
}
```

Response Elements

If the action is successful, the service sends back an HTTP 200 response.

The following data is returned in JSON format by the service.

Status

The status of the primary email update request.

Type: String

Valid Values: PENDING | ACCEPTED

Errors

For information about the errors that are common to all actions, see [Common Errors](#).

AccessDeniedException

The operation failed because the calling identity doesn't have the minimum required permissions.

errorType

The value populated to the `x-amzn-ErrorType` response header by API Gateway.

HTTP Status Code: 403

ConflictException

The request could not be processed because of a conflict in the current status of the resource. For example, this happens if you try to enable a Region that is currently being disabled (in a status of `DISABLING`) or if you try to change an account's root user email to an email address which is already in use.

errorType

The value populated to the `x-amzn-ErrorType` response header by API Gateway.

HTTP Status Code: 409

InternalServerException

The operation failed because of an error internal to AWS. Try your operation again later.

errorType

The value populated to the `x-amzn-ErrorType` response header by API Gateway.

HTTP Status Code: 500

ResourceNotFoundException

The operation failed because it specified a resource that can't be found.

errorType

The value populated to the `x-amzn-ErrorType` response header by API Gateway.

HTTP Status Code: 404

TooManyRequestsException

The operation failed because it was called too frequently and exceeded a throttle limit.

errorType

The value populated to the x-amzn-ErrorType response header by API Gateway.

HTTP Status Code: 429

ValidationException

The operation failed because one of the input parameters was invalid.

fieldList

The field where the invalid entry was detected.

message

The message that informs you about what was invalid about the request.

reason

The reason that validation failed.

HTTP Status Code: 400

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS Command Line Interface V2](#)
- [AWS SDK for .NET V4](#)
- [AWS SDK for C++](#)
- [AWS SDK for Go v2](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for JavaScript V3](#)
- [AWS SDK for Kotlin](#)
- [AWS SDK for PHP V3](#)
- [AWS SDK for Python](#)
- [AWS SDK for Ruby V3](#)

Related actions in other AWS services

The following operations are related to AWS Account Management but are part of the AWS Organizations namespace:

- [CreateAccount](#)
- [CreateGovCloudAccount](#)
- [DescribeAccount](#)

CreateAccount

The CreateAccount API operation is available to use only in the context of an organization that is managed by the AWS Organizations service. The API operation is defined in that service's namespace.

For more information, see [CreateAccount](#) in the *AWS Organizations API Reference*.

CreateGovCloudAccount

The CreateGovCloudAccount API operation is available to use only in the context of an organization that is managed by the AWS Organizations service. The API operation is defined in that service's namespace.

For more information, see [CreateGovCloudAccount](#) in the *AWS Organizations API Reference*.

DescribeAccount

The DescribeAccount API operation is available to use only in the context of an organization that is managed by the AWS Organizations service. The API operation is defined in that service's namespace.

For more information, see [DescribeAccount](#) in the *AWS Organizations API Reference*.

Data Types

The following data types are supported:

- [AlternateContact](#)

- [ContactInformation](#)
- [Region](#)
- [ValidationExceptionField](#)

AlternateContact

A structure that contains the details of an alternate contact associated with an AWS account

Contents

AlternateContactType

The type of alternate contact.

Type: String

Valid Values: BILLING | OPERATIONS | SECURITY

Required: No

EmailAddress

The email address associated with this alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 254.

Pattern: `[\s]*[\w+=.#|!&-]+@[\\w.-]+\\.\\w]+[\s]*`

Required: No

Name

The name associated with this alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 64.

Required: No

PhoneNumber

The phone number associated with this alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 25.

Pattern: `[\s0-9()+-]+`

Required: No

Title

The title associated with this alternate contact.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: No

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS SDK for C++](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for Ruby V3](#)

ContactInformation

Contains the details of the primary contact information associated with an AWS account.

Contents

AddressLine1

The first line of the primary contact address.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 60.

Required: Yes

City

The city of the primary contact address.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

CountryCode

The ISO-3166 two-letter country code for the primary contact address.

Type: String

Length Constraints: Fixed length of 2.

Required: Yes

FullName

The full name of the primary contact address.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: Yes

PhoneNumber

The phone number of the primary contact information. The number will be validated and, in some countries, checked for activation.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 20.

Pattern: `[+][\s0-9()]-]+`

Required: Yes

PostalCode

The postal code of the primary contact address.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 20.

Required: Yes

AddressLine2

The second line of the primary contact address, if any.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 60.

Required: No

AddressLine3

The third line of the primary contact address, if any.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 60.

Required: No

CompanyName

The name of the company associated with the primary contact information, if any.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: No

DistrictOrCounty

The district or county of the primary contact address, if any.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: No

StateOrRegion

The state or region of the primary contact address. If the mailing address is within the United States (US), the value in this field can be either a two character state code (for example, NJ) or the full state name (for example, New Jersey). This field is required in the following countries: US, CA, GB, DE, JP, IN, and BR.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: No

WebsiteUrl

The URL of the website associated with the primary contact information, if any.

Type: String

Length Constraints: Minimum length of 1. Maximum length of 256.

Required: No

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS SDK for C++](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for Ruby V3](#)

Region

This is a structure that expresses the Region for a given account, consisting of a name and opt-in status.

Contents

RegionName

The Region code of a given Region (for example, us-east-1).

Type: String

Length Constraints: Minimum length of 1. Maximum length of 50.

Required: No

RegionOptStatus

One of potential statuses a Region can undergo (Enabled, Enabling, Disabled, Disabling, Enabled_By_Default).

Type: String

Valid Values: ENABLED | ENABLING | DISABLING | DISABLED | ENABLED_BY_DEFAULT

Required: No

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS SDK for C++](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for Ruby V3](#)

ValidationExceptionField

The input failed to meet the constraints specified by the AWS service in a specified field.

Contents

message

A message about the validation exception.

Type: String

Required: Yes

name

The field name where the invalid entry was detected.

Type: String

Required: Yes

See Also

For more information about using this API in one of the language-specific AWS SDKs, see the following:

- [AWS SDK for C++](#)
- [AWS SDK for Java V2](#)
- [AWS SDK for Ruby V3](#)

Common Parameters

The following list contains the parameters that all actions use for signing Signature Version 4 requests with a query string. Any action-specific parameters are listed in the topic for that action. For more information about Signature Version 4, see [Signing AWS API requests](#) in the *IAM User Guide*.

Action

The action to be performed.

Type: string

Required: Yes

Version

The API version that the request is written for, expressed in the format YYYY-MM-DD.

Type: string

Required: Yes

X-Amz-Algorithm

The hash algorithm that you used to create the request signature.

Condition: Specify this parameter when you include authentication information in a query string instead of in the HTTP authorization header.

Type: string

Valid Values: AWS4-HMAC-SHA256

Required: Conditional

X-Amz-Credential

The credential scope value, which is a string that includes your access key, the date, the region you are targeting, the service you are requesting, and a termination string ("aws4_request").

The value is expressed in the following format: *access_key/YYYYMMDD/region/service/aws4_request*.

For more information, see [Create a signed AWS API request](#) in the *IAM User Guide*.

Condition: Specify this parameter when you include authentication information in a query string instead of in the HTTP authorization header.

Type: string

Required: Conditional

X-Amz-Date

The date that is used to create the signature. The format must be ISO 8601 basic format (YYYYMMDD'T'HHMMSS'Z'). For example, the following date time is a valid X-Amz-Date value: 20120325T120000Z.

Condition: X-Amz-Date is optional for all requests; it can be used to override the date used for signing requests. If the Date header is specified in the ISO 8601 basic format, X-Amz-Date is not required. When X-Amz-Date is used, it always overrides the value of the Date header. For more information, see [Elements of an AWS API request signature](#) in the *IAM User Guide*.

Type: string

Required: Conditional

X-Amz-Security-Token

The temporary security token that was obtained through a call to AWS Security Token Service (AWS STS). For a list of services that support temporary security credentials from AWS STS, see [AWS services that work with IAM](#) in the *IAM User Guide*.

Condition: If you're using temporary security credentials from AWS STS, you must include the security token.

Type: string

Required: Conditional

X-Amz-Signature

Specifies the hex-encoded signature that was calculated from the string to sign and the derived signing key.

Condition: Specify this parameter when you include authentication information in a query string instead of in the HTTP authorization header.

Type: string

Required: Conditional

X-Amz-SignedHeaders

Specifies all the HTTP headers that were included as part of the canonical request. For more information about specifying signed headers, see [Create a signed AWS API request](#) in the *IAM User Guide*.

Condition: Specify this parameter when you include authentication information in a query string instead of in the HTTP authorization header.

Type: string

Required: Conditional

Common Errors

This section lists the errors common to the API actions of all AWS services. For errors specific to an API action for this service, see the topic for that API action.

AccessDeniedException

You do not have sufficient access to perform this action.

HTTP Status Code: 400

IncompleteSignature

The request signature does not conform to AWS standards.

HTTP Status Code: 400

InternalFailure

The request processing has failed because of an unknown error, exception or failure.

HTTP Status Code: 500

InvalidAction

The action or operation requested is invalid. Verify that the action is typed correctly.

HTTP Status Code: 400

InvalidClientTokenId

The X.509 certificate or AWS access key ID provided does not exist in our records.

HTTP Status Code: 403

NotAuthorized

You do not have permission to perform this action.

HTTP Status Code: 400

OptInRequired

The AWS access key ID needs a subscription for the service.

HTTP Status Code: 403

RequestExpired

The request reached the service more than 15 minutes after the date stamp on the request or more than 15 minutes after the request expiration date (such as for pre-signed URLs), or the date stamp on the request is more than 15 minutes in the future.

HTTP Status Code: 400

ServiceUnavailable

The request has failed due to a temporary failure of the server.

HTTP Status Code: 503

ThrottlingException

The request was denied due to request throttling.

HTTP Status Code: 400

ValidationException

The input fails to satisfy the constraints specified by an AWS service.

HTTP Status Code: 400

Calling the API by making HTTP Query requests

This section contains general information about using the Query API for AWS Account Management. For details about the API operations and errors, see the [API Reference](#).

Note

Instead of making direct calls to the AWS Account Management Query API, you can use one of the AWS SDKs. The AWS SDKs consist of libraries and sample code for various programming languages and platforms (Java, Ruby, .NET, iOS, Android, and more). The SDKs provide a convenient way to create programmatic access to AWS Account Management and AWS. For example, the SDKs take care of tasks such as cryptographically

signing requests, managing errors, and retrying requests automatically. For information about the AWS SDKs, including how to download and install them, see [Tools for Amazon Web Services](#).

With the Query API for AWS Account Management, you can call service actions. Query API requests are HTTPS requests that must contain an Action parameter to indicate the operation to be performed. AWS Account Management supports GET and POST requests for all operations. That is, the API doesn't require you to use GET for some actions and POST for others. However, GET requests are subject to the limitation size of a URL. Although this limit is browser dependent, a typical limit is 2,048 bytes. Therefore, for Query API requests that require larger sizes, you must use a POST request.

The response is an XML document. For details about the response, see the individual action pages in the [API Reference](#).

Topics

- [Endpoints](#)
- [HTTPS required](#)
- [Signing AWS Account Management API requests](#)

Endpoints

AWS Account Management has a single global API endpoint that is hosted in the US East (N. Virginia) AWS Region.

For more information about AWS endpoints and Regions for all services, see [Regions and Endpoints](#) in the [AWS General Reference](#).

HTTPS required

Because the Query API can return sensitive information such as security credentials, you must use HTTPS to encrypt all API requests.

Signing AWS Account Management API requests

Requests must be signed using an access key ID and a secret access key. We strongly recommend that you don't use your AWS root account credentials for everyday work with AWS Account

Management. You can use the credentials for an AWS Identity and Access Management (IAM) user or temporary credentials such as you use with an IAM role.

To sign your API requests, you must use AWS Signature Version 4. For information about using Signature Version 4, see [Signing AWS API requests](#) in the *IAM User Guide*.

For more information, see the following:

- [AWS Security Credentials](#) – Provides general information about the types of credentials that you can use to access AWS.
- [Security best practices in IAM](#) – Offers suggestions for using the IAM service to help secure your AWS resources, including those in AWS Account Management.
- [Temporary security credentials in IAM](#) – Describes how to create and use temporary security credentials.

Quotas for AWS Account Management

Your AWS account has default quotas, formerly referred to as limits, for each AWS service. Unless otherwise noted, each quota is AWS Region-specific.

Each AWS account has the following quotas related to Account Management.

Resource	Quota
Maximum number of StartPrimaryEmailUpdate requests per target account	3 per 30 seconds
Number of alternate contacts in an AWS account	3 – one each for BILLING, SECURITY, and OPERATIONS
Number of concurrent region-opt requests per account	6
Number of concurrent region-opt requests per organization	50
Rate of AcceptPrimaryEmailUpdate requests per caller account	1 per second, burst to 1 per second
Rate of DeleteAlternateContact requests per account	1 per second, burst to 6 per second
Rate of DisableRegion requests per account	1 per second, burst to 1 per second
Rate of EnableRegion requests per account	1 per second, burst to 1 per second
Rate of GetAccountInformation requests per caller account	3 per second, burst to 3 per second
Rate of GetAlternateContact requests per account	10 per second, burst to 15 per second

Resource	Quota
Rate of GetContactInformation requests per account	10 per second, burst to 15 per second
Rate of GetGovCloudAccountInformation requests per account	3 per second, burst to 5 per second
Rate of GetPrimaryEmail requests per caller account	3 per second, burst to 3 per second
Rate of GetRegionOptStatus requests per account	5 per second, burst to 5 per second
Rate of ListRegions requests per account	5 per second, burst to 5 per second
Rate of PutAccountName requests per caller account	1 per second, burst to 1 per second
Rate of PutAlternateContact requests per account	5 per second, burst to 8 per second
Rate of PutContactInformation requests per account	5 per second, burst to 8 per second
Rate of StartPrimaryEmailUpdate requests per caller account	1 per second, burst to 1 per second

Manage accounts in India

If you sign up for a new AWS account and choose India for your contact and billing address, your user agreement is with Amazon Web Services India Private Limited (AWS India), a local AWS seller in India. AWS India manages your billing, and your invoice total is listed in Indian rupees (INR) instead of US dollars (USD). For information about managing an AWS account, see [Configure your AWS account](#).

If your account is with AWS India, follow the procedures in this topic to manage your account. This topic explains how to sign up for an AWS India account, edit information about your AWS India account, manage customer verification, and add or edit your Permanent Account Number (PAN).

As part of the credit card verification during sign up, AWS India charges your credit card 2 INR. AWS India refunds the 2 INR after verification is done. You might be redirected to your bank as part of the verification process.

Topics

- [Create an AWS account with AWS India](#)
- [Manage your customer verification information](#)

Create an AWS account with AWS India

AWS India is a local seller of AWS in India. If your contact and billing address is in India and you want to create an account, use the following procedure to sign up for an AWS India account.

To sign up for an AWS India account

1. Open the [Amazon Web Services home page](#).
2. Choose **Create an AWS account**.

Note

If you signed in to AWS recently, that option might not be there. Instead, choose **Sign in to the Console**. If **Create a new AWS account** still isn't visible, choose **Sign in to a different account**, and then choose **Create a new AWS account**.

3. Enter your account information, verify your email address, and choose a strong password for your account.
4. Choose **Business or Personal**. Personal accounts and business accounts have the same features and functions.
5. Enter your company or personal contact information. If your contact or billing address is based in India, in compliance with Indian Computer Emergency Response Team (CERT-In) regulations, AWS is required to collect and validate your identity information before granting you access to AWS services.

The name that you chose between your contact or billing information must exactly match the name that appears on the document you plan to use for customer verification. For example, if you plan to verify a business account using a Certificate of Incorporation, you must provide the business name that appears on the document. For a list of accepted document types, see [the section called “Accepted India documents for customer verification”](#).

6. After you have read the customer agreement, select the terms and conditions check box, and then choose **Continue**.
7. On the **Billing information** page, enter the payment method that you want to use. You must provide your CVV as part of the verification process.
8. Under **Do you have a PAN?**, choose **Yes** if you have a Permanent Account Number (PAN) that you would like to be displayed on your tax invoices, and then enter your PAN. If you do not have a PAN or want to add it after sign up, choose **No**.
9. Choose **Verify and continue**. AWS India charges your card 2 INR as part of the verification process. AWS India refunds the 2 INR after verification is done.
10. On the **Confirm your identity** page, select your primary purpose of account registration.
11. Choose the ownership type that best represents the owner of the account. If you choose a company, organization, or partnership as the ownership type, enter the name of a key managerial person. The key managerial person can be a director, head of operations, or a person in charge of operations in your business.
12. Depending on the ownership type you chose, choose an accepted India document type to use for verification and type your document information.

 Note

If you have a personal account and plan to use a driving license that is *not* issued by the Union of India, we recommend using a different personal document type for verification.

13. Choose the name you want to use for customer verification.

The names from your billing and contact information will appear for selection if they are associated with an Indian address. Make sure the name you choose matches the name on the document type you plan to use for customer verification. If you need to make changes to the name associated with your billing or contact address, you can do so after you complete account sign up.

14. Provide your consent to submit the information for verification, and then choose **Continue**.

You will be notified of the customer verification result by email after you complete account signup. You can also check the status on the **Customer verification** page in your account settings or in the AWS Health Dashboard later. You must pass customer verification to access AWS services.

15. Choose whether you want to verify your mobile phone number by **Text message (SMS)** or **Voice call**.

16. Select your country or region code, and then enter your mobile phone number.

17. Complete the security check.

18. Choose **Send SMS** or **Call Me Now**. After a few moments, you will receive a four-digit pin in an SMS or an automated call on your mobile phone.

19. On the **Confirm your identity** page, enter the pin you received and choose **Continue**.

20. On the **Select a support plan** page, select your support plan, and then choose **Complete sign up**. After your payment method and customer verification is verified, your account will be activated and you will receive an email confirming the activation of your account.

 Note

If you have completed customer verification and you edit the name, address, or document previously used to verify your identity, you may need to update and

complete your customer verification again. For more information, see [the section called “Edit your customer verification information”](#).

Manage your customer verification information

In compliance with Indian Computer Emergency Response Team (CERT-In) regulations, AWS is required to collect and validate your identity information before granting you new or continued access to AWS services. Your identity must be verified using the name from the India billing or contact address you provided. During verification, AWS will check if the document number is valid and if the name you provide matches the name associated with the document you use for customer verification. The name that you choose between your contact or billing information must exactly match the name that appears on the document.

To update your billing name and address, see the [Payment preferences](#) page. To update your contact name and address, see [the section called “Update the primary contact for your AWS account”](#). If you edit any information you previously used for customer verification, such as the name or India-based address from your billing or contact information, you may need to update and re-submit your customer verification information.

Check your customer verification status

You can view your customer verification status at any time on the **Customer verification** page. If your verification status is **Verification required** or **Verification failed**, create or update your customer verification information and submit it for verification.

Create your customer verification information

To complete customer verification, you will need to provide information from an accepted India document. For a list of accepted document types, see [the section called “Accepted India documents for customer verification”](#).

1. Sign into the [AWS Management Console](#).
2. On the navigation bar, in the upper-right corner, choose your account name (or alias), and then choose **Account**.
3. Under **Other settings**, choose **Customer verification**.

If you have not yet provided your customer verification information before, you will see the **Create customer verification** page.

4. Choose the name that exactly matches the name on the document you plan to use for customer verification. For example, if you plan to verify a business account using a Certificate of Incorporation, you must provide the business name that appears on the document.
5. Provide the remaining information requested on the page. Depending on the document type you chose, you may need to upload a copy of both the front and back of the document. If you upload an image file, make sure all the information in the document is visible and legible.
6. Choose **Submit**.

You will be notified of the customer verification result and any next steps by email or on the AWS Health Dashboard.

Edit your customer verification information

You can edit your customer verification information, such as your primary purpose of account registration, your organization type, and the name, document type, document upload, or document information you want to use for verification.

If you edit the name or document type to use for customer verification, or update any document information, saving the changes will require your identity to be verified again.

1. Sign into the [AWS Management Console](#).
2. On the navigation bar, in the upper-right corner, choose your account name (or alias), and then choose **Account**.
3. Under **Other settings**, choose **Customer verification**.
4. Choose **Edit**, and then update the information you want to change.

As you update the information, note the following guidance:

- If you choose a different name, the name must exactly match the name on the document you plan to use for customer verification. For example, if you plan to verify a business account using a Certificate of Incorporation, you must provide the business name that appears on the document.

- If you choose a different document type, you will need to upload a copy of the front and back (if applicable) of the document. All the information in the document upload should be visible and legible.
- If you have a personal account and plan to use a driving license that is *not* issued by the Union of India, we recommend using a different personal document type for verification.

For a list of accepted document types, see [the section called “Accepted India documents for customer verification”](#).

5. Choose **Submit**.

If your identity must be verified again due to the type of changes you saved, you will be notified of the customer verification result and any next steps by email. You can also view the results by returning to the **Customer verification** page or in the AWS Health Dashboard.

Accepted India documents for customer verification

The following document types issued by the Indian government are accepted for customer verification.

Note

The links shared below are subject to change by the government.

- **PAN Card** - Available in both digital and physical formats, the Permanent Account Number (PAN) card contains a unique alphanumeric identifier issued by the Income Tax Department of India to individuals, companies, and entities. A PAN consists of ten characters, including letters and numbers, in the format **AAAAA1111A**. To use this document for verification, you must also provide the date of birth (individual) or date of incorporation (business) that appears on the PAN document and upload the front side of the card. You can go to the [Income Tax Department's official website](#) to check the validity of your PAN.
- **Voter ID Card/EPIC** - The voter ID card, also known as the Electors Photo Identity Card (EPIC), contains a unique identification number issued by Election Commission of India to eligible voters in India. A voter ID/EPIC number consists of ten characters, including letters and numbers. You can go to the official website of the [Election Commission of India](#) to check the validity of your voter ID. To use this document for verification, you must upload both the front and back side of the card.

- **Driving License** - If your driving license is *not* issued by the Union of India, we recommend using a different document type for verification. A driving license number consists of 12-16 characters, including letters, numbers, and a space or hyphen. To use this document for verification, you must provide your date of birth and upload both the front and back side of the card. You can go to the [Parivahan Sewa site](#) of the Ministry of Road Transport and Highways to check the validity of your driving license.
- **Certificate of Incorporation** - A certificate of incorporation is a document issued by the Ministry of Corporate Affairs (MCA) that dates the registration of a business as a legal entity. The certificate is used to uniquely identify and track companies registered in India. Each certificate contains a Corporate Identification Number (CIN), which is a unique alphanumeric identifier consisting of 21 characters, including letters and numbers. To use this document for verification, you must upload the certificate of incorporation document. You can go to the [Ministry of Corporate Affairs portal](#) to check the validity of your CIN.

Different India document types are accepted for personal and business accounts:

- For personal accounts - PAN card, voter ID card/EPIC, and driving license.
- For business accounts - PAN card and certificate of incorporation.

Manage your AWS India account

Except for the following tasks, the procedures for managing your account are the same as accounts created outside of India. For general information about managing your account, see [Configure your account](#).

Use the AWS Management Console to perform the following tasks:

- [Adding or editing a Permanent Account Number](#)
- [Editing multiple Permanent Account Numbers](#)
- [the section called “Manage your customer verification information”](#)
- [Edit multiple Goods and Services Tax Numbers \(GSTs\)](#)
- [View a tax invoice](#)

Document history for the Account Management User Guide

The following table describes the documentation releases for AWS Account Management.

Change	Description	Date
<u>New account name APIs</u>	Support for new <u>GetAccountInformation</u> , and <u>PutAccountName</u> APIs to view or modify an account name.	April 22, 2025
<u>End of support for editing security challenge questions</u>	Removed the <i>Edit your security challenge questions</i> topic from the guide since support has ended.	January 6, 2025
<u>New primary email APIs</u>	Support for new <u>GetPrimaryEmail</u> , <u>StartPrimaryEmailUpdate</u> , and <u>AcceptPrimaryEmailUpdate</u> APIs to centrally update the root user email address for any member account in AWS Organizations. For more information, see <u>Updating the root user email address for a member account</u> in the <i>AWS Organizations User Guide</i> .	June 6, 2024
<u>Rewrite of the close account topic</u>	Completely overhauled the entire close account topic including adding steps for	February 1, 2024

	how to close member and management accounts.	
<u>End of support for adding new security challenge questions</u>	Added new content noting that the option to add new challenge questions was removed from the Accounts page.	January 5, 2024
<u>End of support for the aws-portal namespace</u>	AWS Identity and Access Management (IAM) actions that were previously used to manage your account (for example, aws-portal:ModifyAccount and aws-portal:ViewAccount) have reached the end of standard support.	January 1, 2024
<u>Rewrite of the Regions topic</u>	Completely overhauled the entire Regions topic including adding expand and collapse controls.	October 8, 2023
<u>Relocated root user topics to the IAM User Guide</u>	Consolidated discussion about root users into one topic, added cross reference links to root user topics that were moved to the IAM User Guide.	September 18, 2023
<u>New section added to the primary account contact topic</u>	Added new <i>Phone number and email address requirements</i> section.	September 12, 2023
<u>New contact information APIs</u>	Support for new GetContactInformation and PutContactInformation APIs.	July 22, 2022

[AWS Account Management now supports updating alternate contacts via the AWS Organizations console.](#)

You can now update your organization's alternate contacts via AWS Organizations console using Account API permissions provided by updated AWS Organizations managed policies.

February 8, 2022

[Initial release](#)

Initial release of the AWS Account Management Reference Guide

September 30, 2021